


STECKVERBINDER M. GLEICHR. F. MAGNETV. (Order no. 028338)

Solenoid plug for safety switch NZ.VZ.VS

▶ With rectifier for the connection of AC 110 V – AC 230 V.

Dimensional drawings

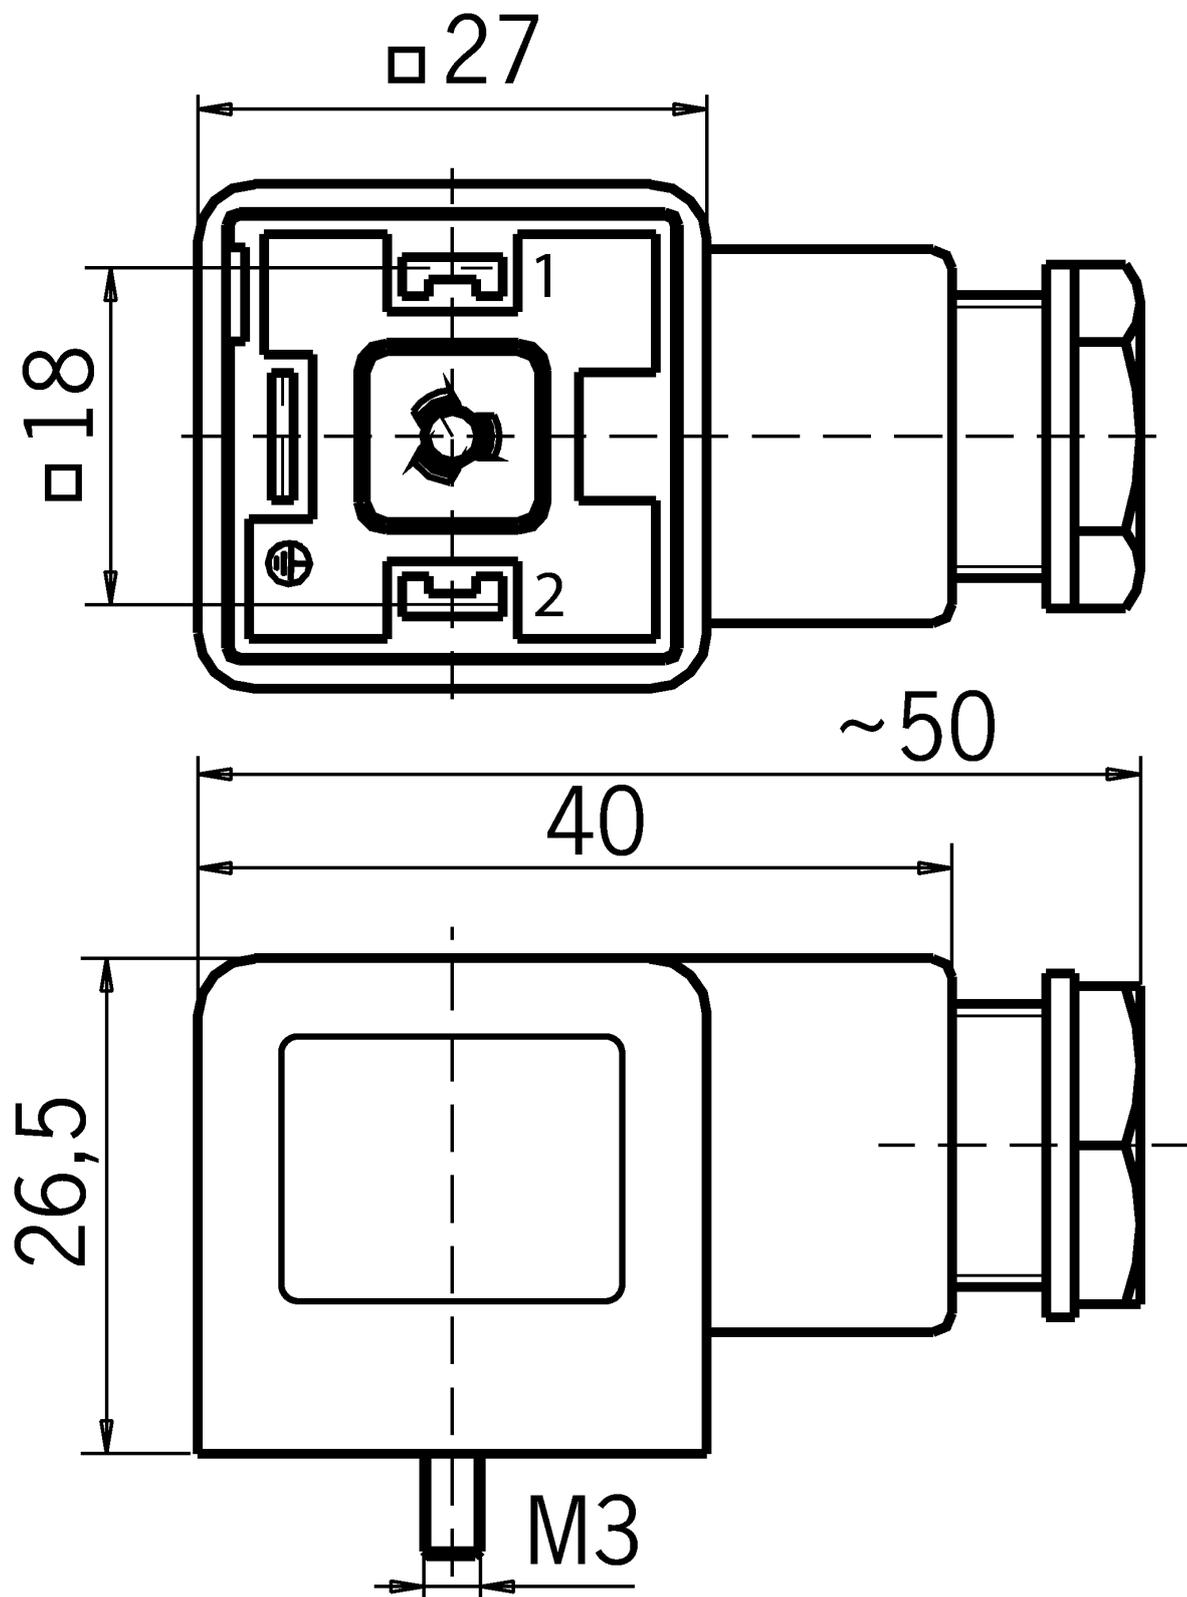

Technical data

Electrical connection values

Connection cross section	max. 1.5 mm ²
Rated voltage	AC/DC 250 V
Rated current I	AC 2000 mA

Mechanical values and environment

Connection type	Screw terminal
Connection type	Female plug
Plug connector designation	GDML 2011 GB1
Storage temperature	-40 ... 90 °C
Cable outlet	Angle
Cable diameter	Clamping range 4.5 ... 11 mm
Number of pins	3 (2+PE)
Degree of protection	IP65 (Seal required)
Plug lock	Screw connection
Ambient temperature	-40 ... 90 °C
Material	Plug housing Plastic

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/028338/?#downloads-tab>