


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____

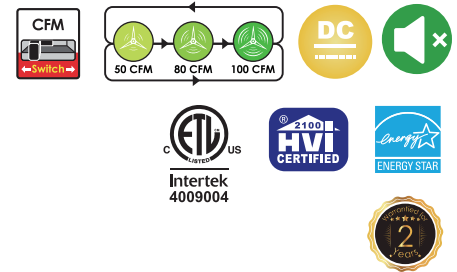

Specifications


Model No.		<input type="checkbox"/> VO-FN4W14-DC-3SPD
General	Volts	AC 120V/60Hz
	Watts	6W/9W/14W
	Amps(Current)	0.07A/0.13A/0.18A
	Life Span	5000 hours
	Static Pressure in inches w.g.	0.1
	Air Volume	50/80/100 CFM
	Speed	/
	Noise	0.3/0.7/1.1 Sones
	Continuously Run	Yes
Electrical	Motor Type	DC Motor
	Type of Motor Bearing	Ball Bearing
	Power Factor	<1
	Operation Position	Horizontal
	Thermal Fuse Protection	Yes
	Temperature Rise	< 70K
	Capacity	/
	Power Cord	cUL Listed 18AWG Power Cord
Physical	Housing Dimension	10-1/4x10-1/4x3-3/8inch
	Grille Dimension	13x13inch
	Duct Dimension	4 inch oval
	Housing Material	0.5mm Galvanized Steel Original / Silver Finish
	Grille Material	ABS Plastic
	Wheel Impeller Material	PP+10%GF
Compliance	Safety Listing	cETL-Listed
	Energy Star	Yes
	HVI	Yes

Features & Specifications


Construction	<ul style="list-style-type: none"> • Continuously Running Fan • Galvanized-steel housing protects from moisture erosion for long term. • The wheel impeller made of flame retardant polypropylene reduce damage and risk of fire accident. • Elegant grille design compliments any décor; built-in damper reduces back drafting • Thermal Fuse effectively protects from risking electric leaking. • Dual ball bearing motor made of high-quality stainless steel ensure smooth rotation and reduce friction.
Mounting	<ul style="list-style-type: none"> • Ceiling mount. Mounting foldable ears and hanger bars assist for new construction and retrofit.
Performance Data	<ul style="list-style-type: none"> • 50/80/100 CFM, Powerful ventilation to remove moisture and reduce the risk of mold or mildew in most full baths • 0.3/0. /1.1 Sones for whisper quiet operation • 6/9/14 watt for energy saving.
Compliances	<ul style="list-style-type: none"> • cETL listed for use in insulated ceilings(type I.C.). cETL listed for use over bathtubs or showers when connected to GFCI-protected branch. • ENERGY STAR ® certified for energy efficiency & savings • HVI Certified

Dimensions & Weights

Model	VO-FN4W14-DC-3SPD
Housing Diameter in.(cm)	10 1/4"x10 1/4"x3 3/8" (26 x 26 x 8.5 cm)
Grille Diameter in.(cm)	13" x 13" (33 x 33 cm)
Net weight kgs(lbs)	3.16 kgs (6.97 lbs)

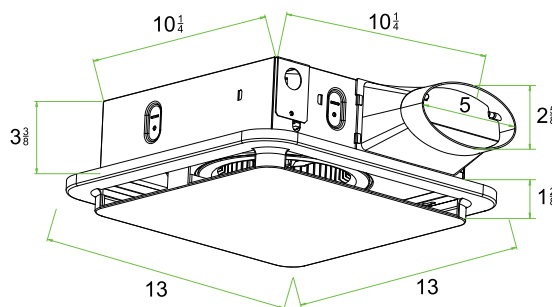

Product Details

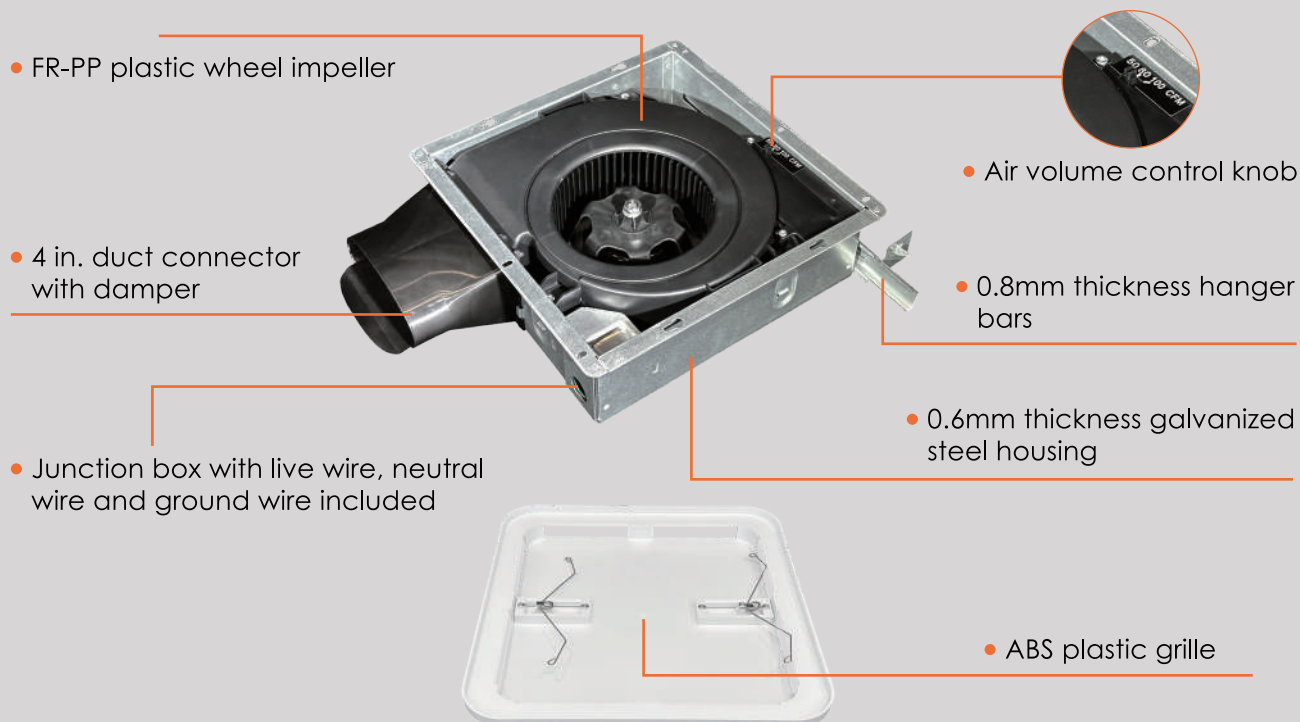

Simple installation manual drawing

