

## NZ2RS-538SEM4AS1 (Order no. 095046)

### Safety switch NZ.RS ASi, roller plunger, plug connector M12

- ▶ Roller plunger, steel roller  $\varnothing$  12 mm
- ▶ Plug connector M12, 4-pin
- ▶ 2 pos. driven contact



### Approach direction



Horizontal

Can be adjusted in 90° steps

### AS-Interface inputs

D0, D1 Positively driven contact 1

D2, D3 Positively driven contact 2

### AS-Interface outputs

D1 LED red

D2 LED green


### LED indicator

The Power LED indicates the operating voltage on the bus.

The Fault LED indicates if a fault has been detected on the AS-Interface bus.

The green and the red LEDs can be controlled as required by the control system via the bus using bits D1 and D2.


## Dimensional drawings

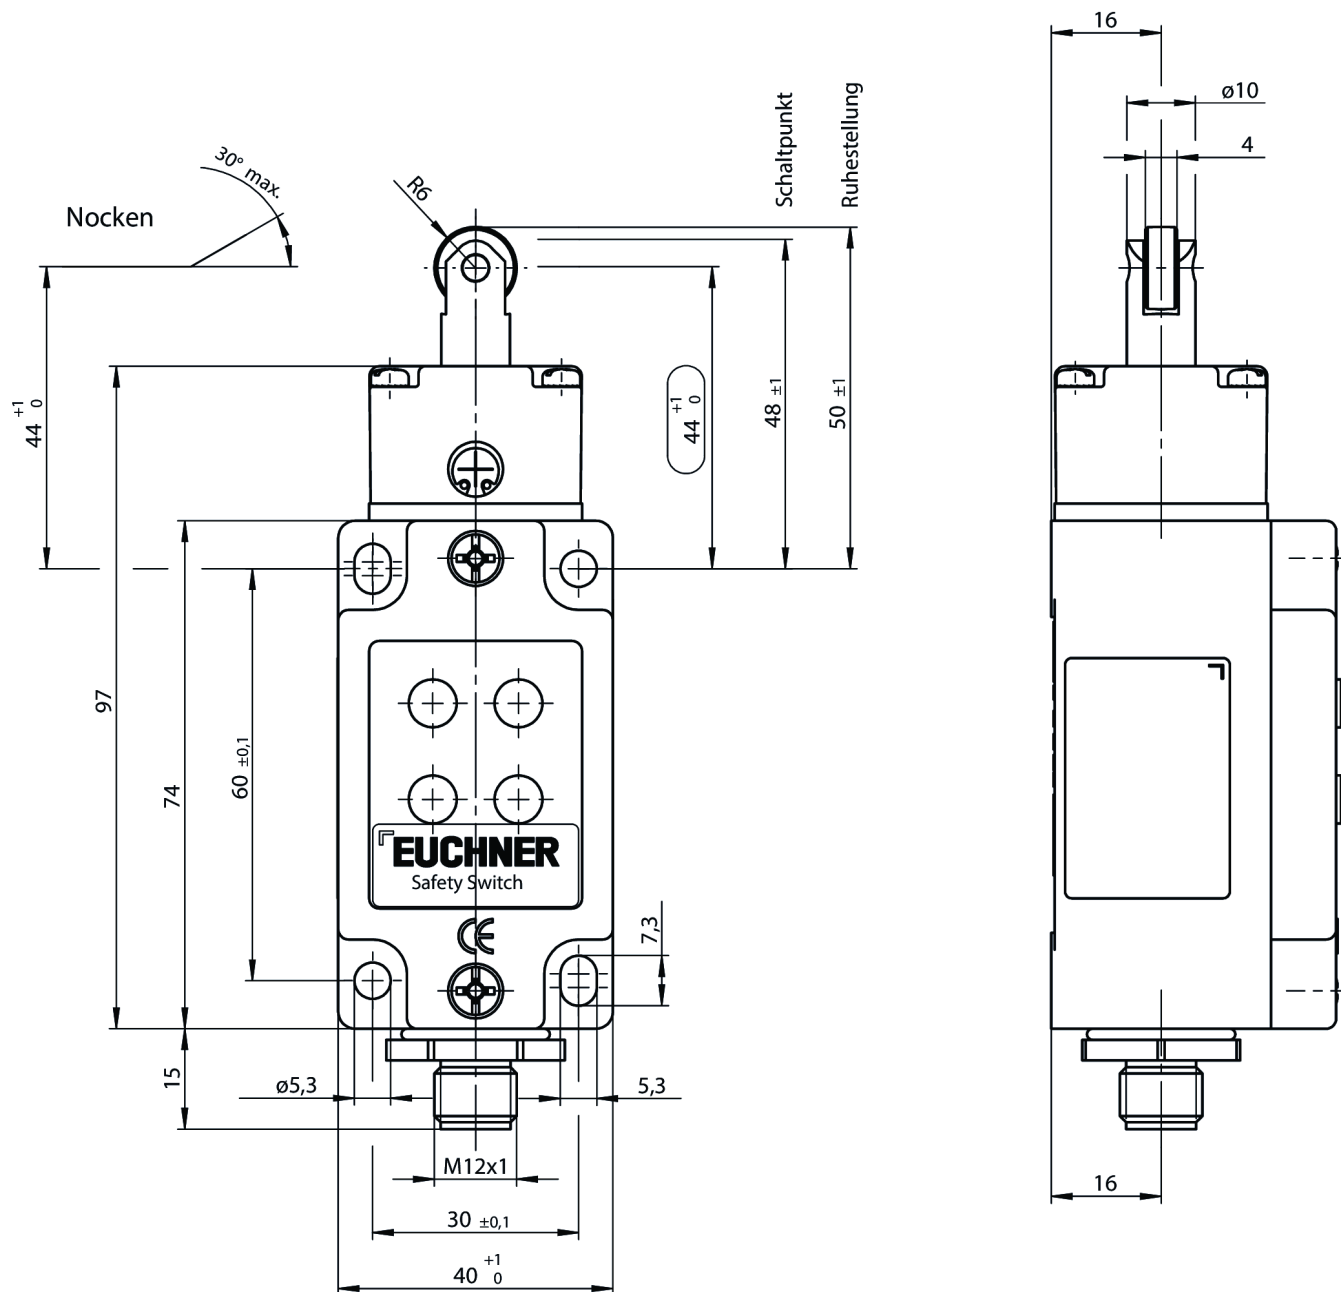

Connection examples

n. c.

ASi -

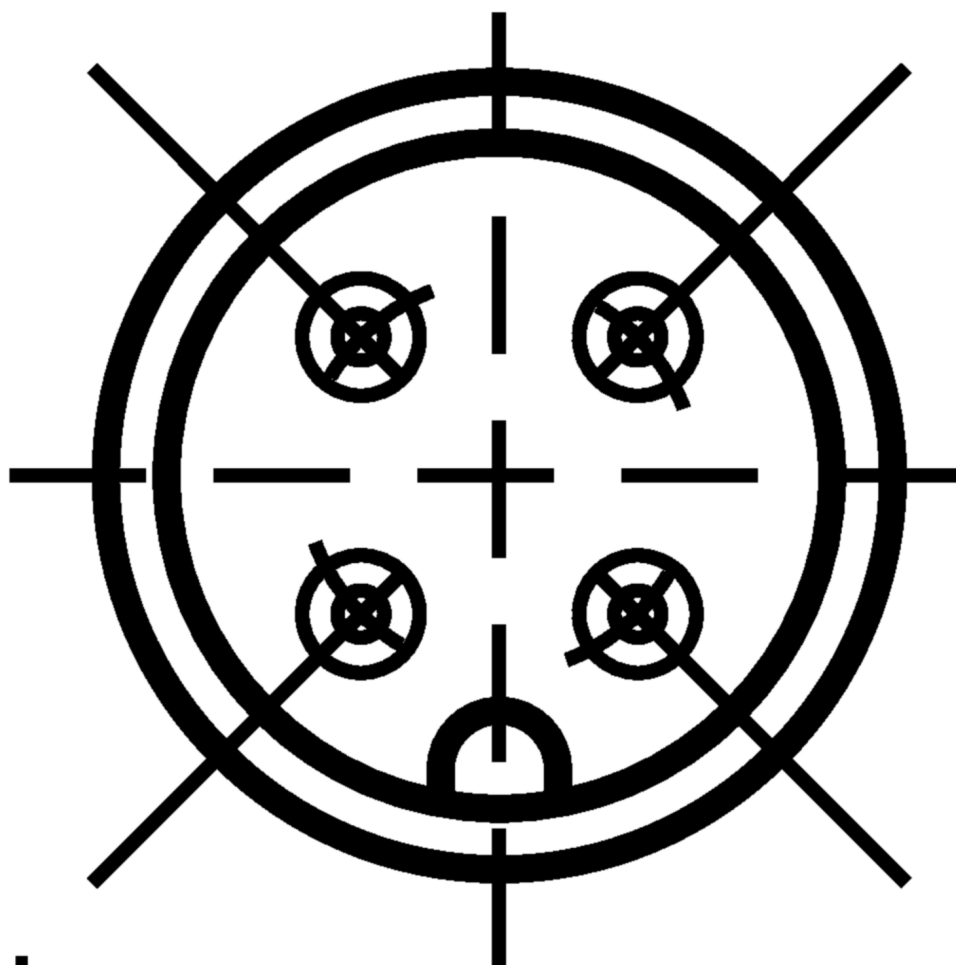

ASi +

n. c.

View of connection side