


## SPIRALLEITUNG 23-ADRIG 3,9M (Order no. 087408)

Connecting cable for hand-held pendant stations HBA/HBM/HBL/ZSM, coiled


- ▶ PUR cable, coiled
- ▶ Cable length 3.9 m
- ▶ With flying leads
- ▶ With 23 cores, cut-off cleanly

### Dimensional drawings

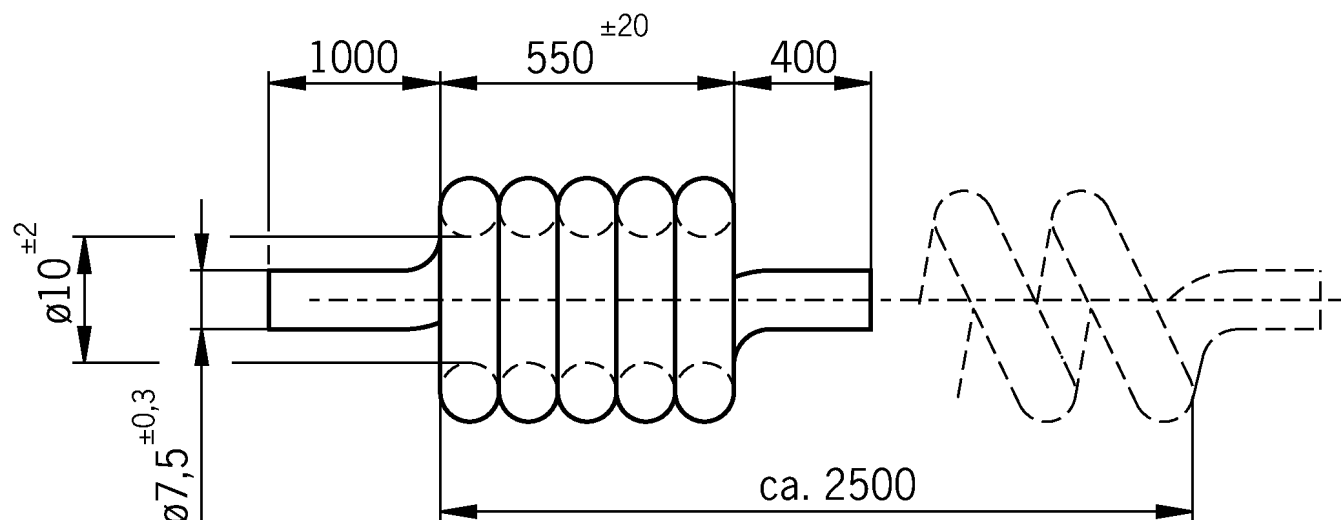

Cable length 3.9 m

Connection examples

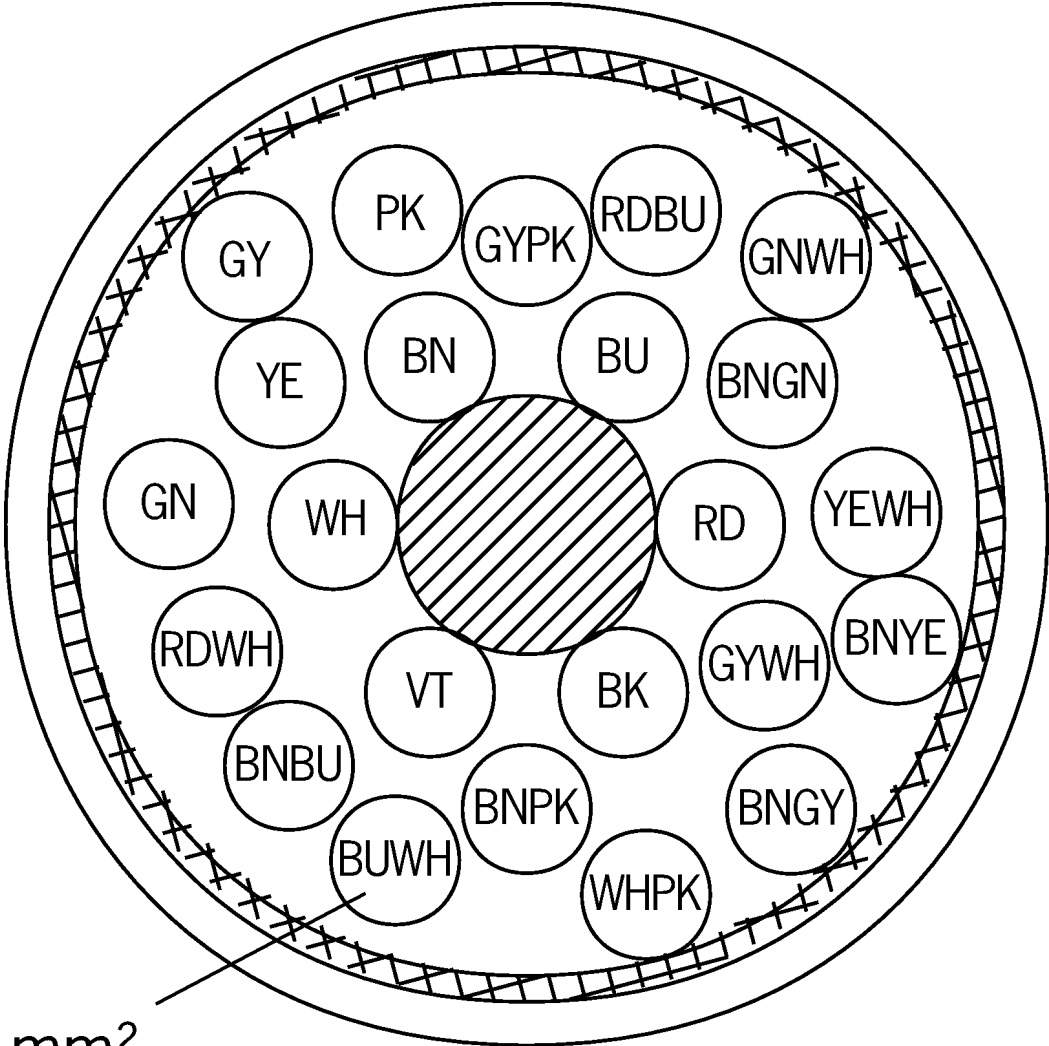

23 x 0,14 mm<sup>2</sup>

## Technical data

### Electrical connection values

Cable shielding	Yes (Cu thread covering, optical coverage approx. 90%)
specific conductor resistance	max. 145 Ω/km

### Mechanical values and environment

Conductor identification	Color code according to DIN 47100
Conductor cross-section	0.14 mm <sup>2</sup>
Number of conductors	23
Dynamic bending radius	15 x cable diameter
Static bending radius	10 x cable diameter
Storage temperature	-40 ... 80 °C
Cable type	coiled
Cable diameter	7.5 mm -0,3 ... +0,3 mm
Cable length	3.9 m (extended)
Sheath color	black matte
Cable ambient temperature (dynamic)	-10 ... 70 °C
Cable ambient temperature (static)	-40 ... 80 °C
Material	
	Sheath PUR

### Connection 1, 2

Conductor end	trimmed smooth
Connection type	flying lead