

BETAETIGER-S-WQT-SN (Order no. 095740)

Actuator S, bent, for safety switch SGA/SGP/STA/STP/STM

- ▶ Two safety screws included



Notice

S-...-SN actuators must not be used in conjunction with insertion funnels. S-...-LN actuators must be used for insertion funnels.


Bent actuator

Suitable for a maximum tensile force of 1000 N.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

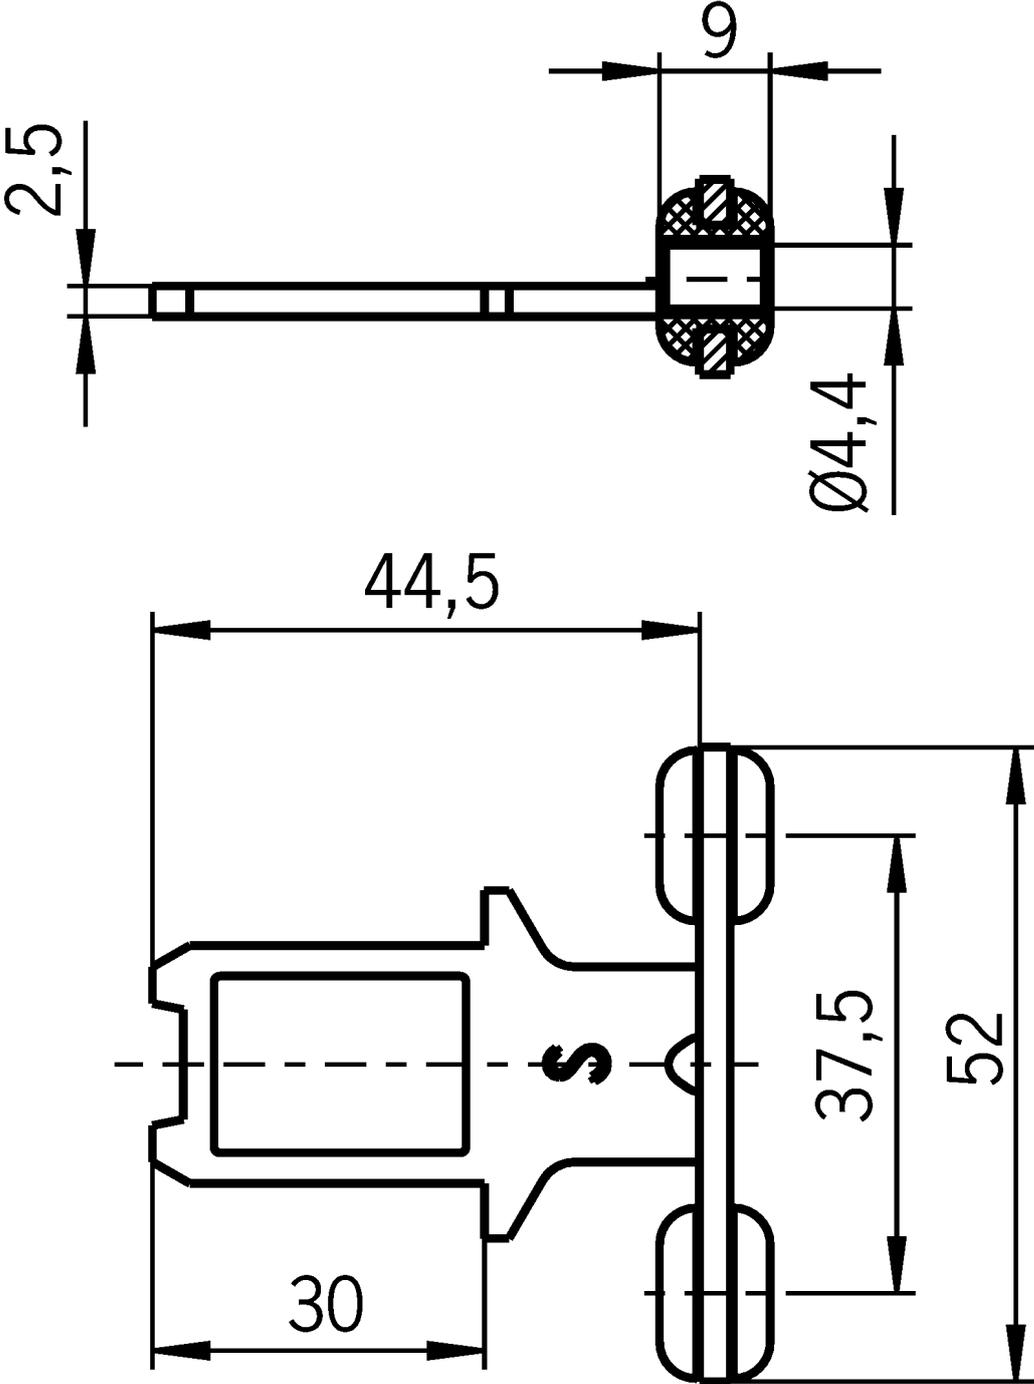

Technical data

Approvals



Mechanical values and environment

Storage temperature	-25 ... 70 °C
Overtravel	max. 5 mm
Door radius	min. 300 mm
Material	
Screw	Stainless steel
Rubber bush	NBR
Actuator	Stainless steel
Locking force F_{max}	max. 1000 N reduced locking force by actuator

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----