


MGB-L1-APA-AH9A1-S5-L-116429 (Order no. 116429)

Locking module MGB-L1-APA... (guard locking by spring force) with 3 pushbuttons, incl. label carrier, M12 for enabling switch, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ 3 pushbuttons (illuminated, bu, wh, ye)
- ▶ incl. adhesive labels
- ▶ With plug connector RC18
- ▶ With plug connector M12 for enabling switch
- ▶ Unicode

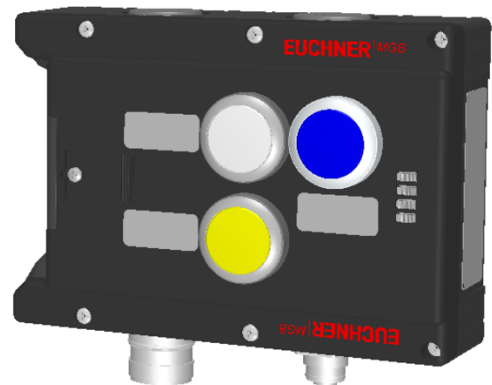

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault

Pushbuttons

- S1 1 NO contact, blue, illuminated
- S2 1 NO contact, white, illuminated
- S3 1 NO contact, yellow, illuminated










Connection for enabling switch

The device has an M12 plug connector for the direct connection of an enabling switch (e.g. ZSA, order no.: 110560).

Adhesive labels

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

Dimensional drawings

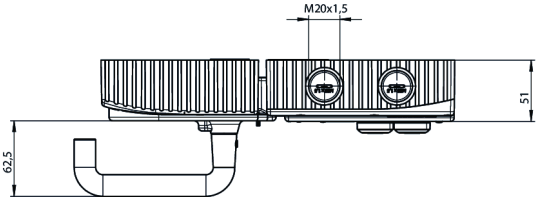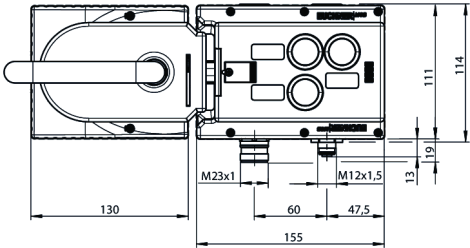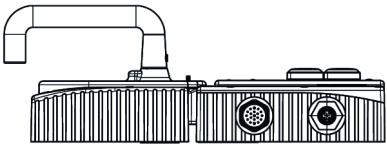

Dimensional drawings

