

ZSM2100-099714 (Order no. 099714)

ZSM, LED, + and – buttons, vibration motor

- ▶ 3-stage function
- ▶ Vibration signal
- ▶ LED indicator
- ▶ + and – buttons
- ▶ Straight connecting cable, 5 m



3-stage function

Enabling function is active only in the second stage (center position, actuating point). If the pushbutton is released or pushed further (panic function), the enabling is removed (dependent on the wiring, see function sequence).

Vibration signal

The vibration signal is used for tactile feedback of the enabling position.

LED indicator

The LED indicator is used for visual feedback directly at the enabling switch.


+ and – buttons

These pushbuttons can be configured individually. For example, for moving axes in the positive or negative direction.

Cable

The high-quality connecting cables are available in a straight version.

Dimensional drawings

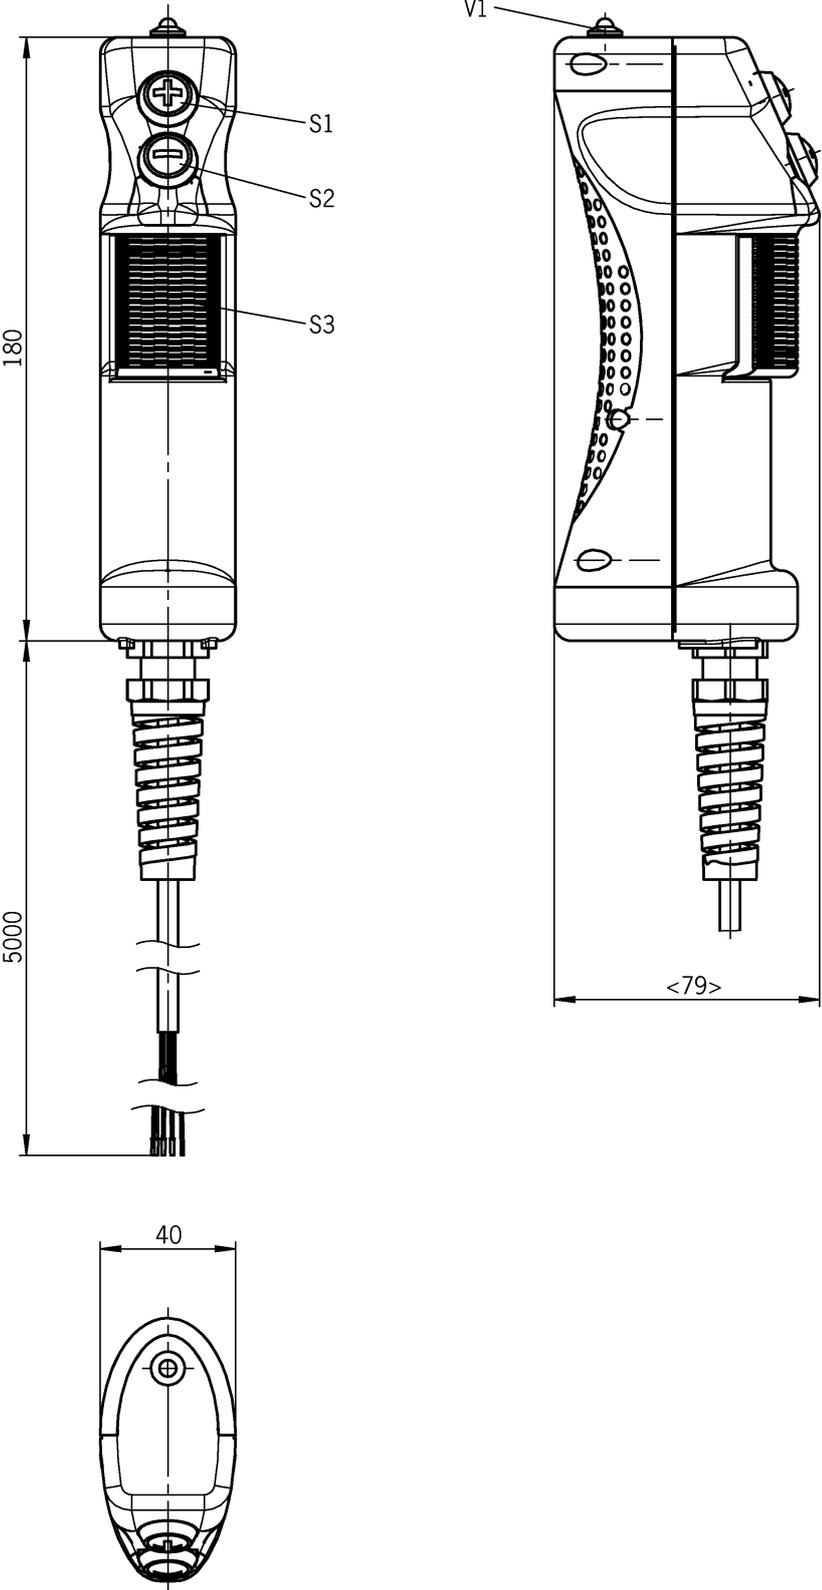

Connection examples

