

CMS-E-BR (Order no. 085537)

Evaluation unit CMS-E-BR, 1 safety contact, 1 auxiliary contact, 1 feedback loop can be connected

- ▶ 4 read heads can be connected
- ▶ 1 safety contact
- ▶ 1 auxiliary contact
- ▶ 1 feedback loop can be connected



Functional description

The evaluation unit CMS-E-BR is suitable for the direct connection of up to 4 read heads.



Category/PL according to EN ISO 13849-1

- ▶ Category 4/PL e with only one read head connected
- ▶ Max. category 3/PL d with more than one read head connected

Notice:

At low approach speeds in the z direction, the time offset when switching the reed contacts must not be more than 150 ms.

Dimensional drawings

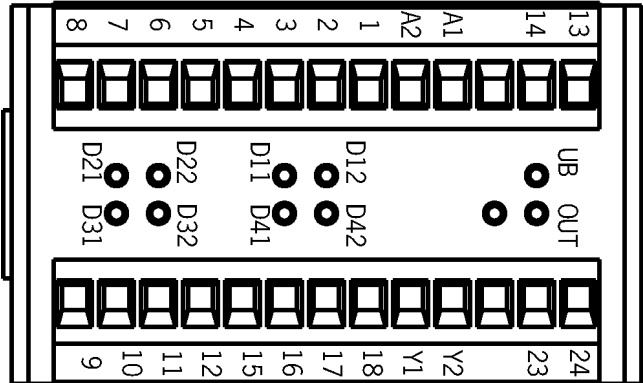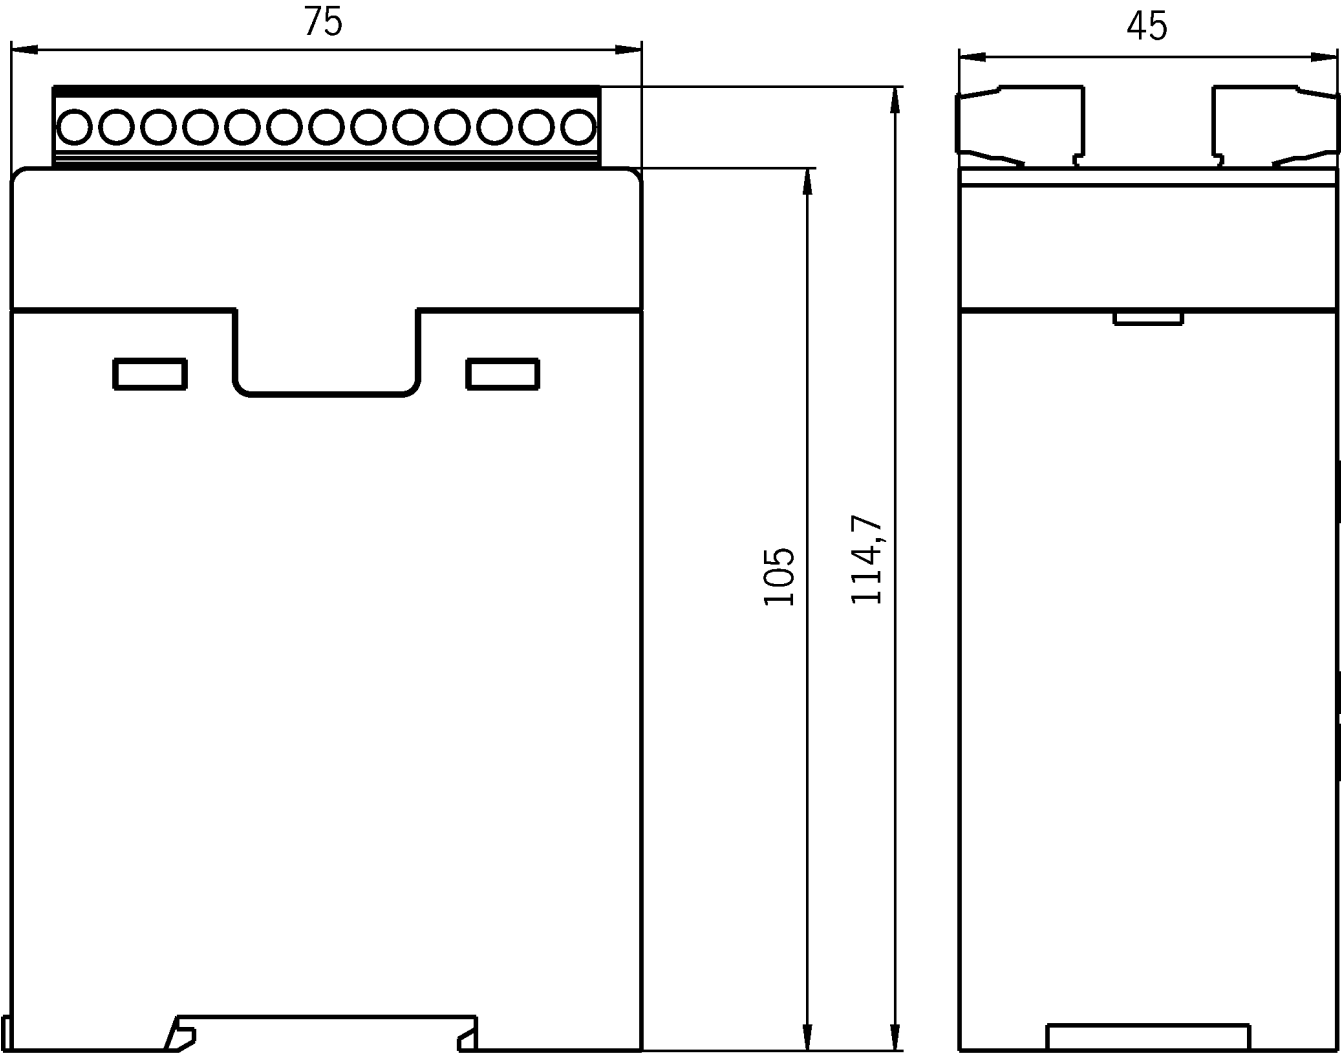

Connection examples

