

MGB2-L1HB-PN-U-S4-DA-R-156386 (Order no. 156386)

Complete set MGB2-L1...-PN (2 pushbuttons, emergency stop, closed-circuit current principle, door hinge on right)

- ▶ Guard locking with guard lock monitoring
- ▶ Illuminated emergency stop according to ISO 13850
- ▶ 2 illuminated pushbuttons
- ▶ 3 slide-in labels
- ▶ Connection via plug connector M12, D-coded
- ▶ Integrated switch
- ▶ Adjustable door hinge; factory setting: right
- ▶ Unicode



Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.
L1... (closed-circuit current principle)

PROFINET connection

Plug connector M12 D-coded (7/8" plug and M12 plug, D-coded) according to IEC 61076-2-101

PROFINET switch

Linear topology network structure due to integrated switch (supports MRP).

Lens set


The color of the pushbuttons can be selected using the lens set 120344 included (5 colors).

Slide-in labels


The user can produce custom labeling using the enclosed slide-in labels. (3 pcs., blank)

Dimensional drawings

...-R-...

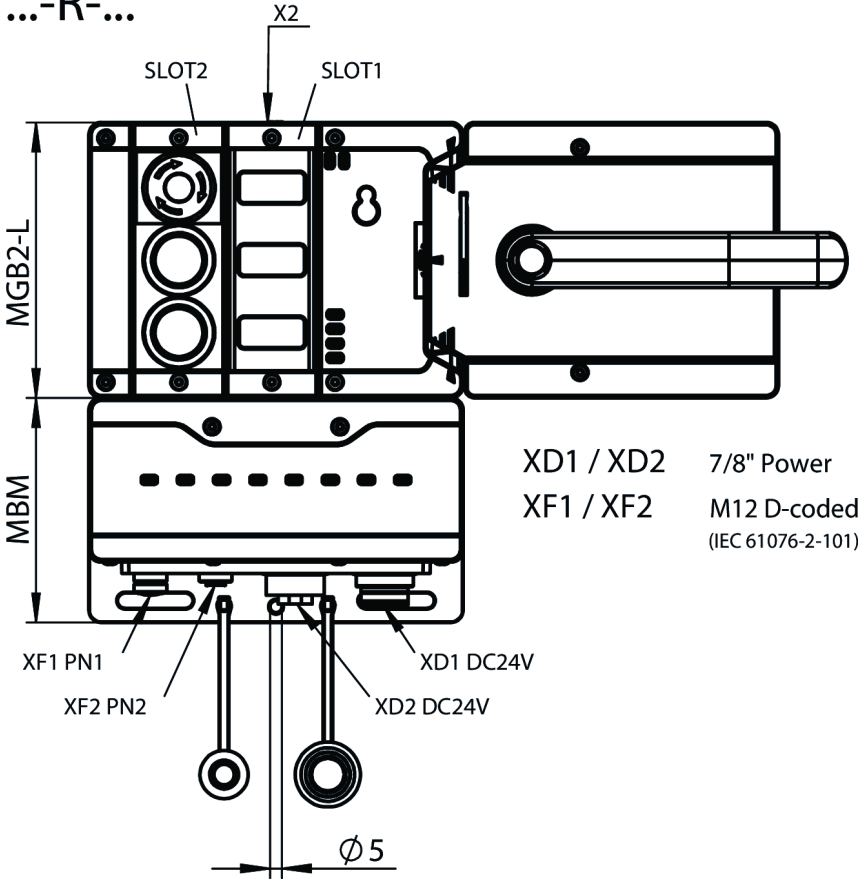

...-L-...

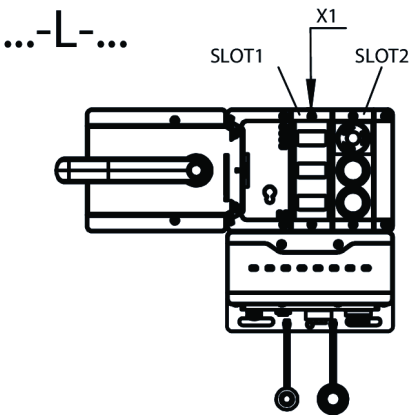

Dimensional drawings

