

CEM-A-LH10K-S2-10V (Order no. 102822)

Read head CEM-A-LH10K-S2... with guard locking without guard lock monitoring with remanence

- ▶ Read head with guard locking without guard lock monitoring
- ▶ Locking force 1000 N
- ▶ With remanence
- ▶ Connection, CES evaluation unit: Cable 10 m, PVC
- ▶ Connection, solenoid operating voltage: M8 male plug
- ▶ Connection, LED indicator: M8 female plug
- ▶ Up to category 4 according to EN ISO 13849-1




To be ordered separately:


- ▶ Evaluation unit CES-AZ

- ▶ Actuator CEM-A-BH10

Approach direction

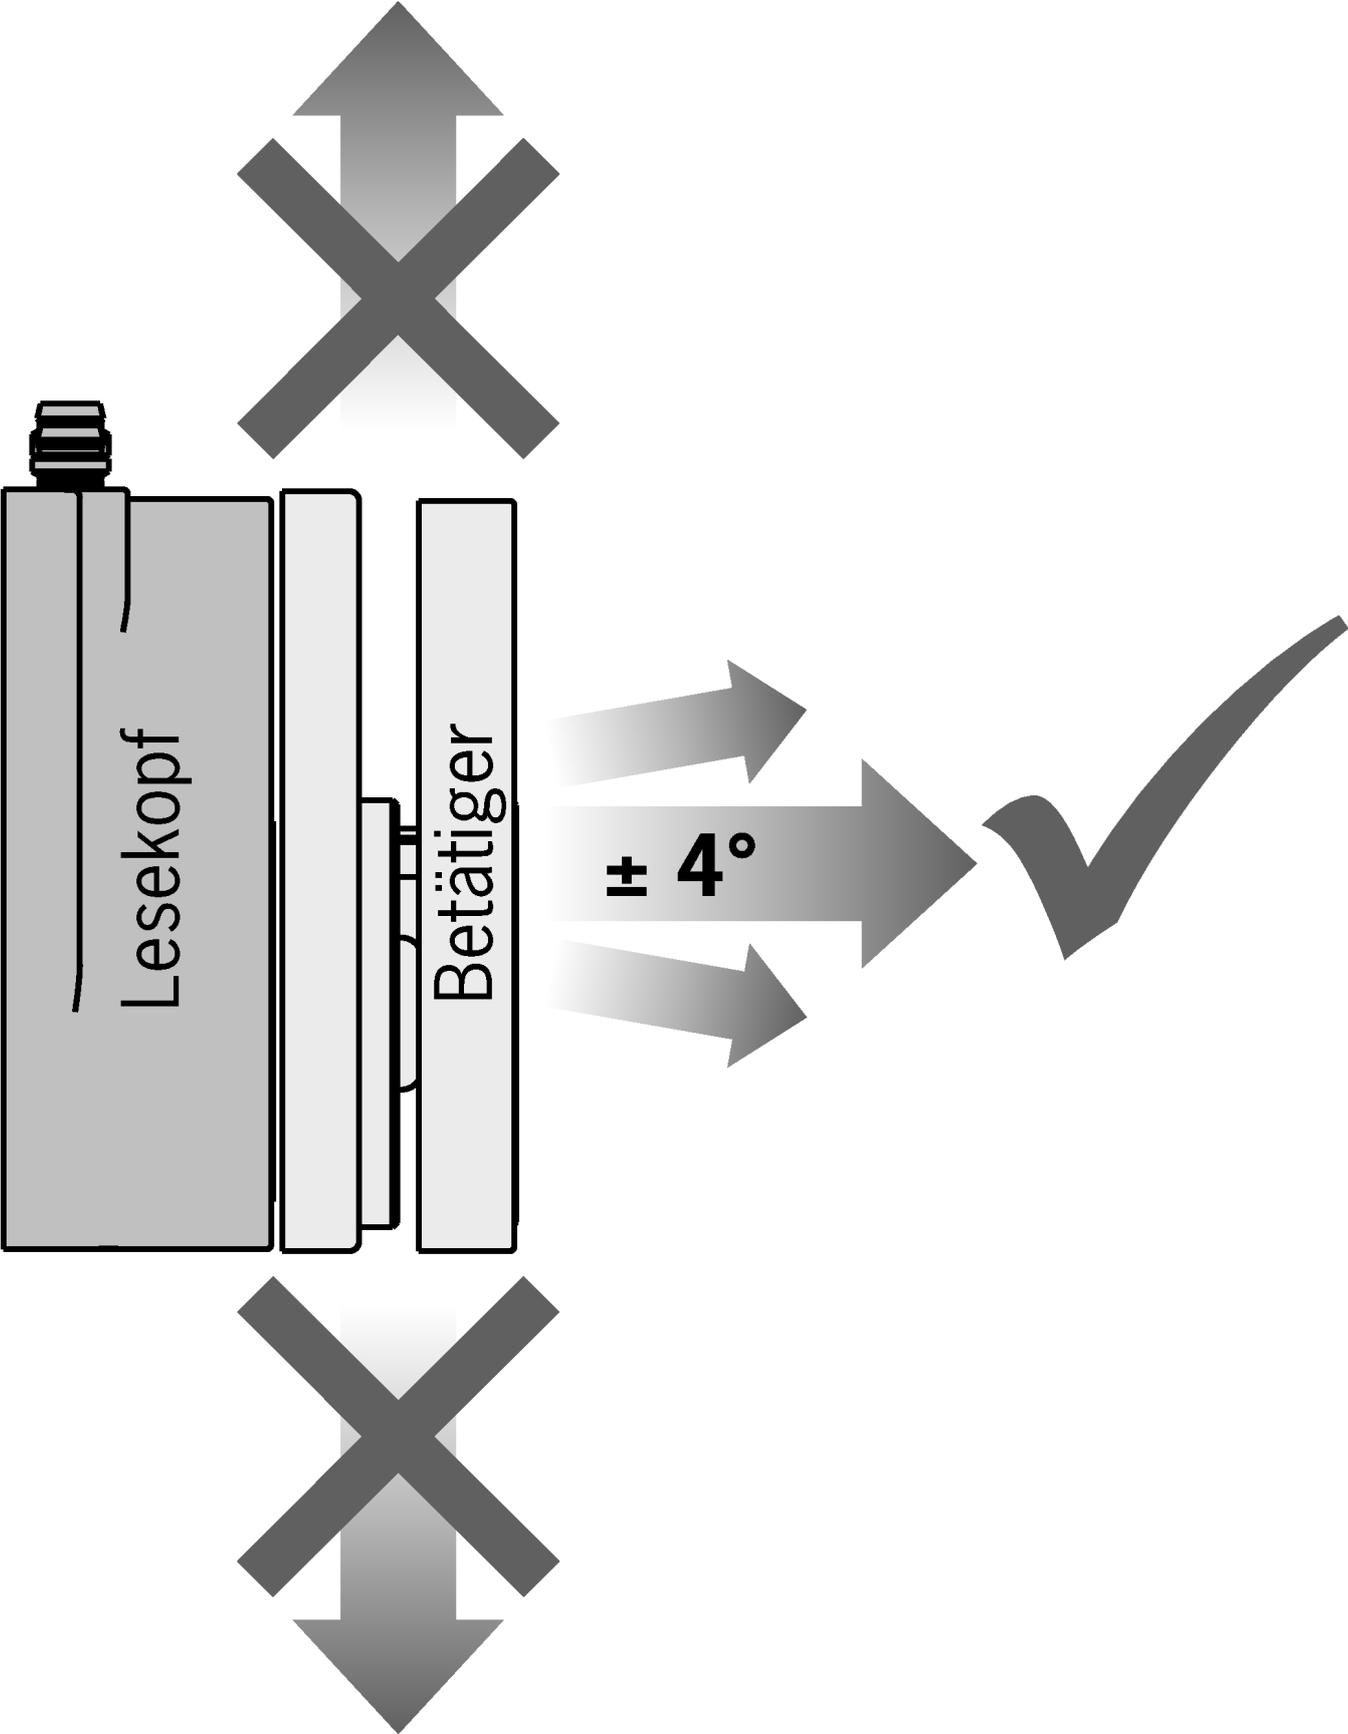

Typical operating distance

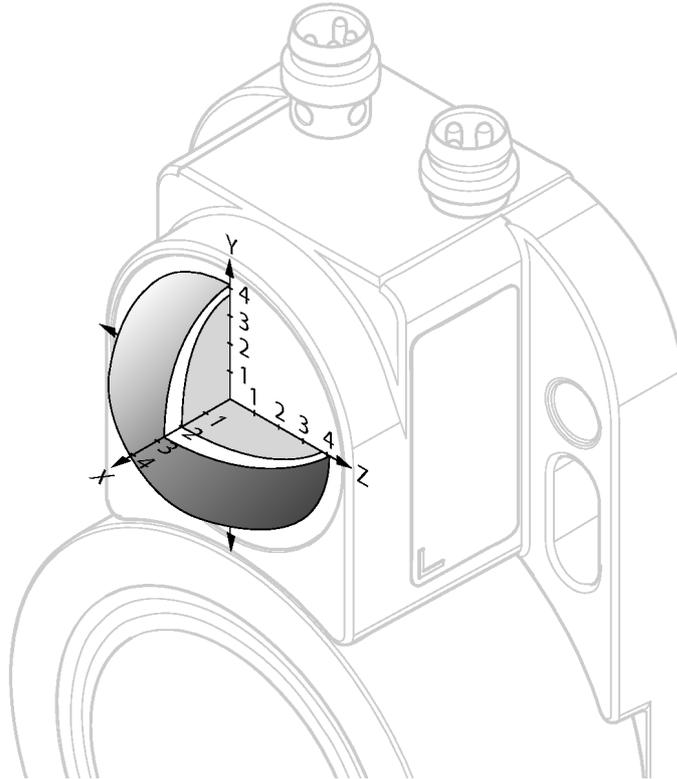

Note assured release distance $s_{ar} = 20$ mm for internal component failure. Safety outputs are safely switched off.