

CEM-A-LE05K-S2 (Order no. 094800)

Read head CEM-A-LE05... with guard locking without guard lock monitoring with remanence


- ▶ Read head with guard locking without guard lock monitoring
- ▶ Locking force 650 N
- ▶ With remanence
- ▶ Up to category 4 according to EN ISO 13849-1
- ▶ Two safety screws M5x16 included




Combination options

Suitable for connection to a CES-AZ evaluation unit

Approach direction

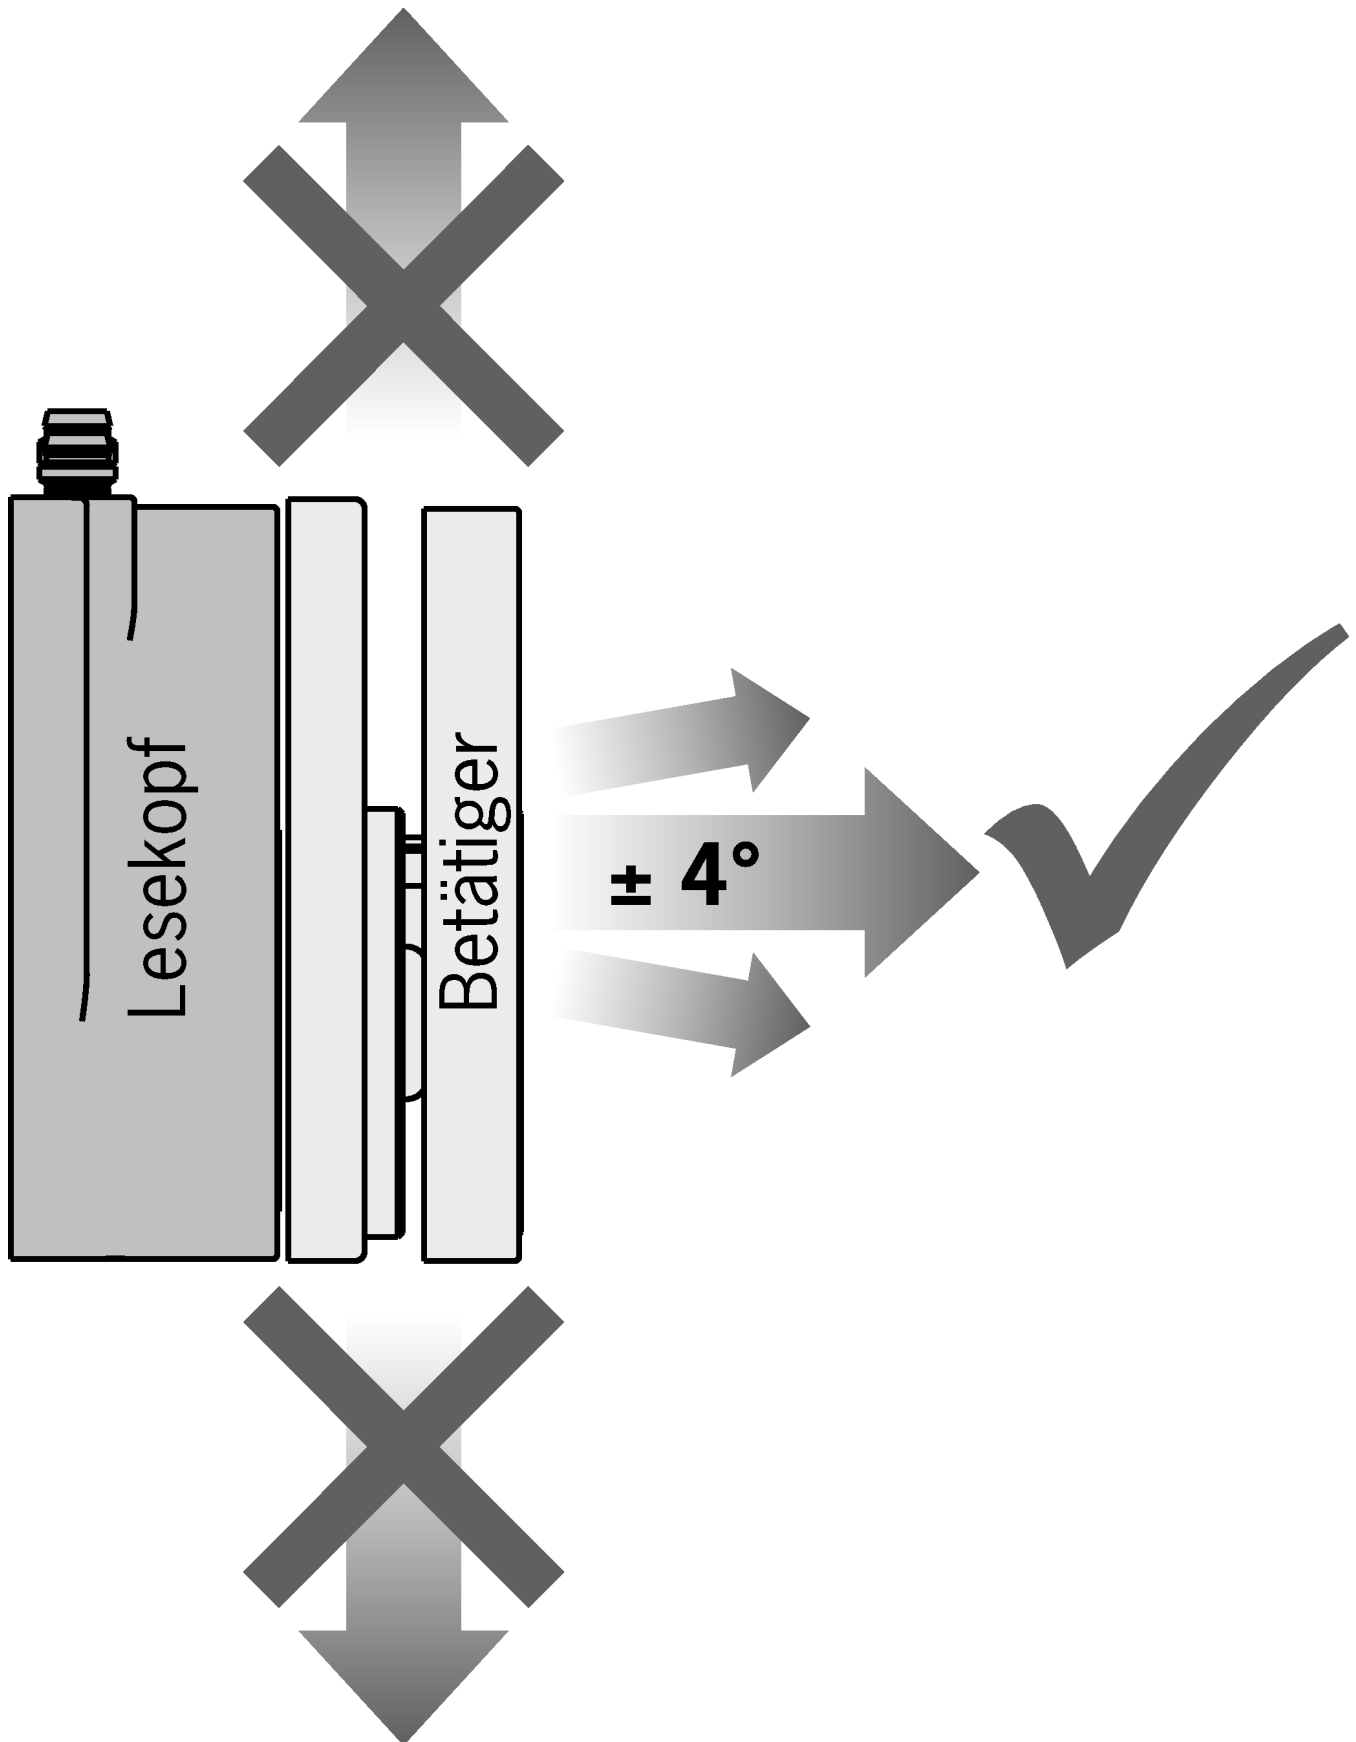

Typical operating distance

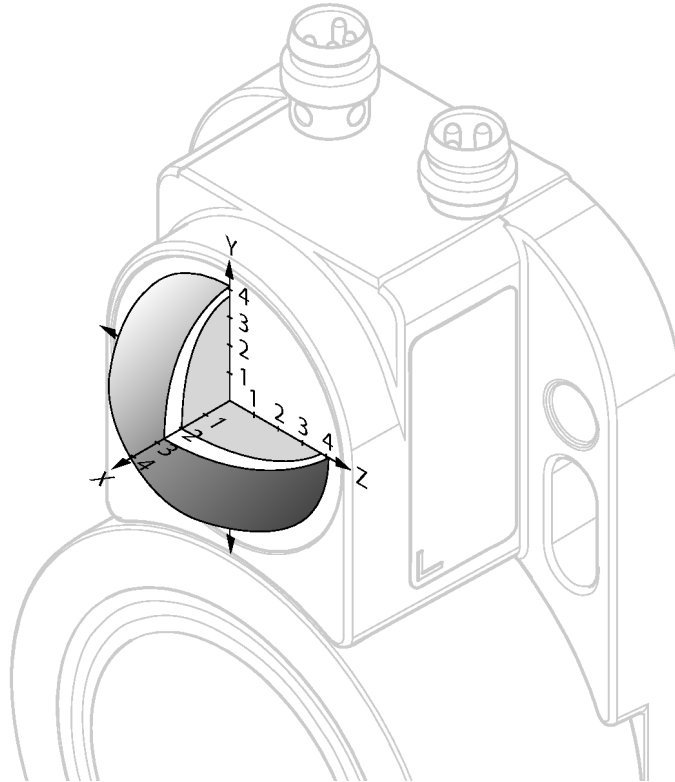

Note assured release distance $s_{ar} = 20 \text{ mm}$ for internal component failure. Safety outputs are safely switched off.