

NZ1RK-528L060GE-MC1912 (Order no. 086408)

Safety switch NZ.RK, roller plunger, steel roller \varnothing 8 mm, cable entry M20 x 1.5

- ▶ Roller plunger, steel roller \varnothing 8 mm
- ▶ With ball bearings
- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12-60 V yellow



Approach direction



Horizontal

Can be adjusted in 90° steps


LED indicator

The switch has one freely assignable LED indicator.

Switching element

528H Slow-action switching contact 1 positively driven contact \rightarrow + 1 NO contact

Dimensional drawings

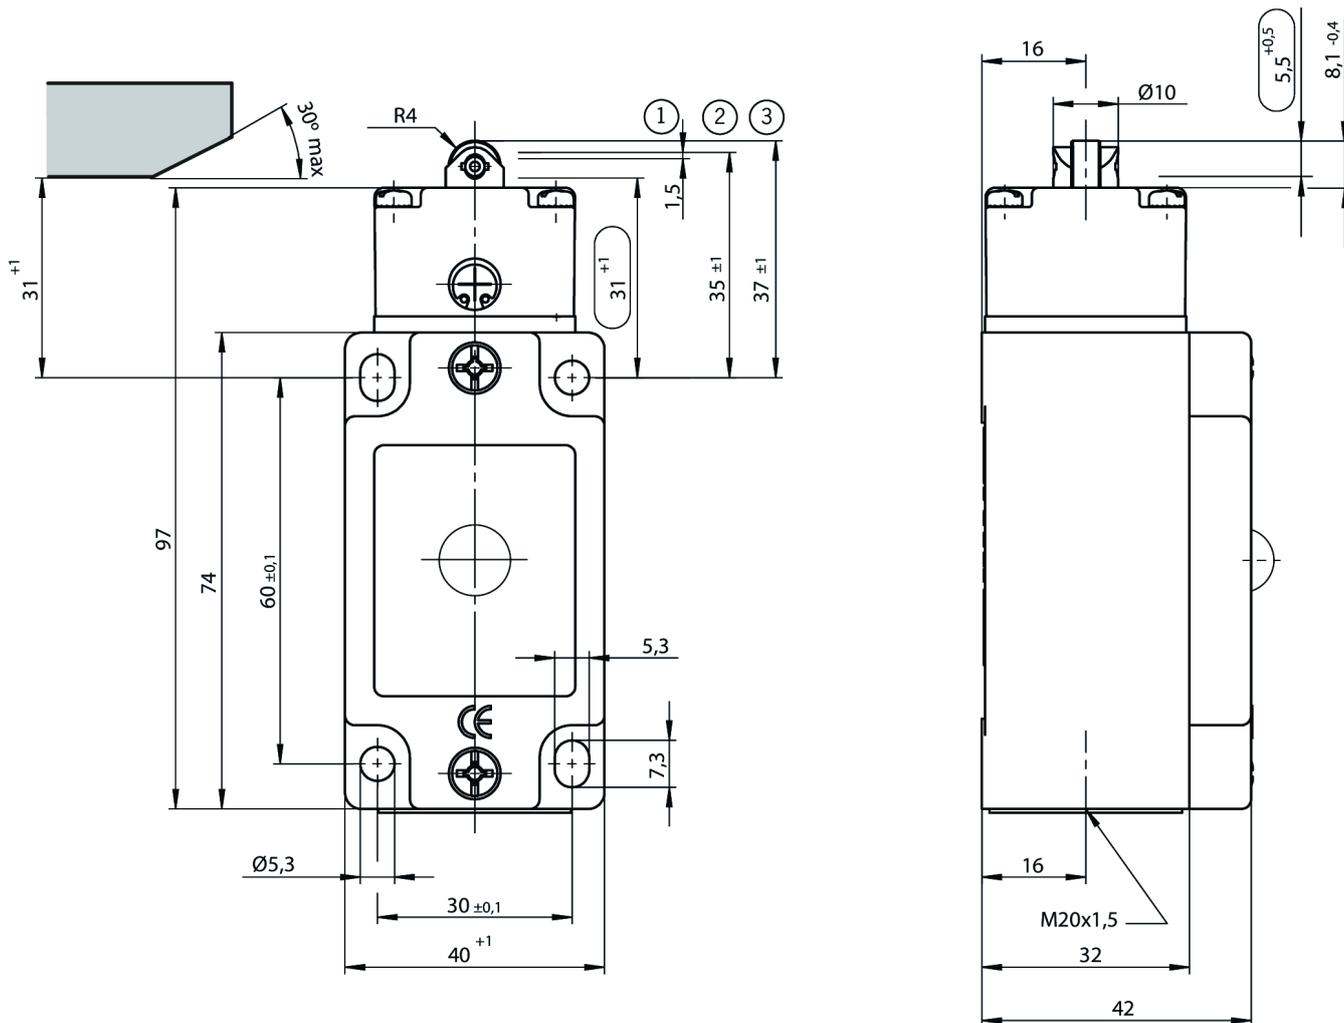

- 1 Operating point NO contact
- 2 Operating point NC contact
- 3 Free position

Connection examples

