


CES-A-BPA-098775 (Order no. 098775)

Actuator CES-A-BPA


- ▶ Cube-shaped design 40 x 40 mm



Dimensional drawings

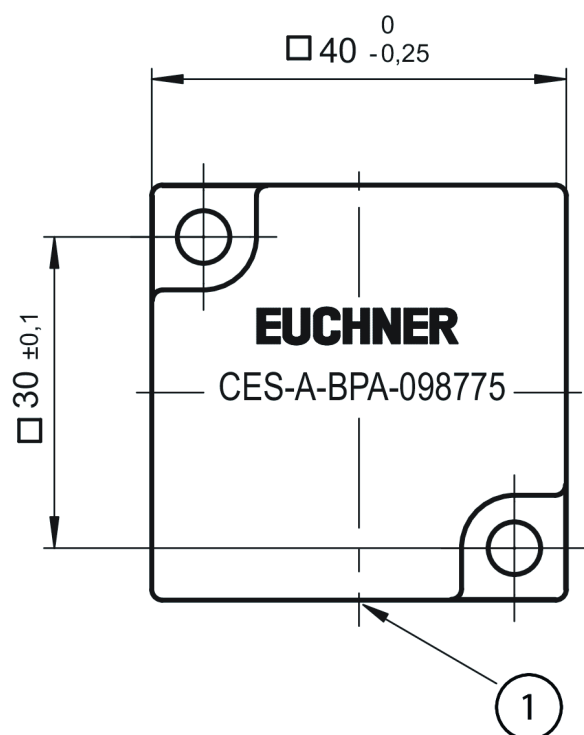

1 Active face

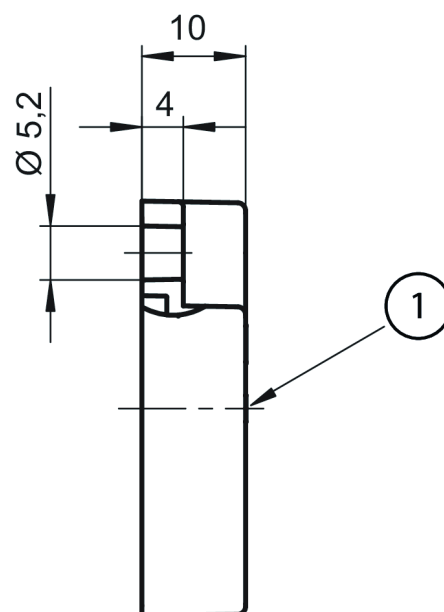

Technical data

Approvals



Workspace

Actuator distance s

Minimum distance for side approach direction min. 6 mm

Switch-on distance

with center offset $m=0$ 22 mm
(for surface mounting of the actuator on metal)

Secured switch-off distance s_{ar}

with center offset $m=0$ max. 58 mm
(for surface mounting of the actuator on metal)

Secured switching distance s_{ao}

with center offset $m=0$ min. 18 mm
(for surface mounting of the actuator on metal)

Switching hysteresis

with center offset $m=0$ 1 ... 2 mm
(for surface mounting of the actuator on metal)

Electrical connection values

Power supply Inductive via read head

Mechanical values and environment

Tightening torque

Fixing screws max. 1 Nm

Storage temperature -25 ... 70 °C

Degree of protection IP65/IP67/IP69/IP69K

Ambient temperature -25 ... 70 °C

Material

Housing Plastic (PBT)

Components included in the set

Included accessories	2x safety screws M5x10
----------------------	------------------------