


N1AB508-M (Order no. 087245)

Single limit switch N1AR, roller plunger, steel roller $\varnothing$ 8 mm, cable entry M16x1.5

- ▶ Roller plunger, steel roller $\varnothing$ 8 mm
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16x1.5
- ▶ 1 pos. driven contact
- ▶ Ball bearing

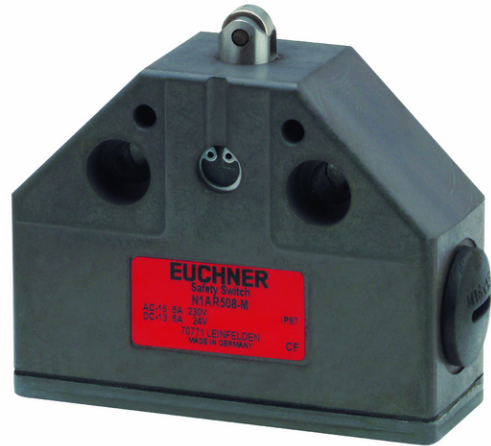

Approach direction



Horizontal

Can be adjusted in 90° steps


Ball bearing

For high approach speeds and long travel distances.

Switching element

508 Slow-action switching contact 1 positively driven contact →

Connection examples

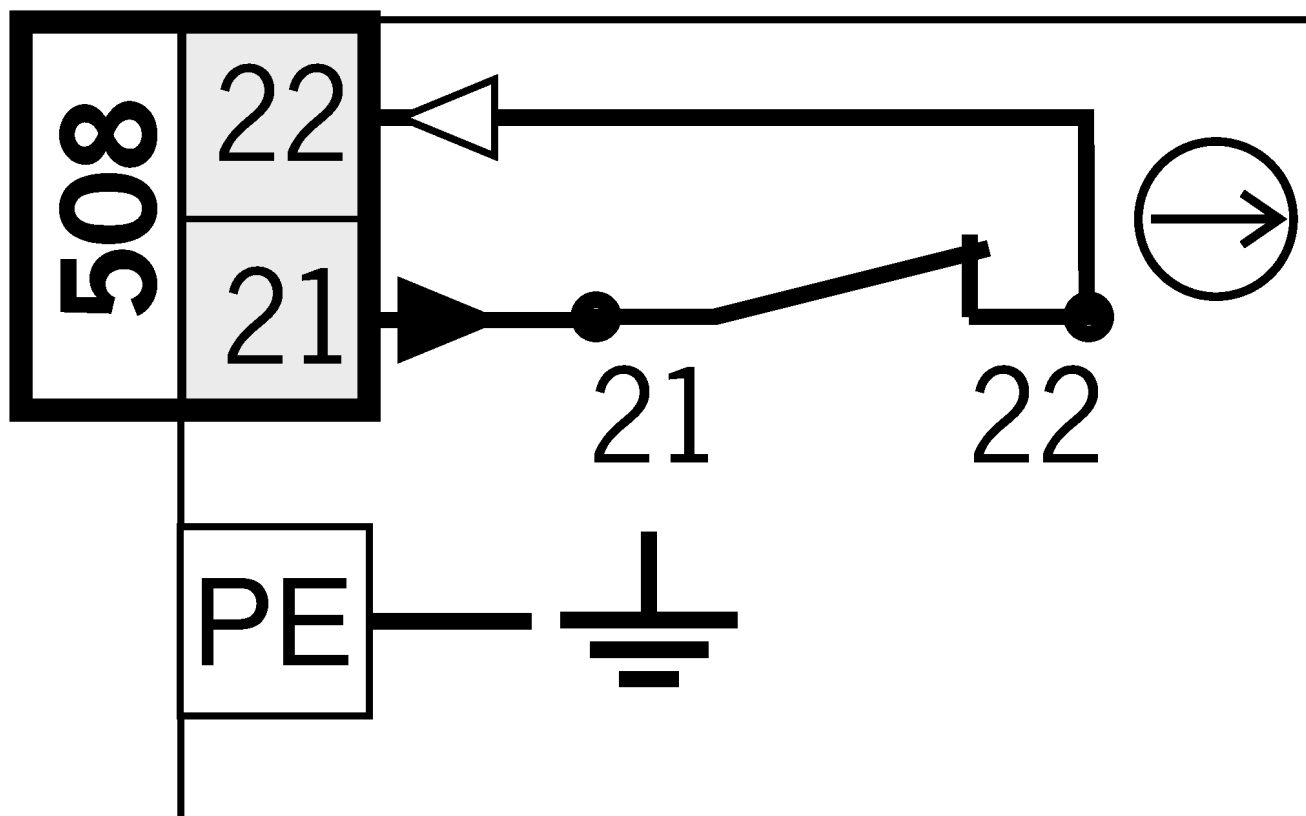

Shift travel diagrams

