


## A-C60-B1-162581 (Order no. 162581)

### Actuator A-C60-B1 for CEM-C60 with CES-C07

- ▶ In combination with guard locking solenoid CEM-C60, locking force 650 N
- ▶ With permanently installed transponder for safety switch CES-C07
- ▶ Spring-mounted anchor plate
- ▶ Holding plate surface nickel plated, high corrosion resistance



### Approach direction



Horizontal


### Actuator

The anchor plate for the CEM actuator has spring mountings and can be tilted to an angle of  $\pm 4^\circ$ . Therefore, when a misadjusted safety door is closed, the CEM actuator automatically adjusts itself to the surface of the solenoid. Subsequent adjustment of the safety door is no longer necessary. Even with a center offset of 5 mm (anchor plate in relation to solenoid) the full locking force is achieved.

## Combinations

Guard locking solenoid	Safety switch	Actuator	Application
			
			

**Dimensional drawings**

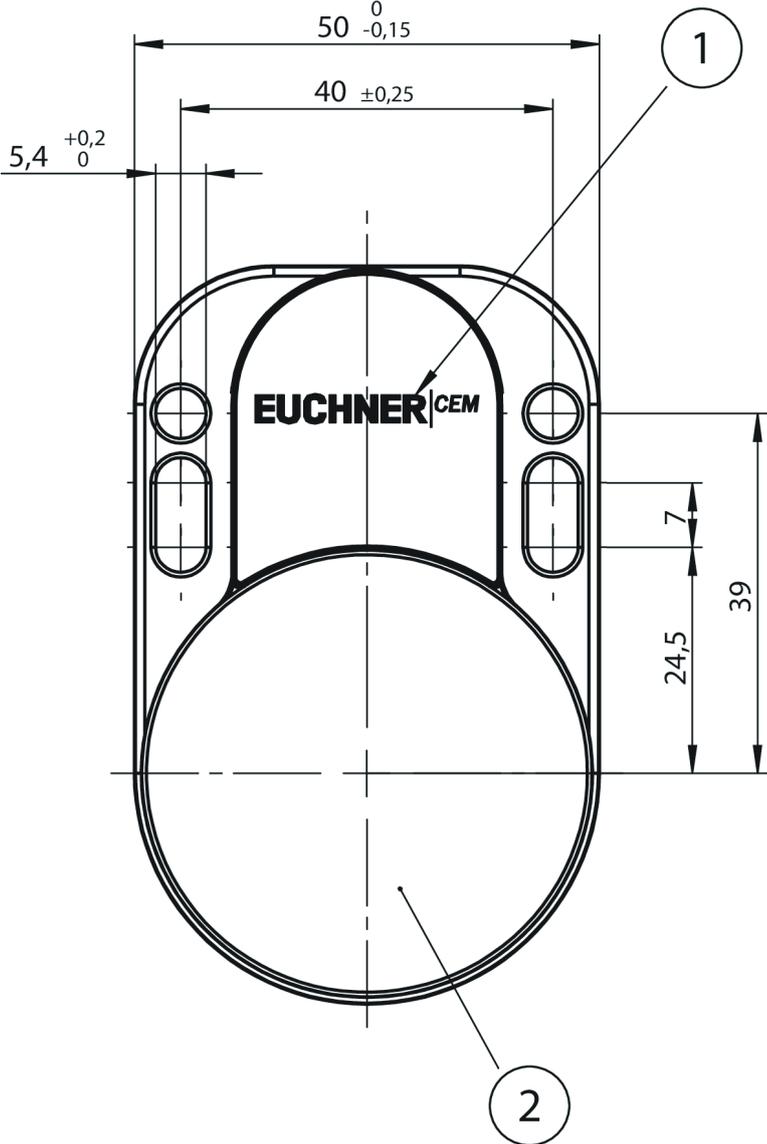

- 1 Active face: transponder
- 2 Active face: anchor plate