

NM01AL-M (Order no. 079117)

Safety switch NM.AV / NM.AL, hinged actuator as solid shaft, short housing, cable entry M16 x 1.5

- ▶ Hinged actuator as solid shaft, shaft length 110 mm
- ▶ short housing
- ▶ Cable entry M16 x 1.5
- ▶ 1 pos. driven contact




Head alignment

Actuating head can be adjusted in 90° steps.

Switching element

ES01 Slow-action switching contact 1 positively driven contact (→)

Dimensional drawings

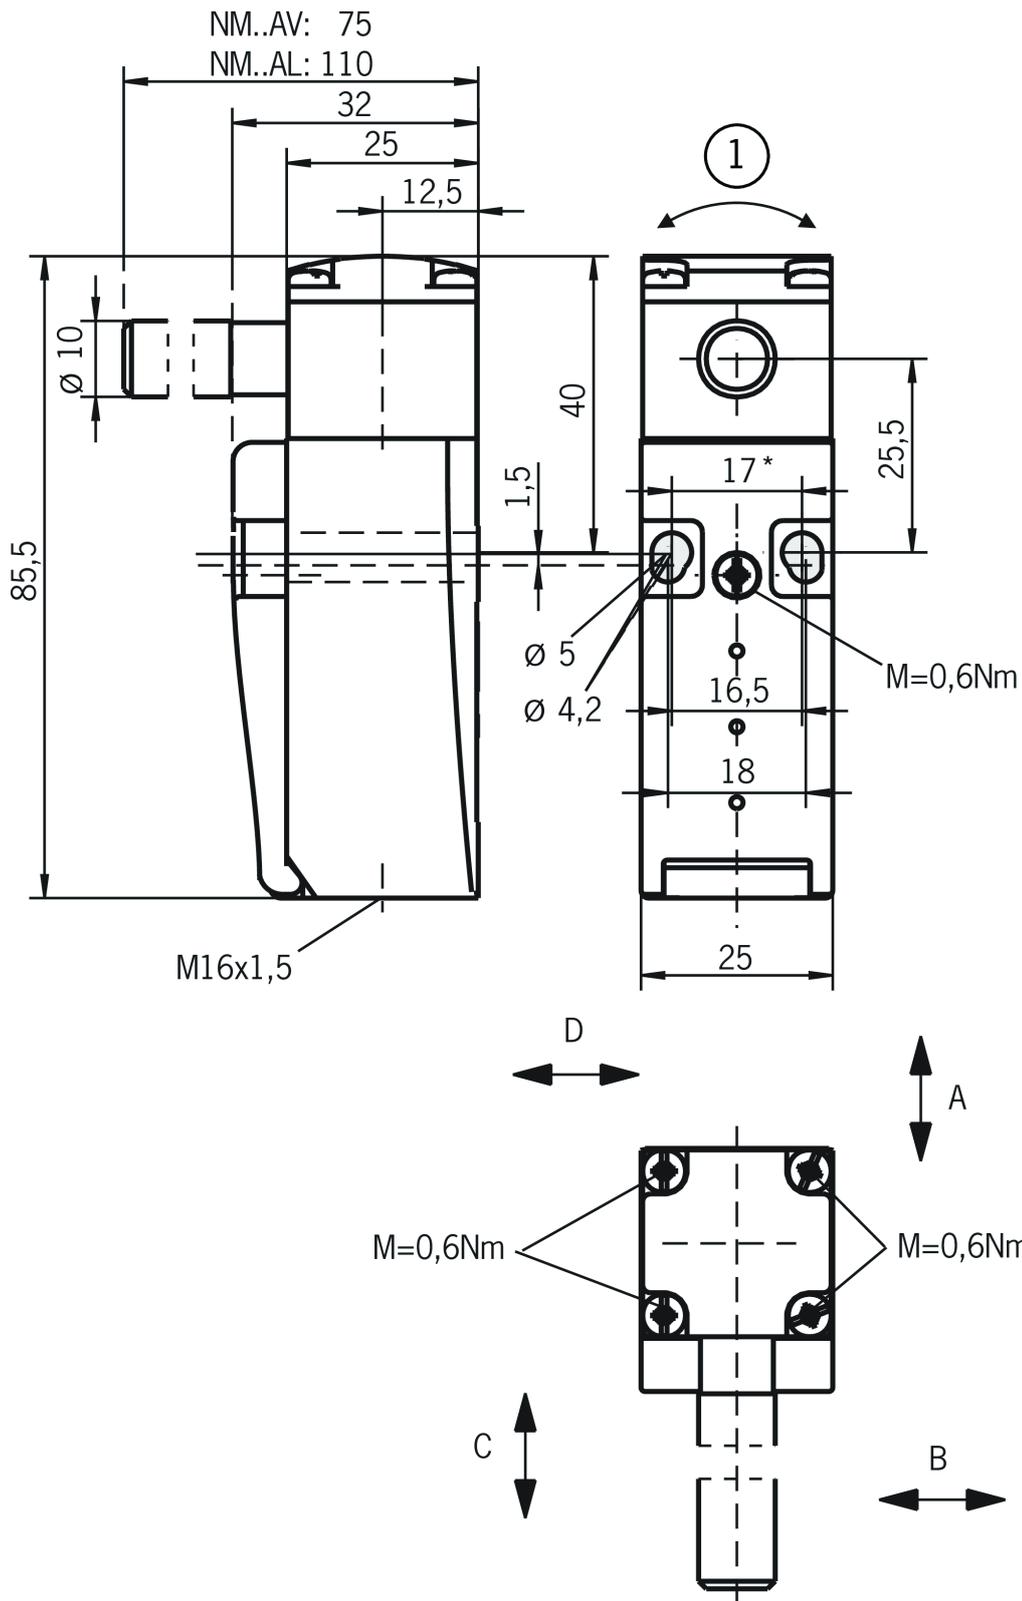

* fixed positioning for safety-related applications (M5)

1 Actuating direction

Connection examples

