

MGB2-L1HEB-PN-U-S3-AA-R-165351 (Order no. 165351)

Complete set MGB2-L1...-PN (3 pushbuttons, emergency stop, closed-circuit current principle, door hinge on right)

- ▶ Guard locking with guard lock monitoring
- ▶ Illuminated emergency stop according to ISO 13850
- ▶ 3 illuminated pushbuttons
- ▶ Version with blanking cover
- ▶ Connection via plug connector RJ45, AIDA compliant
- ▶ Integrated switch
- ▶ Adjustable door hinge; factory setting: right
- ▶ Escape release
- ▶ Unicode



Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.
L1... (closed-circuit current principle)


PROFINET connection

Plug connector RJ45 (push-pull plug according to IEC 61076-3-117, variant 14)

PROFINET switch

Linear topology network structure due to integrated switch (supports MRP).

Dimensional drawings

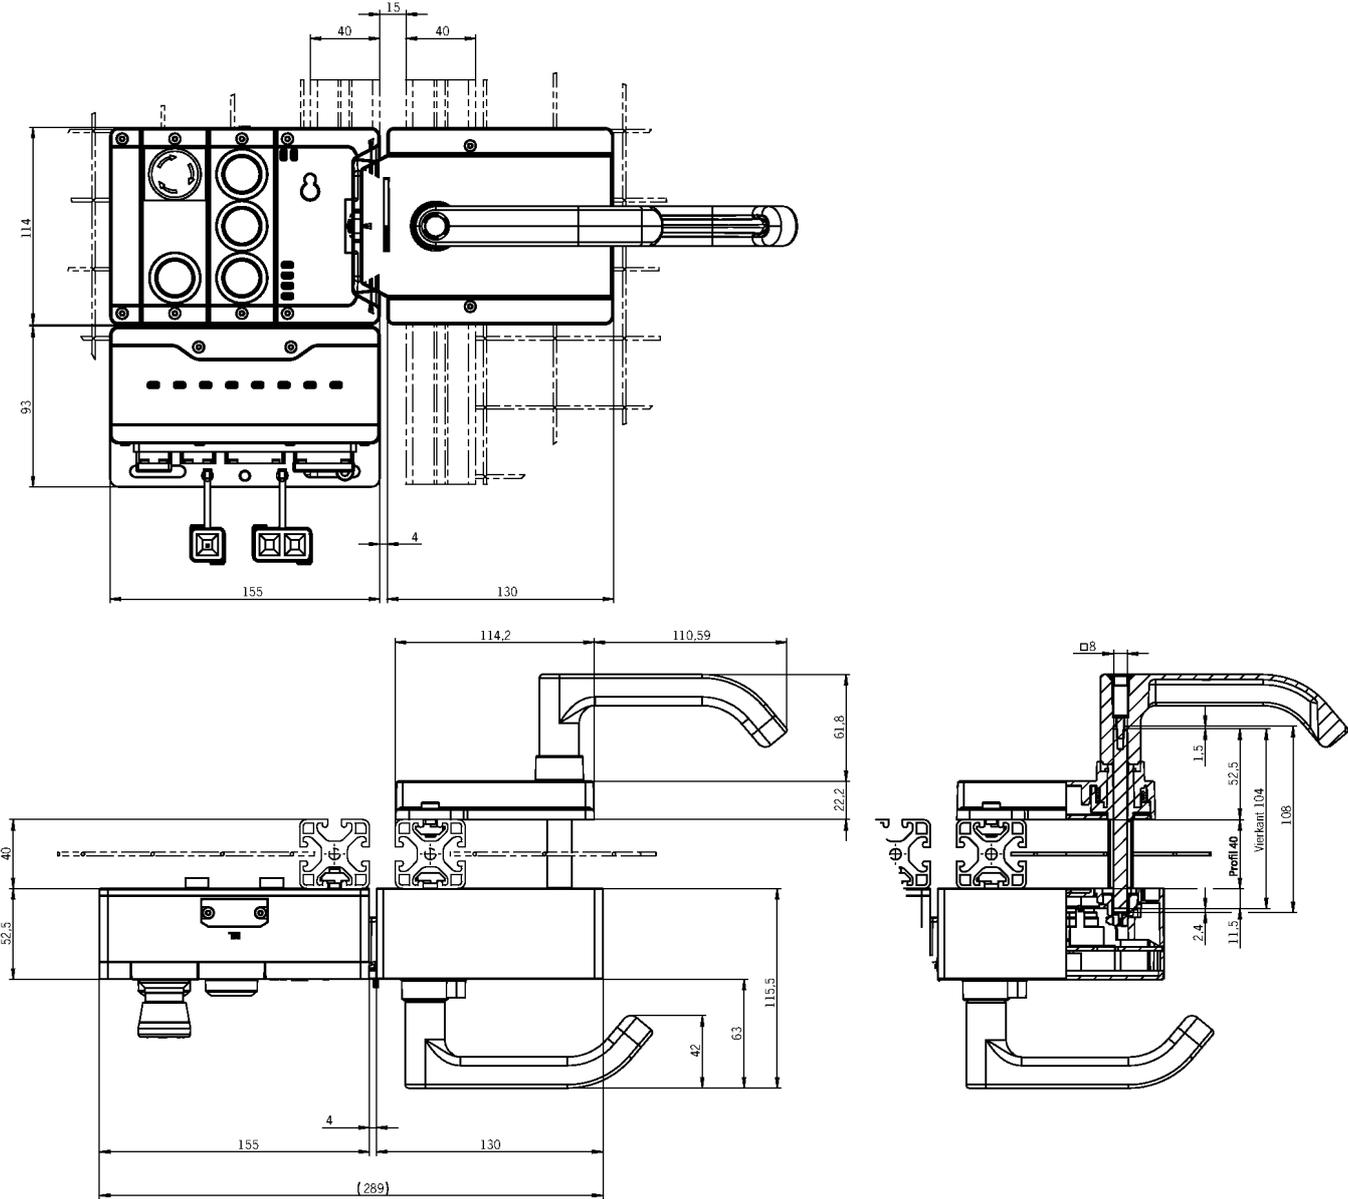

Dimensional drawings

