


## A-C-H-G-LS-122677 (Order no. 122677)

### Actuator for bolt for safety switch CTP/CTA


- ▶ Version suitable for bolt
- ▶ Straight actuator
- ▶ Two safety screws included

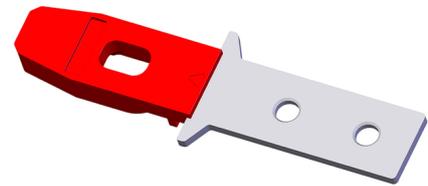

### Straight actuator

The straight actuator is used for bolts. Safety screws prevent unscrewing of the actuators. The safety screws included can be inserted with a normal tool, but cannot be removed again.





### Dimensional drawings

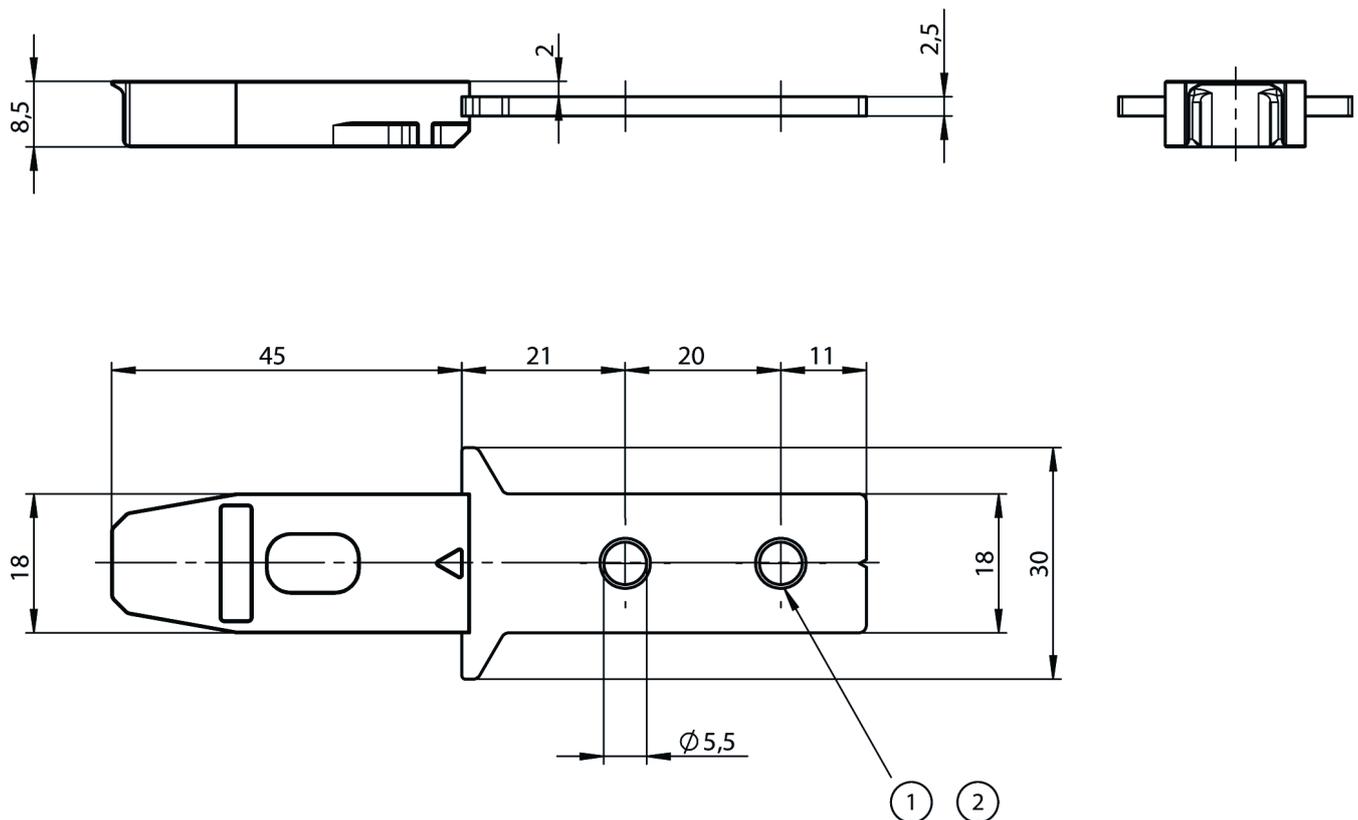

1 2x non-removable screws M5 included

2 Actuator must not be used for guiding or as an end stop. Safety switch and actuator must be placed together for mounting on the machine.

Dimensional drawings

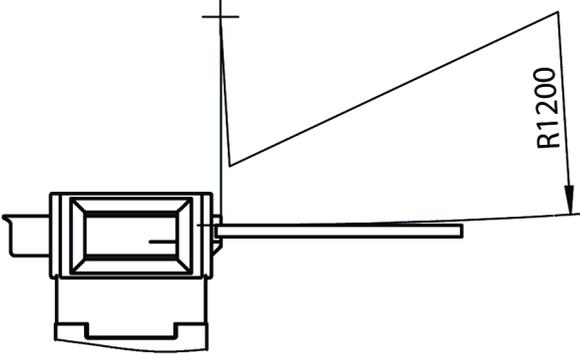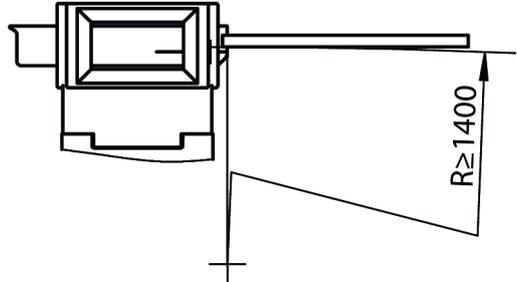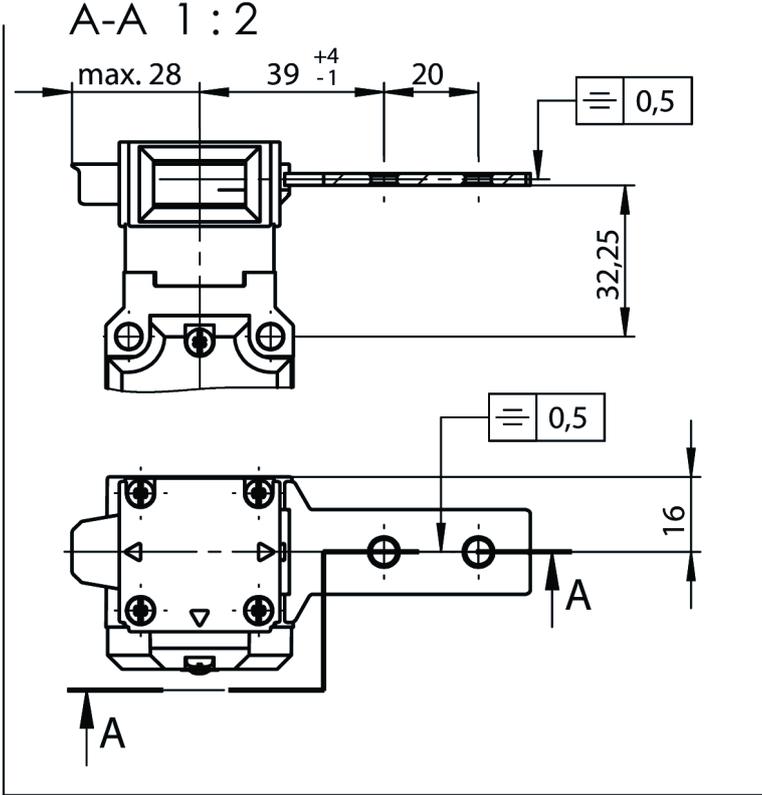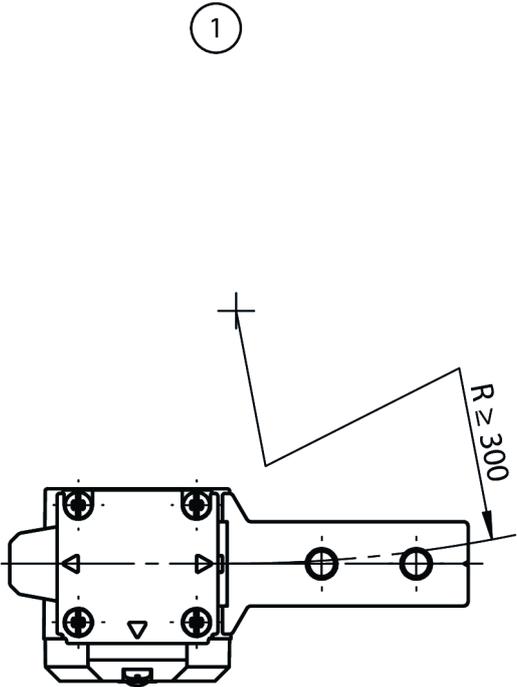

1 minimum door radii

## Technical data

### Approvals



### Electrical connection values

Power supply	Inductive via read head
--------------	-------------------------

### Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Mechanical life	1 x 10 <sup>6</sup>
-----------------	---------------------

Overtravel	5 mm
------------	------

Degree of protection	IP67/IP69
----------------------	-----------

Ambient temperature	-20 ... 55 °C
---------------------	---------------

#### Material

Mounting	Stainless steel
----------	-----------------

Encapsulation	fiber reinforced plastic, red
---------------	-------------------------------

Locking force $F_{max}$	3900 N
-------------------------	--------

Locking force $F_{Zh}$	3000 N
	( $F_{Zh}=F_{max}/1.3$ )