

## A-C-H-W-SST-122668 (Order no. 122668)

### Bent actuator for safety switch CTP/CTA

- ▶ Bent actuator, bottom
- ▶ Two safety screws included




### Bent actuator, bottom




The angled actuator is used on sliding doors or hinged doors with door radii greater than 300 mm. Safety screws prevent unscrewing of the actuators.

The safety screws included can be inserted with a normal tool, but cannot be removed again.

### Dimensional drawings

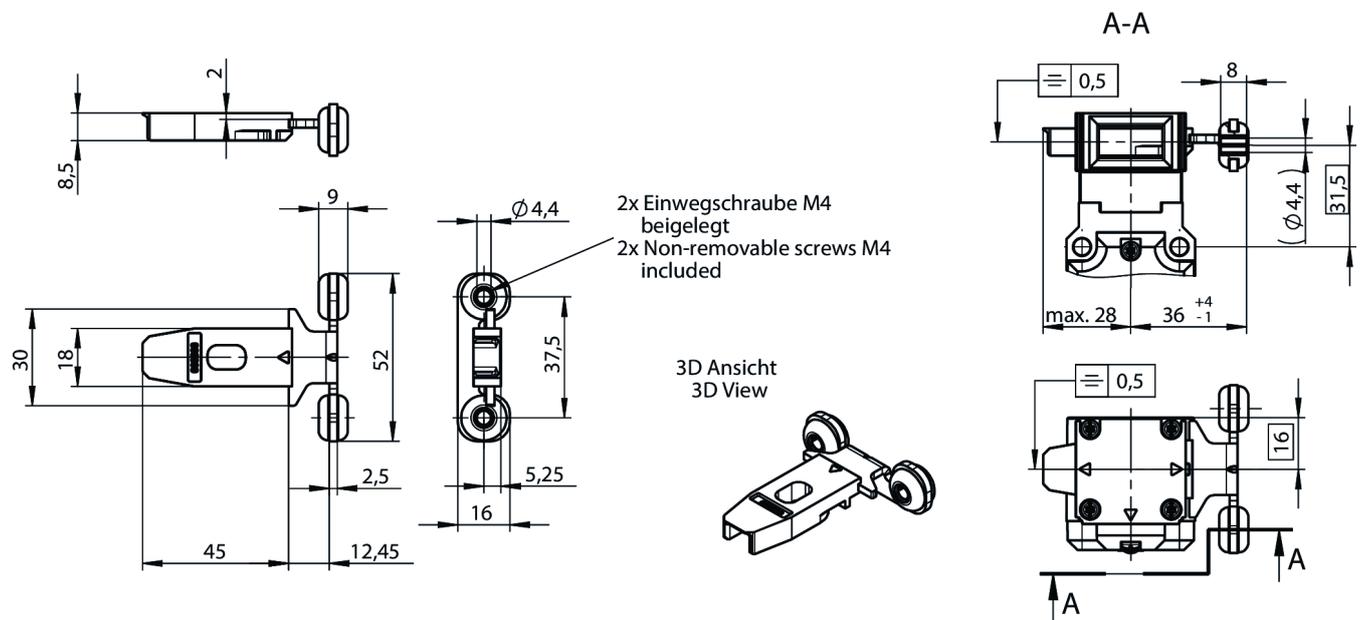

Dimensional drawings

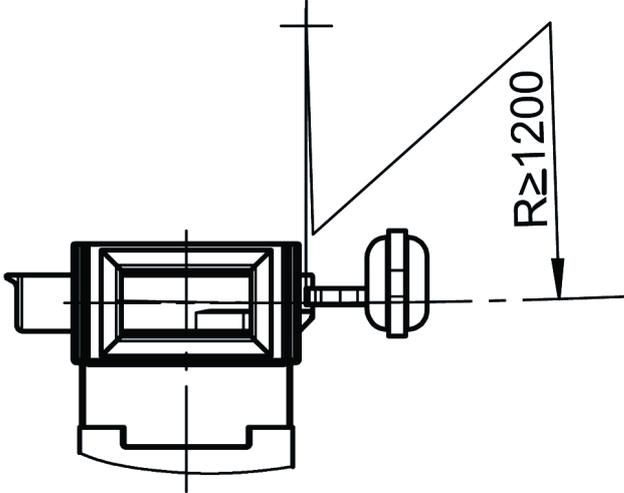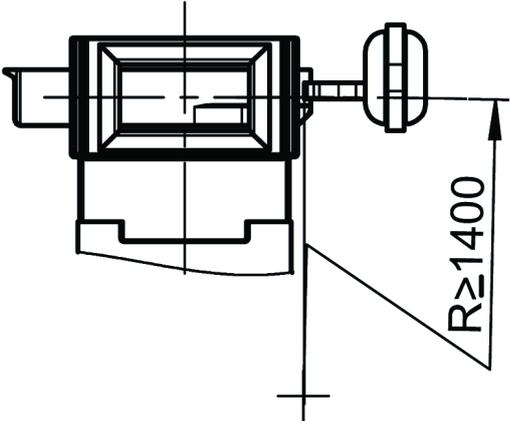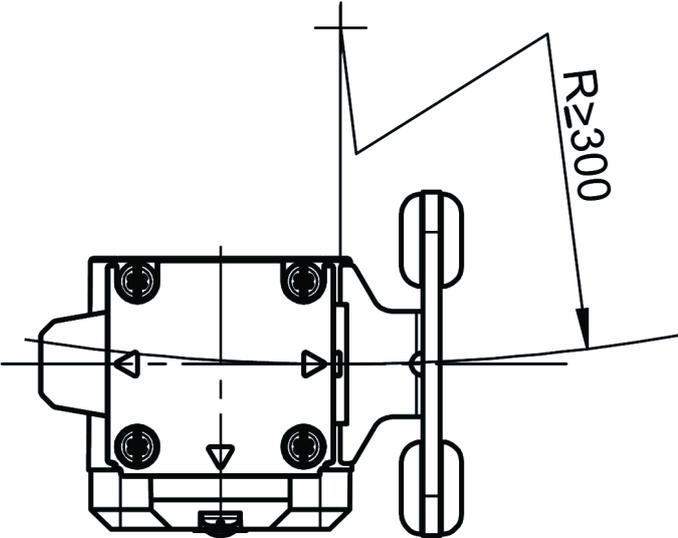

## Technical data

### Approvals



### Electrical connection values

Power supply	Inductive via read head
--------------	-------------------------

### Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Mechanical life	1 x 10 <sup>6</sup>
-----------------	---------------------

Overtravel	5 mm
------------	------

Degree of protection	IP67/IP69
----------------------	-----------

Ambient temperature	-20 ... 55 °C
---------------------	---------------

#### Material

Bush	NBR
------	-----

Mounting	Stainless steel
----------	-----------------

Encapsulation	Fiber reinforced plastic, black
---------------	---------------------------------

Locking force $F_{max}$	1500 N
-------------------------	--------

Locking force $F_{Zh}$	1100 N
	( $F_{Zh} = F_{max}/1.3$ )