

MGB2-L1-MLI-U-YB1A1-DA-R-156374 (Order no. 156374)

Locking module MGB2-L1-MLI... (2 pushbuttons, emergency stop, closed-circuit current principle, door hinge on right)

- ▶ Guard locking for the protection of persons or processes
- ▶ Locking module MGB2 for connection to a bus module MBM
- ▶ Interlocking with monitored guard locking
- ▶ Category 4/PL e for the evaluation of all safety functions
- ▶ 1 illuminated emergency stop according to ISO 13850
- ▶ 2 illuminated pushbuttons
- ▶ 3 cut-outs for slide-in labels
- ▶ Adjustable door hinge; factory setting: right
- ▶ Unicode
- ▶ Compatible with all Modular devices



Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.
 L1... (closed-circuit current principle)

Door hinge

On the locking modules, the door stop can be changed from right to left and vice versa at any time with little effort.


Lens set

The color of the pushbuttons can be selected using the lens set 120344 included (5 colors).

Slide-in labels

The user can produce custom labeling using the enclosed slide-in labels. (3 pcs., blank)

Dimensional drawings

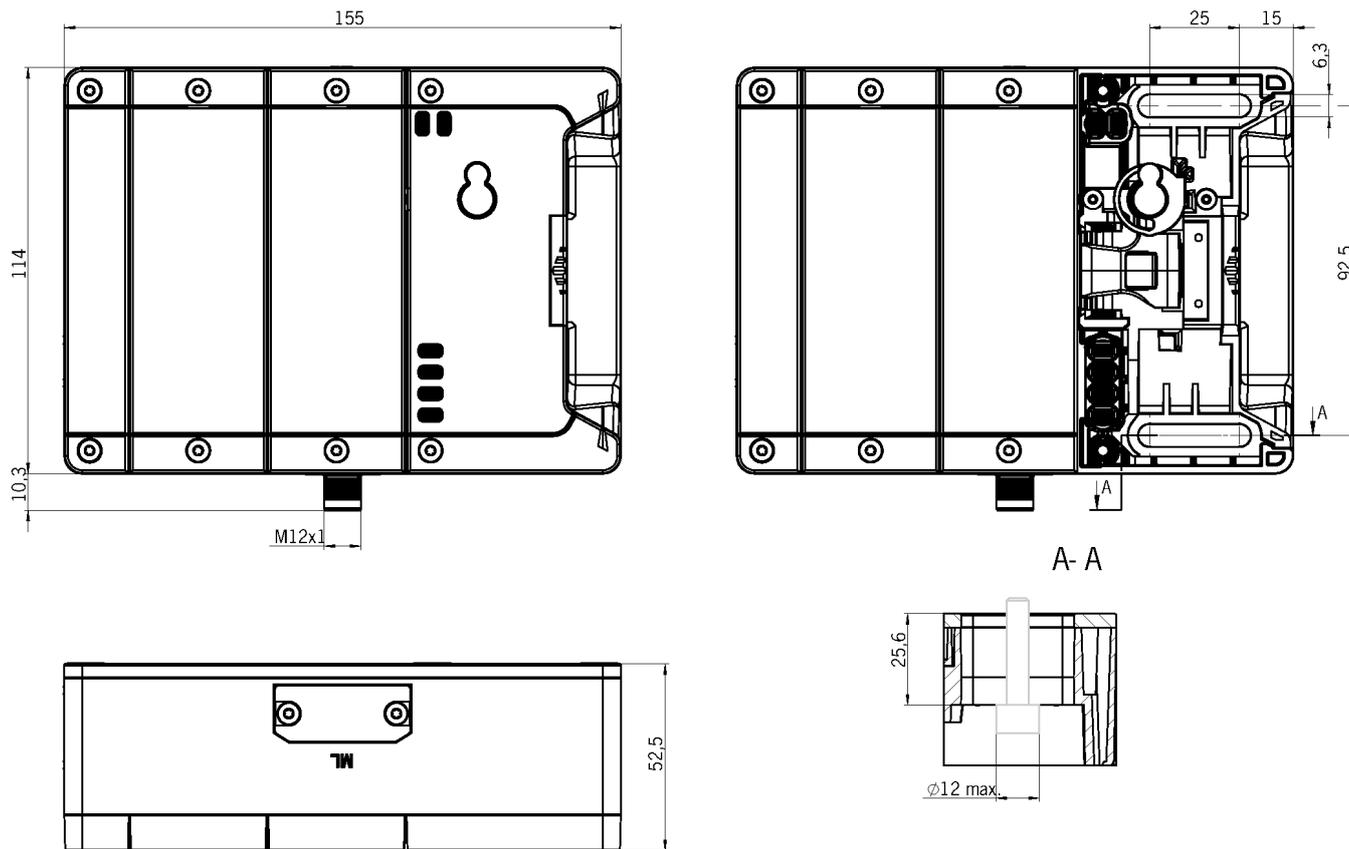

Dimensional drawings

