


## MGB-L1HE-ARA-L-121193 (Order no. 121193)

### Locking set MGB-L1HE-ARA... (guard locking by spring force) with 2 pushbuttons, emergency stop, incl. label carrier, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ incl. adhesive labels
- ▶ With plug connector RC18
- ▶ With escape release
- ▶ Unicode
- ▶ Only numbered connecting cables may be used.

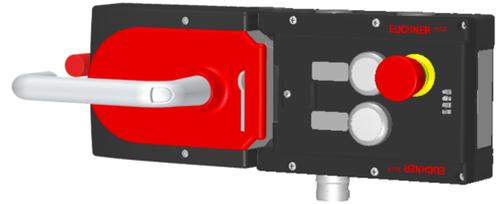

#### Guard locking type

MGB- L1... The locking arm is held in the locked position by spring force and is unlocked by solenoid force (closed-circuit current principle, mechanically locked).

#### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

#### LED indicator

The LED indicator indicates all important system and status information.

#### Monitoring outputs

OT Bolt tongue inserted into the evaluation module

OL Guard locking solenoid in locked position

OI Diagnostics; there is a fault

#### Emergency stop device

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated

#### Pushbuttons

S2 1 NO contact, illuminated

S3 1 NO contact, illuminated

#### Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

## **Adhesive labels**

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

## **Escape release**

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.

## **Notice**

Only numbered connecting cables may be used for this MGB set. (See Accessories)