


MGB-L2-ARA-AP2A1-M-R-121397 (Order no. 121397)

Locking module MGB-L2-ARA... (guard locking by solenoid force) with 2 pushbuttons, 1 indicator, emergency stop

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ 1 indicator (illuminated, ye)
- ▶ Selector switch (form V, 90°)
- ▶ With cable entry
- ▶ Unicode

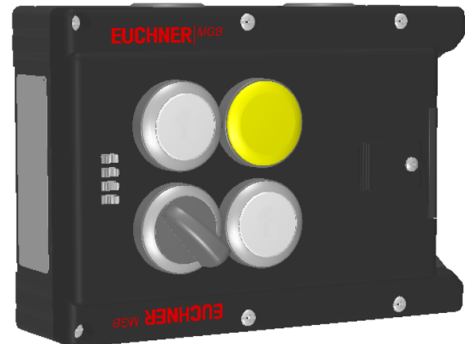

Guard locking type

MGB- L2... The locking arm is held in the locked position by solenoid force and is unlocked by spring force when the solenoid is switched off (open-circuit current principle, electrically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Pushbuttons

- S1 1 NO contact, illuminated
- S3 1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Indicators

- H2 LED, yellow

Selector switch

S4 Selector switch with 2 positions (form V, 90°). The switch latches in both positions