


NZ1VZ-528EL060-M (Order no. 090566)

Safety switch NZ.VZ, cable entry M20 x 1.5

- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator



Approach direction



Horizontal

Can be adjusted in 90° steps

LED indicator

The switch has one freely assignable LED indicator.



Switching element

528H Slow-action switching contact 1 positively driven contact $\rightarrow$ + 1 NO contact



Accessories required

Actuator is not included.


Functional drawings

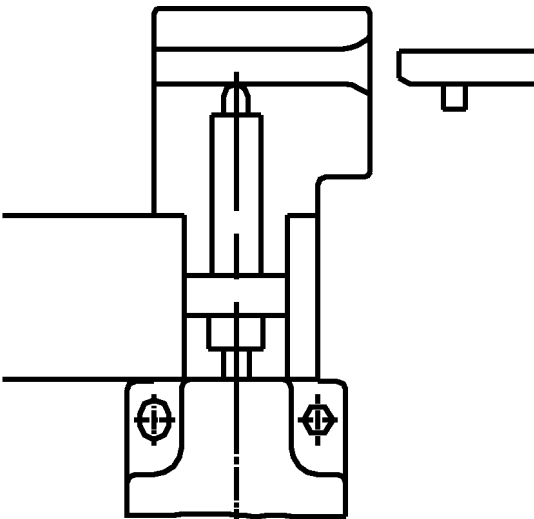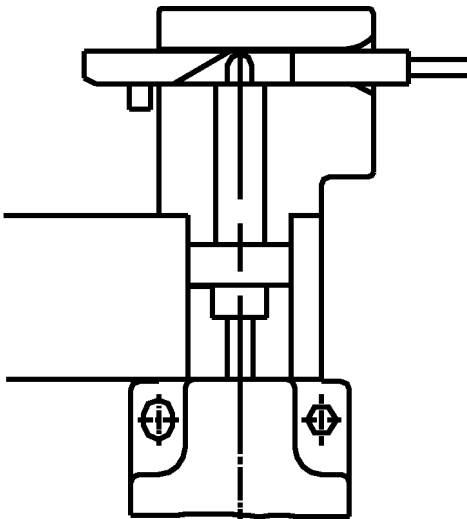

511
528

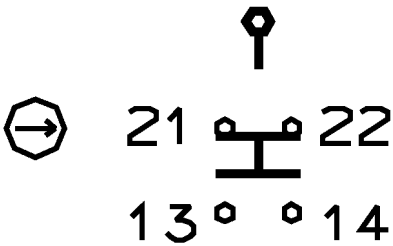

Dimensional drawings

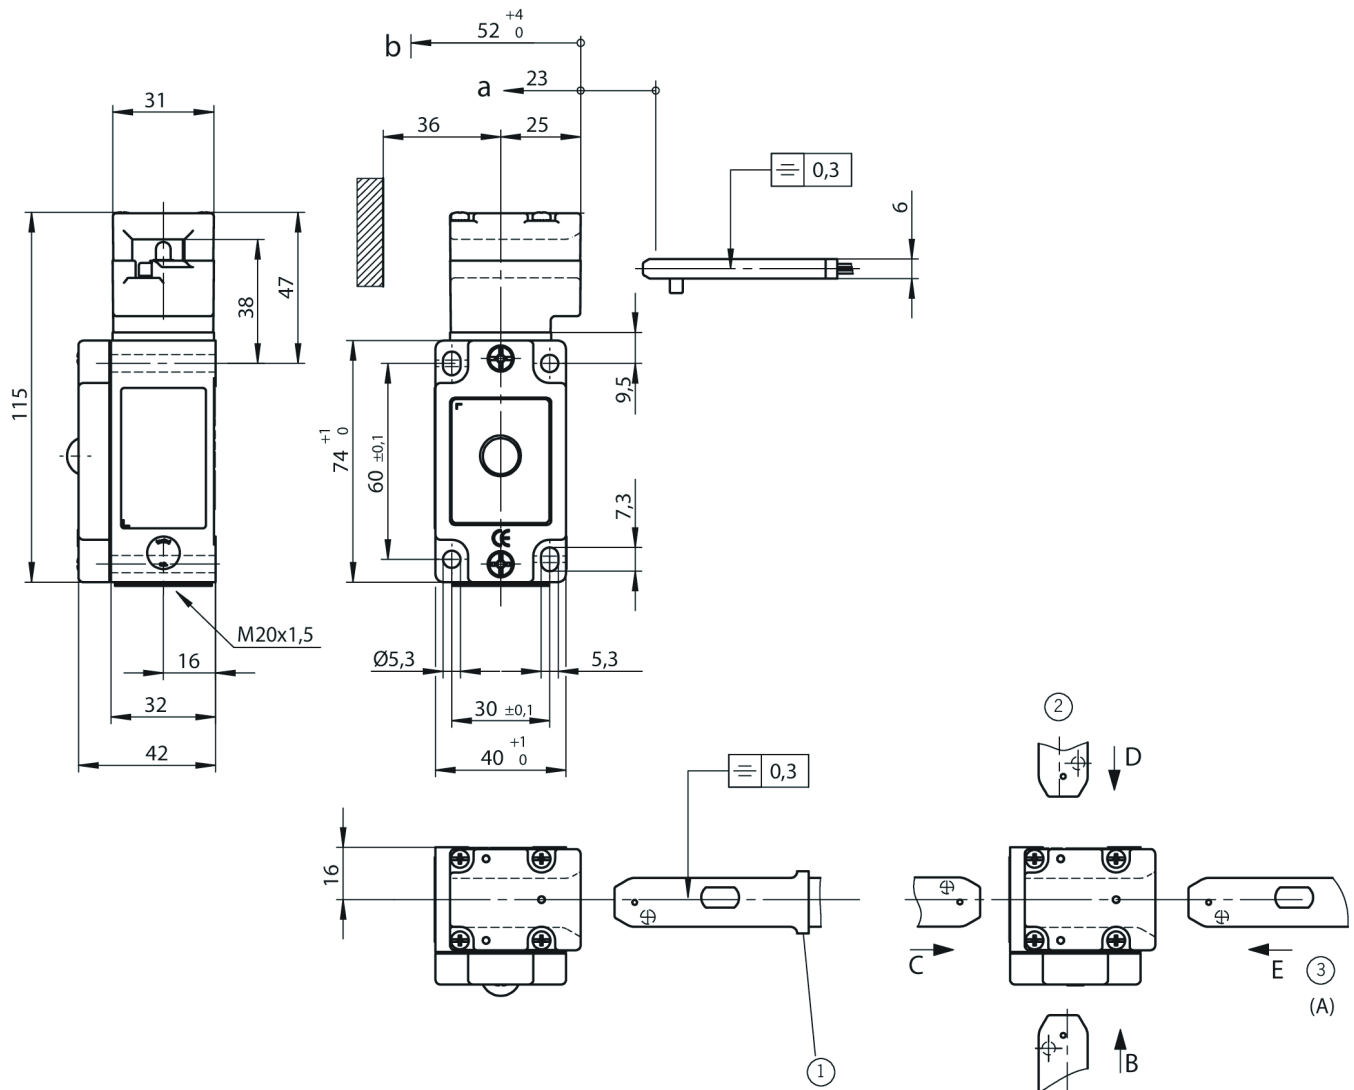

1 Do not use as an end stop. Limit overtravel separately.

2 Actuating direction can be changed

3 Standard

a Travel without operation: actuator is in the guide slot, but function is not triggered.

b Switching operation completed: actuator must be inserted to this point to ensure safe switching. The actuator must be withdrawn at least to point a for switching off.