

NZ2RS-511L060 (Order no. 090147)

Safety switch NZ.RS, roller plunger, steel roller \varnothing 12 mm, plug connector M26 (SR6)

- ▶ Roller plunger, steel roller \varnothing 12 mm
- ▶ Version C according to EN 50041
- ▶ Plug connector M26 (SR6), 6-pin + PE
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12-60 V red



Approach direction



Horizontal

Can be adjusted in 90° steps


LED indicator

The switch has one freely assignable LED indicator.

Switching element

511 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

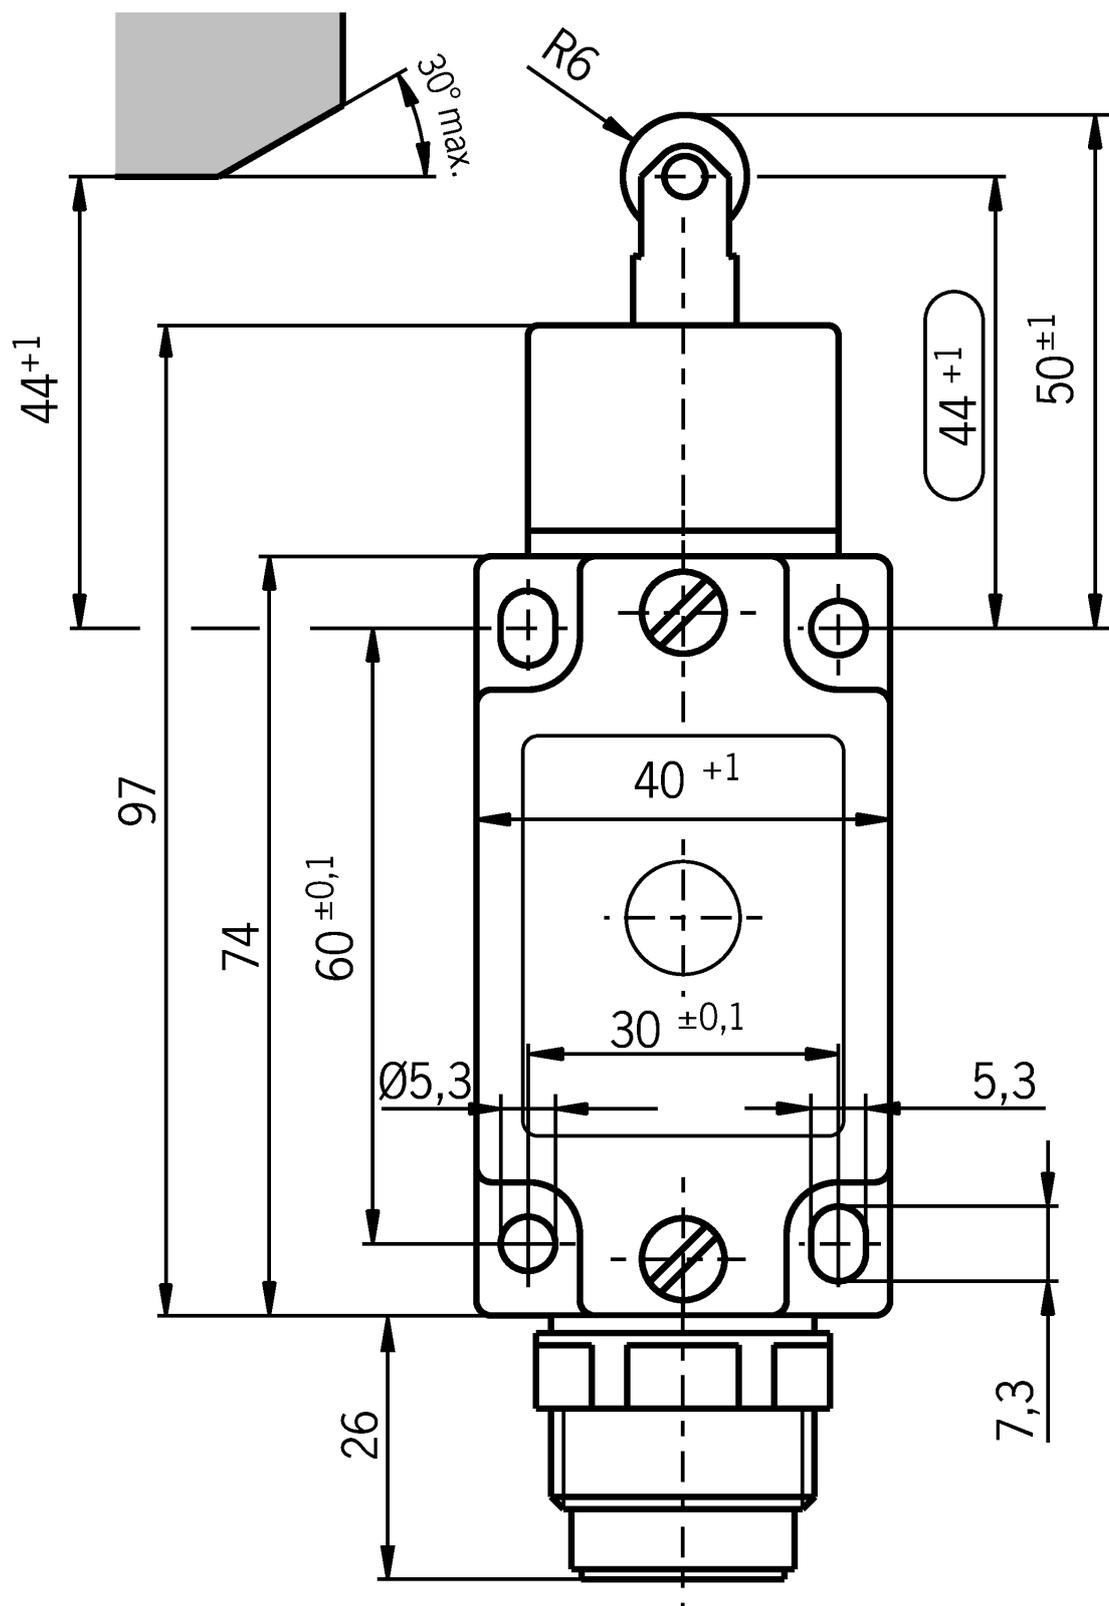

Connection examples

