

AE-L-CET-156429 (Order no. 156429)

Lockout bar for CET actuator


- ▶ Prevents unintentional closing of the door
- ▶ Can be secured with padlocks



The lockout bar can be used to prevent maintenance personnel from being unintentionally locked in the danger zone, for example. The lockout bar is mounted on the CET actuator (CET-A-BWK-50X-096327) when the guard is open, and it can be secured with up to 3 padlocks.

Dimensional drawings

Sperreinsatz für CET - Betätiger 096327 /
Lockout device for CET actuator 096327

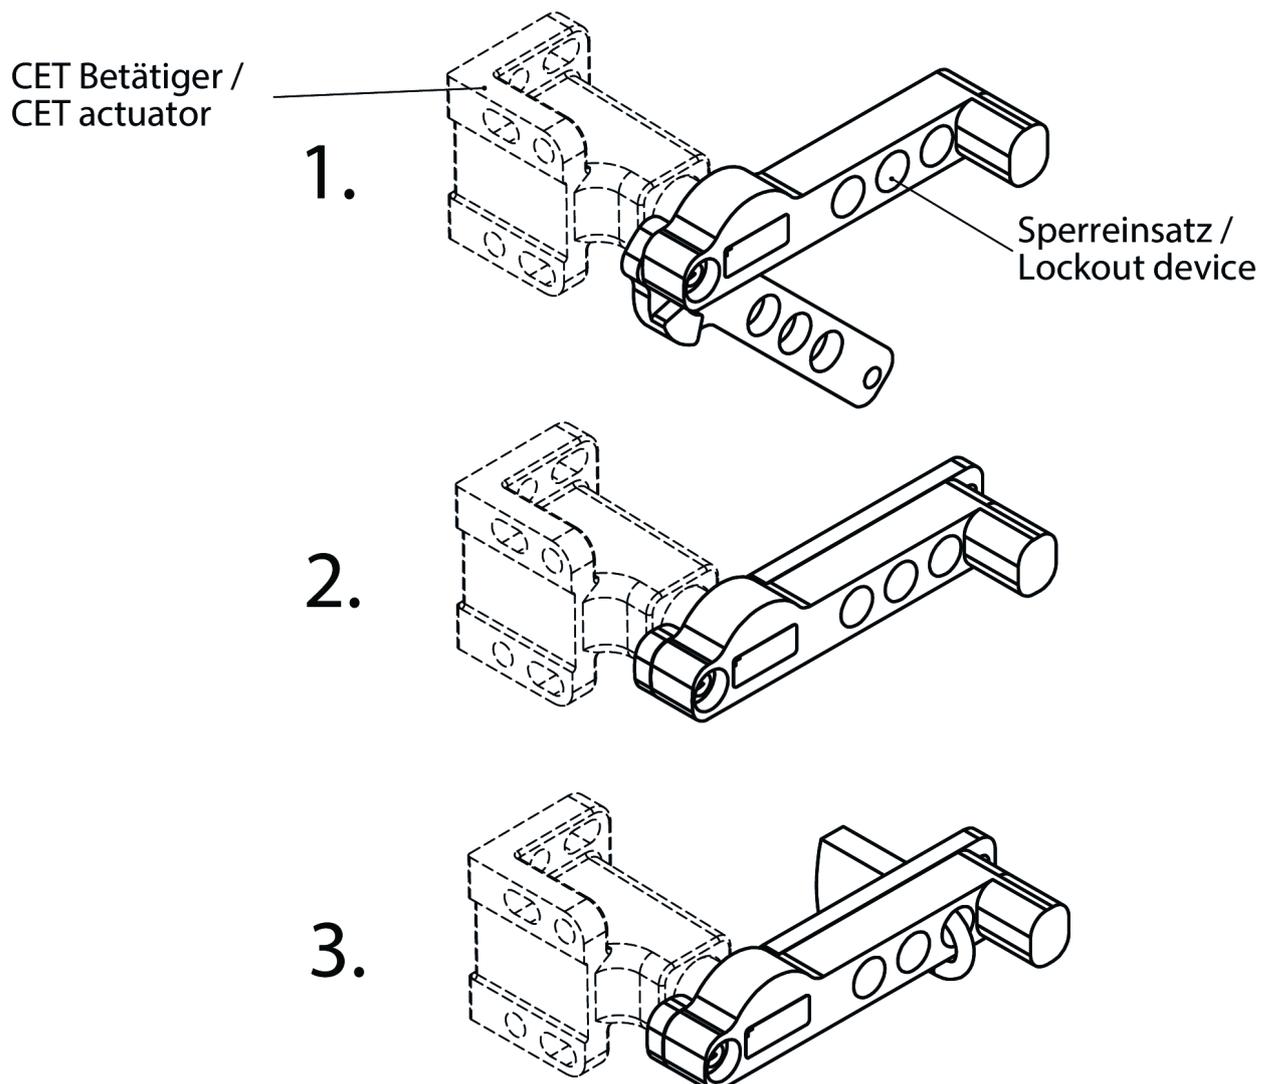

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
Material	Aluminum

Miscellaneous

Additional information	
	3 padlocks can be attached
Shackle diameter	5 mm – 9 mm