




Innovation & Quality

www.votatec.ca

Filament Candle

5.5W

Project :
Type :
Drawn by :
Catalogue No. :
Date :

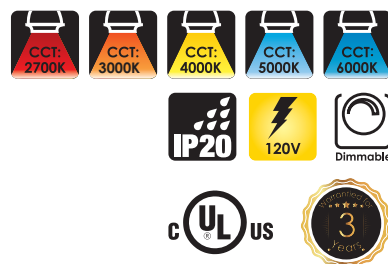

VO-FCAW5.5-120



VO-FCAW5.5-120-30-F-D



VO-FCA-WH-W5.5-120
(White Filament)

Specifications

Model No.		VO-FCAW5.5-120	VO-FCAW5.5-120-30-F-D	VO-FCA-WH-W5.5-120
General	CCT	☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K	3000K	☐ 3000K ☐ 4000K ☐ 5000K
	Watts	5.5W	5.5W	5.5W
	Lumen	600Lm	600Lm	600Lm
	Base	E12(Anti-shock)	E12(Anti-shock)	E12(Anti-shock)
	Volts	120V	120V	120V
	CRI	>80	>80	>80
	Beam Angle	360°	360°	360°
	Hours Rated	15,000 Hrs	15,000 Hrs	15,000 Hrs
	Product Size	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)
Electrical	IP Grade	IP20	IP20	IP20
	Power Factor	>0.7	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	Glass	Glass	Glass
	Bulb Head Color	Clear	Clear	Clear
	Weight (g)	16 (±2g)	14 (±2g)	14 (±2g)
Additional Information	Additional Info	Dimmable	Dimmable	Dimmable
	Warranty	3Years	3Years	3Years
Compliance	Certification	cUL	cUL	cUL



Features & Specifications

Performance Data


- Available color temperature in 2700K/3000K/4000K/5000K/6000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection (standard)
- -20°C~+40°C (the best in 25°C)

Compliances


- cUL
- IP20

Dimensions & Weights


Model	VO-FCAW5.5-120	VO-FCAW5.5-120-30-F-D	VO-FCA-WH-W5.5-120
Diameter in. (mm)	1.38(35)	1.38(35)	1.38(35)
Height in. (mm)	3.92(99.5)	3.92(99.5)	3.92(99.5)
Net weight (g)	16(±2g)	14(±2g)	14(±2g)

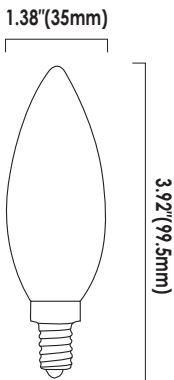

VO-FCAW5.5-120

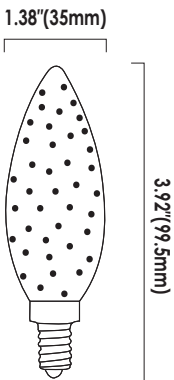

VO-FCAW5.5-120-30-F-D

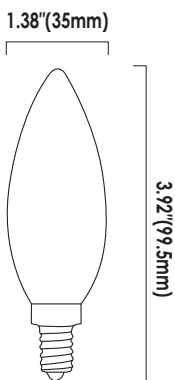

VO-FCA-WH-W5.5-120




Innovation & Quality

www.votatec.ca

Filament Candle

5.5W

Product Details

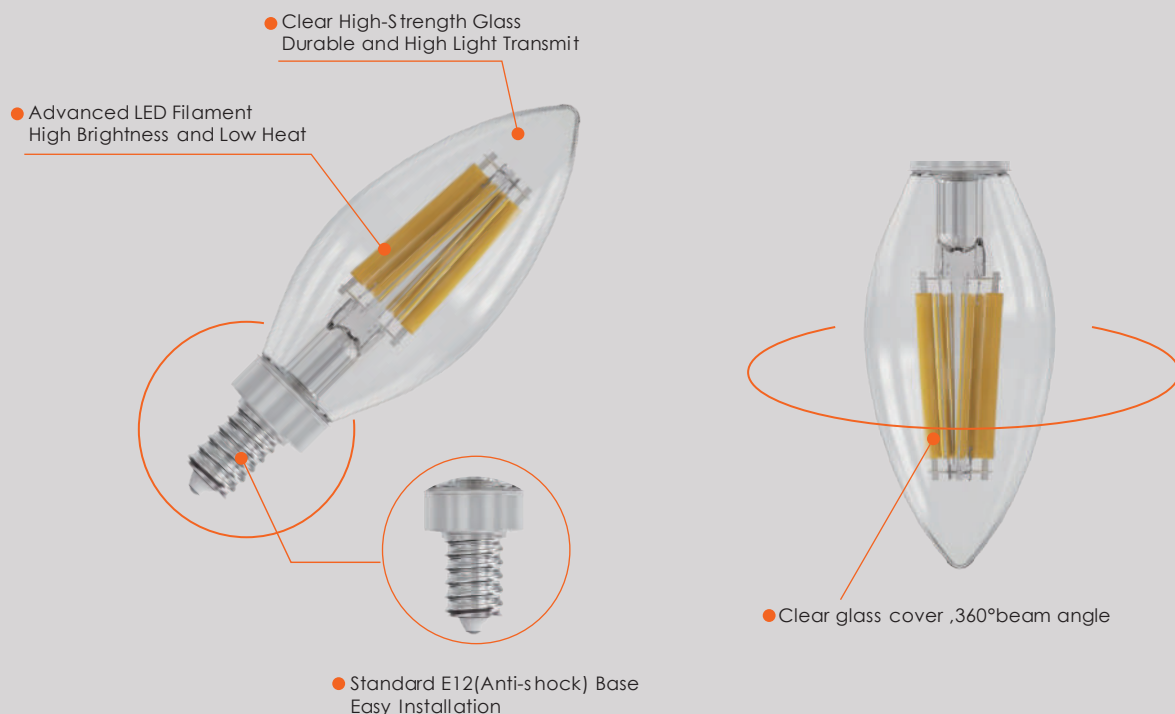

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FCW5.5-120	5.5W	662	126	613	118	646	125	651	137	633	144
VO-FCW5.5-120-30-F-D	5.5W	—	—	599	117	—	—	—	—	—	—
VO-FCA-WH-W5.5-120	5.5W	—	—	579	119	649	129	600	109	—	—



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

