

Sub-compact Type “PCFS” Foot Switches

These extremely compact PCFS miniature foot switches are certified by cULus for operation at 125-250VAC. Operation is momentary (spring return).

Features and specifications:

- **Materials:** Solid steel construction, with full guard and base pads
- **Dimensions** (without guard): 90x70x27mm; 3.5x2.75x1.1”
- **Contacts:** 1NO; snap-action
- **Grounding:** #8 grounding screw (provided)
- **Approvals:** cULus
- Redundant corrosion-resistant spring system
- Optional guards, oversize guards and stainless-steel guards available



Insulated-base PS/PD Foot Switches - Technical Information


General Characteristics	
Connection type	Quick-connect terminals
Cable size	18-14AWG
Cable entry	Internal cable clamp
Ingress protection	NEMA Type 1
Material	Steel

Information subject to change without notice

Type “PCFS” Sub-compact Foot Switches (Order by Part No.)

Part No.	Description	Rated Current	Rated HP	Rated Voltage	Contact
PCFS-3M	Sub-compact metal foot switch, momentary, 1NO	15A	1/2	125-250VAC	1NO snap
PCFS-3MC	Sub-compact metal foot switch, momentary, 1NO w/6' 18/3 cable	10A	1/3	125-250VAC	1NO snap
PCFS-3MG	Sub-compact metal foot switch, momentary, 1NO w/steel guard	15A	1/2	125-250VAC	1NO snap
PCFS-3-BG	Black metal guard for Sub-compact metal foot switch PCFS-3M	-	-	-	-
PCFS-3-YG-O	Metal guard; for 1 or 2 PCFS-3 series sub-compact foot switches	-	-	-	-

Information subject to change without notice

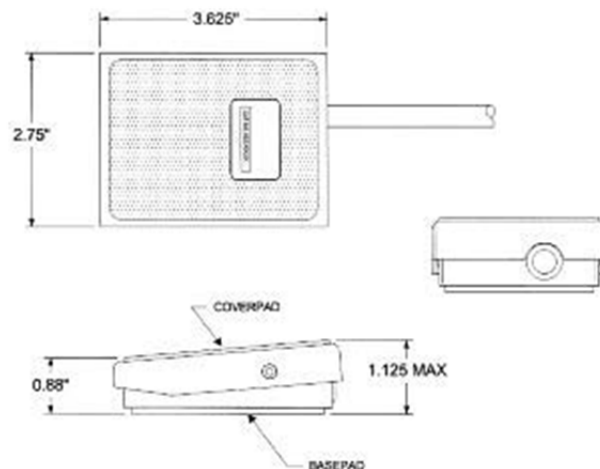

Two-Hand Safety Control Stations

The two-hand control stand is designed with safety in mind. Its special configuration prevents operating the controlled equipment unless the operator uses both hands. Supplementary controls can be added (up to three 22.5mm pushbuttons at the centre and 2 foot switches).

This device is composed of 3 different parts, to be ordered separately (Note: pushbuttons/switches/foot switches are not included):

- Stand (steel plate and tube, painted bright orange), adjustable height 700 to 1150mm. 4 holes for mounting on floor [PB-2029]
- Pushbutton panel, aluminum painted bright orange, with 2 + 3 22.5mm holes [PB-2031]
- Protection ring, steel, bright orange [PB-2003]

A standalone panel or wall mounted version is also available [PB-2030]


Two-Hand Safety Control Station (Order by Part No.)

Part No.	Description	Dimensions (mm)
PB-2031	Pushbutton panel stand mounting	450 x 100 x 156
PB-2030	Pushbutton panel panel mounting	450 x 100 x 156
PB-2029	Stand	H = 700 to 1150- Base 400x400
PB-2003	Protection ring	600 x 320

Information subject to change without notice

Please refer to ITC's 22.5mm Control Devices catalog for pushbuttons.

Dimensions

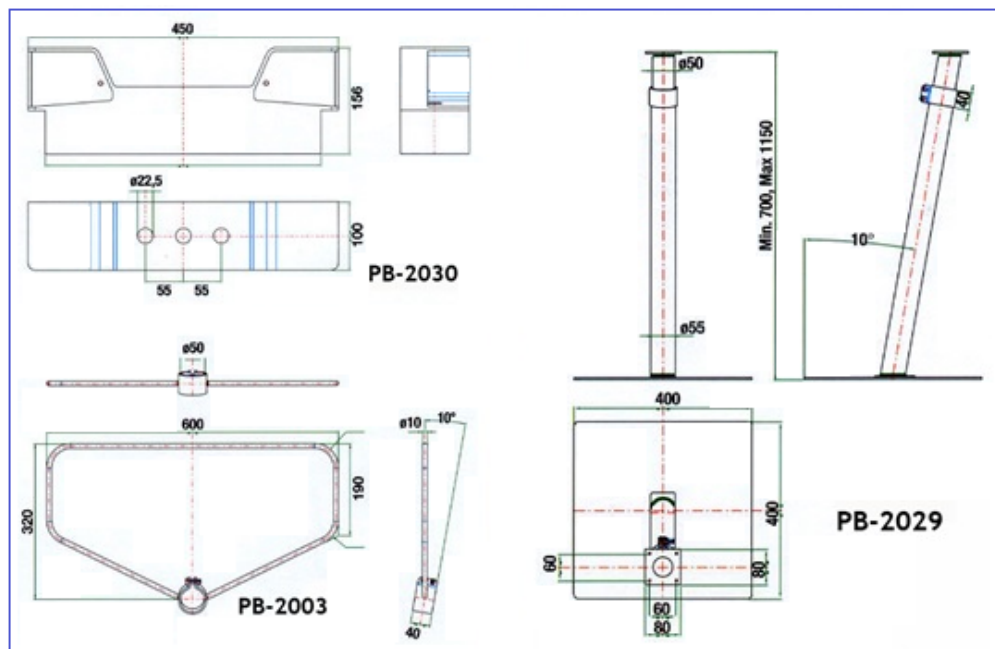

PB-2031/2030



PB-2003



PB-2029