


MGB-L1HE-ARA-L-119760 (Order no. 119760)

Locking set MGB-L1HE-ARA..., (guard locking by spring force) with 3 pushbutton, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ 1 pushbutton (illuminated, bu)
- ▶ 1 pushbutton (illuminated, with button labeling "Unlocked," wh)
- ▶ 1 pushbutton (illuminated, with button labeling "Locked," wh)
- ▶ With plug connector RC18
- ▶ With escape release
- ▶ Unicode

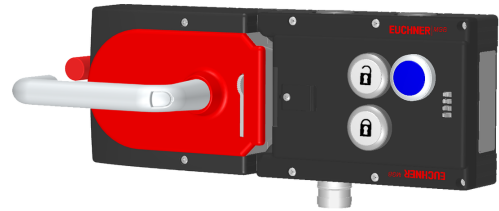

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
 L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Pushbuttons

- S1 1 NO contact, blue, illuminated
- S2 1 NO contact, white, illuminated (symbol: unlocked)
- S3 1 NO contact, white, illuminated (symbol: locked)

Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.