

Project	
Date	
Prepared By	
Model #	HBLWS185CCTWH5

## Specifications

### ELECTRICAL

Watts: 135, 155, 185  
 Voltage: 120-347VAC  
 Power Factor: >0.9  
 THD: ≤10%

Operating Temp. Range:  
 -20°C (-4°F) to 50°C (122°F)

### LIGHT

Initial Lumens: 27750  
 Lumens per Watt: 150  
 Color Temperature:  
 4000K, 5000K  
 CRI: 80  
 Dimming: 0-10V  
 Dimmable: Yes

### AGENCY APPROVALS

UL: Yes  
 RoHS: Yes  
 DLC® Premium: Yes

### PRODUCT DETAILS

Housing: Steel  
 Lens: PMMA optical glare-control lens  
 Warranty: 5 years  
 Fixture  
 Rated Life: 50,000 hours  
 Lumen Maintenance: L70  
 at 100,000 hrs  
 Weight: 5.5 LBS  
 Dimensions:  
 22.8"L x 10.2"W x 1.8"D



Norton Shores, Michigan 49441  
 T: 231.332.1188 | F: 231.726.5029  
 TOLL FREE: 866.632.7840  
 www.earthtronics.com

## Linear LED Highbay

Color & Wattage Selectable



### ORDER CODE:

11859

### MODEL NUMBER:

HBLWS185CCTWH5

### LUMEN LEVELS:

27750 lumens - 185 watts  
 23250 lumens - 155 watts  
 20250 lumens - 135 watts

### DLC® PRODUCT ID:

S-WL565D

### REBATE AVAILABILITY\*



### PRODUCT DESCRIPTION

EarthTronics LED Linear High Bay features two color selectable operations and wattage selectable options of 185, 155 or 135 watt. Switch between 4000K and 5000K easily at the time installation. EarthTronics LED High Bay offers a small, lightweight design that delivers excellent energy savings without sacrificing performance. This wattage selectable LED High Bay has a 1.9ft design and provides 20250 up to 27750 lumens. It also features a durable steel housing and with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. Optional sensors are audio jack screw in for easy installation.

### PRODUCT FEATURES

- + Lightweight, compact design
- + 120-347VAC
- + Operating at 150 lumens per watt
- + 6kV ANSI surge protection standard
- + Integral LED lens is constructed from PMMA and provides even illumination
- + Durable steel housing
- + Up to 50°C true ambient temperature
- + Driver standard with 0-10V dimming (prewired)
- + Suitable for damp locations
- + Hanging hardware included V-Hooks & chain
- + Emergency back-up driver available
- + 6ft 18/3 SJT cord sold separately (see available options)
- + DLC® Premium


### APPLICATIONS

- + Manufacturing Facility
- + Warehouse
- + Auditorium
- + Cafeteria
- + Gymnasium


Please consult installation instructions for proper application and use of this fixture.  
 \*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)



### PRODUCT DIMENSIONS

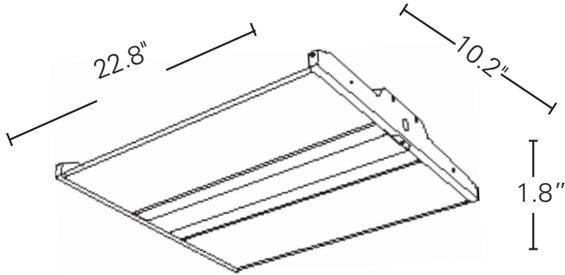


### LIGHTING LAYOUT


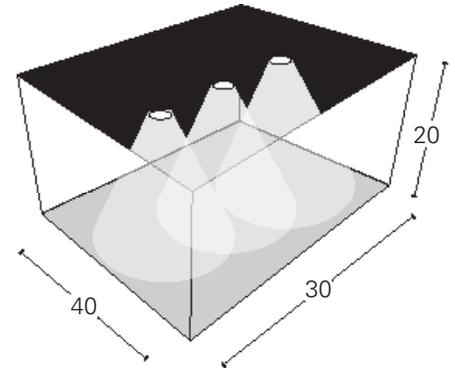


Average Illuminance: 30 fc  
 Number of Luminaires: 3  
 Workplane Height: 2.5 ft


### OPTIONAL ACCESSORIES

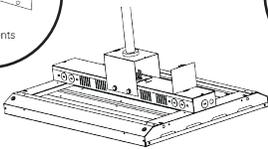


**Pendant Hanger**  
 Order Code: 1171

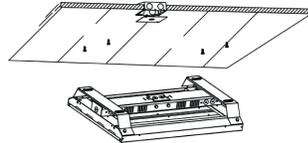

**Surface Mount**  
 Order Code: 11710




**Wire Guard**  
 Order Code:  
 11713

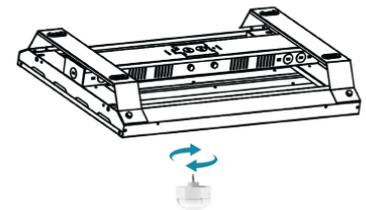

**12VDC Microwave Sensor**  
 Order Code: 11795

**Note:** One remote control (11796) for multiple microwave sensors.



**External Emergency  
 Back up Kit (30W)**  
 Order Code: 11617

#### 6ft 18/3 SJT cord available (sold separately)

- Order Code: 11836 6ft 18/3 SJTOOW 300V Cord - White (cord only)
- Order Code: 11837 6ft Cord (18/3 SJT White) with 5-15P 120V 15AMP Plug  
Straight Blade Plug - Black
- Order Code: 11838 6ft Cord (18/3 SJT White) with NEMA L7-15P 277V 15AMP  
Twist Lock Plug - Black



#### EarthConnect Option

Order Code: 11806  
 Bluetooth Mesh Plug-In PIR sensor  
 controller (Audio Jack) 12VDC, full  
 function and daylight harvesting

Easily access our DLC qualified products with rebates in your area.

**ACCESS IT HERE:** [Rebate Finder - Linear LED Highbay](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

