

Integrated signal lamp, continuous light, blue, 12-230 V AC/DC, Diameter 70 mm



Figure similar

General technical data		
product designation	Continuous light element	
type of voltage of the operating voltage	AC/DC	
operating voltage		
• at DC rated value	12 ... 230 V	
• at AC at 50 Hz rated value	12 ... 230 V	
• at AC at 60 Hz rated value	12 ... 230 V	
relative positive tolerance of the operating voltage	10 %	
relative negative tolerance of the operating voltage	-10 %	
consumed active power	5 W	
reference code according to IEC 81346-2	P	
fastening method	Bayonet / flush mounting	
material	PC; PC/ABS; PA	
color	blue	
Mechanical data		
product component light source	No	
type of electrical connection	screw terminal	
outer diameter of the signal column element	75 mm	
Lamp		
socket design	BA 15d	
design of the optical signal	continuous light	
type of light source	filament lamp / LED	
Ambient conditions		
ambient temperature during operation	-20 ... +60 °C	
protection class IP	IP65	
depth	31 mm	
height	66 mm	
width	75 mm	
Certificates/ approvals		
General Product Approval	other	Environment



EG-Konf.



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5300-1AF>

Cax online generator


<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=8WD5300-1AF>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD5300-1AF>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5300-1AF&lang=en

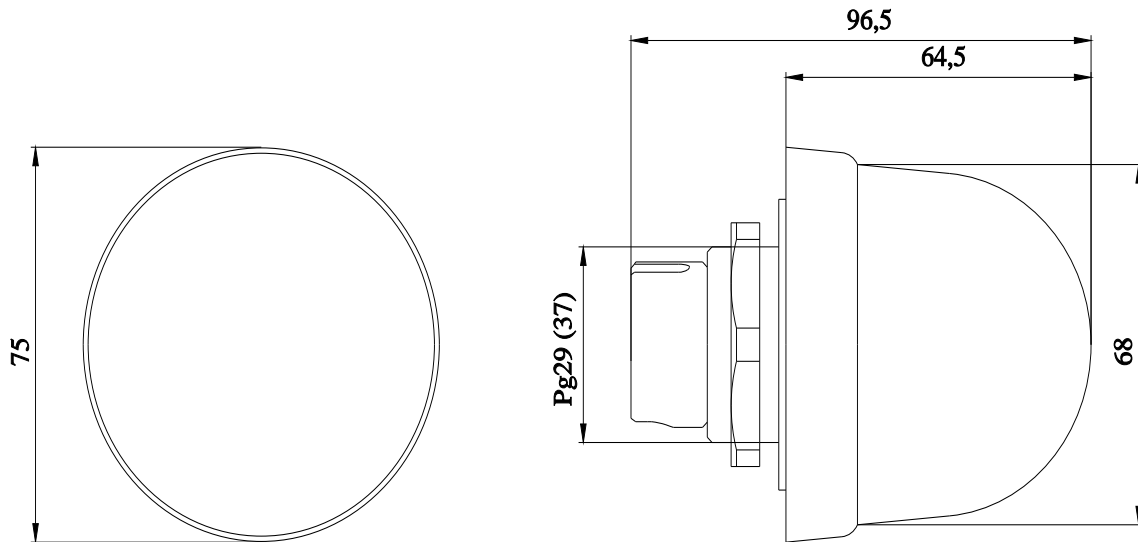

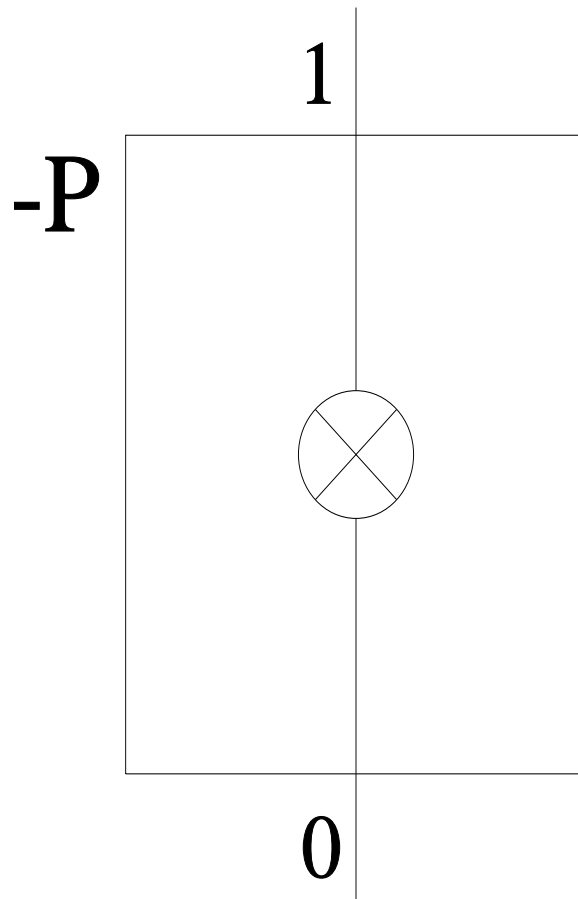

last modified:

4/1/2025 