



incandescent lamp, 24 V AC/DC, 5 CO contacts, base BA15d, accessory for signaling columns, with diameter 50 mm + 70 mm, (packing unit 10 units)

product brand name	SIRIUS		
product designation	Incandescent lamp		
General technical data			
type of voltage of the operating voltage	AC/DC		
operating voltage	<ul style="list-style-type: none"> • 1 at DC rated value 24 V • 1 at AC at 50 Hz rated value 24 V • 1 at AC at 60 Hz rated value 24 V 		
relative positive tolerance of the operating voltage	10 %		
relative negative tolerance of the operating voltage	-10 %		
reference code according to EN 61346-2	P		
Lamp			
type of light source	filament lamp		
socket design	BA 15d		
Enclosure			
height	42 mm		
width	16 mm		
outer diameter of the signal column element	70 mm		
Ambient conditions			
ambient temperature during operation	-20 ... +50 °C		
Approvals Certificates			
General Product Approval	Maritime application	other	Environment




[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4328-1XX>
 Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4328-1XX>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/8WD4328-1XX>
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4328-1XX&lang=en

-P

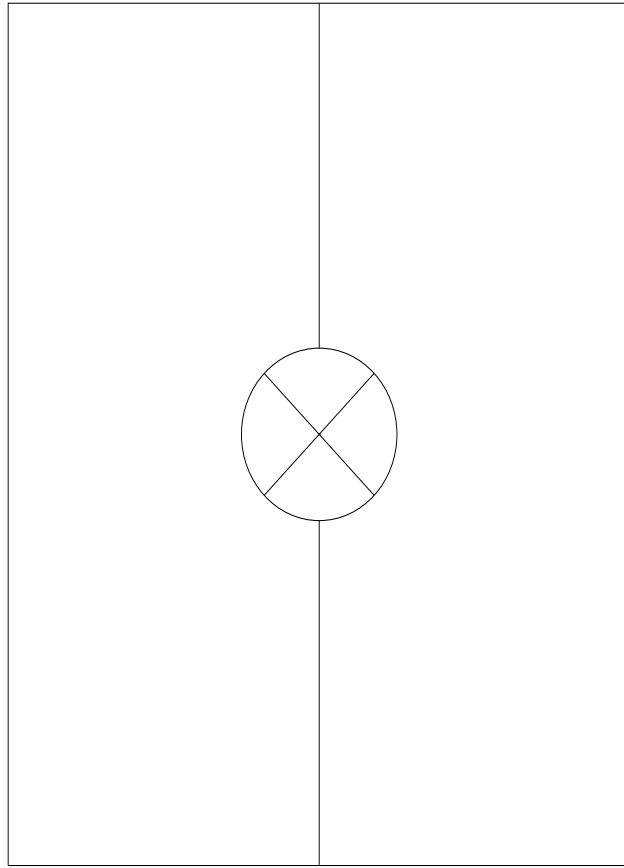

last modified:

4/1/2025 