

incandescent lamp, 115 V AC, 5 CO contacts, base BA15d, accessory for signaling columns, with diameter 50 mm + 70 mm, (packing unit 10 units)



product brand name	SIRIUS		
product designation	Incandescent lamp		
<b>General technical data</b>			
type of voltage of the operating voltage	AC		
operating voltage			
• 1 at AC at 50 Hz rated value	115 V		
• 1 at AC at 60 Hz rated value	115 V		
relative positive tolerance of the operating voltage	10 %		
relative negative tolerance of the operating voltage	-10 %		
reference code according to EN 61346-2	P		
<b>Lamp</b>			
type of light source	filament lamp		
socket design	BA 15d		
<b>Enclosure</b>			
height	42 mm		
width	16 mm		
outer diameter of the signal column element	70 mm		
<b>Ambient conditions</b>			
ambient temperature during operation	-20 ... +50 °C		
<b>Approvals Certificates</b>			
General Product Approval	Maritime application	other	Environment



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4348-1XX>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4348-1XX>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4348-1XX>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4348-1XX&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4348-1XX&lang=en)

**-P**

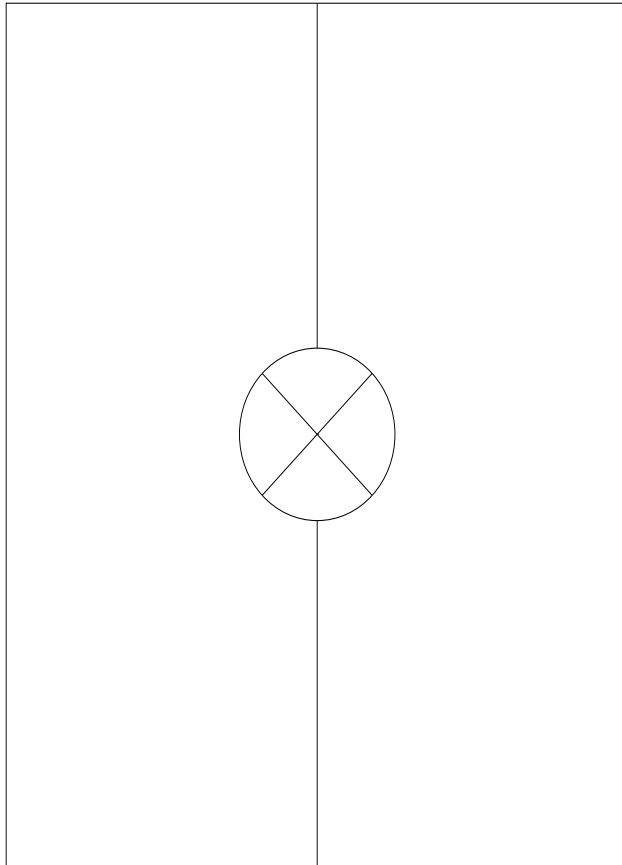

---

last modified:

4/1/2025 