

LED, base BA15d, yellow, 24 V AC/DC, accessory for signaling columns, with diameter 50 mm and 70 mm



Figure similar

product brand name	SIRIUS	
product designation	LED	
<b>General technical data</b>		
type of voltage of the operating voltage	AC/DC	
operating voltage		
• 1 at DC rated value	24 V	
• 1 at AC at 50 Hz rated value	24 V	
• 1 at AC at 60 Hz rated value	24 V	
relative positive tolerance of the operating voltage	10 %	
relative negative tolerance of the operating voltage	-15 %	
consumed current maximum	16 mA	
reference code according to EN 61346-2	P	
<b>Lamp</b>		
type of light source	LED	
light intensity	0.4 cd	
socket design	BA 15d	
<b>Enclosure</b>		
height	45 mm	
width	20 mm	
outer diameter of the signal column element	70 mm	
color	yellow	
<b>Ambient conditions</b>		
ambient temperature during operation	-20 ... +60 °C	
<b>Approvals Certificates</b>		
General Product Approval	other	Environment




[Confirmation](#)

[Environmental Confirmations](#)

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4428-6XD>  
 Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4428-6XD>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

**-P**

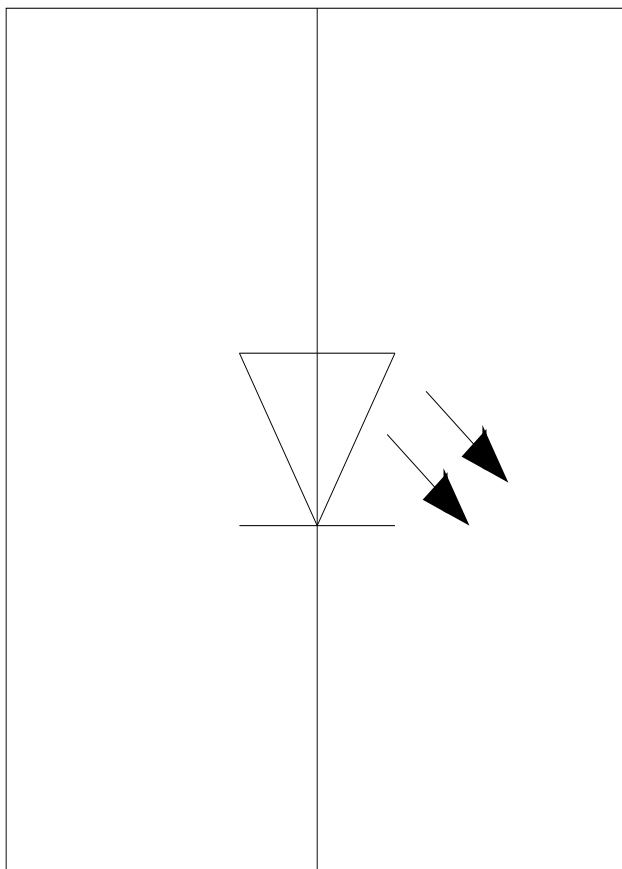

last modified:

4/1/2025 