

LED, base BA15d, clear, 24 V AC/DC, accessory for signaling columns, with diameter 50 mm and 70 mm



Figure similar

|  |                |             |
|--|----------------|-------------|
| product brand name                                   | SIRIUS         |             |
| product designation                                  | LED            |             |
| <b>General technical data</b>                        |                |             |
| type of voltage of the operating voltage             | AC/DC          |             |
| operating voltage                                    |                |             |
| • 1 at DC rated value                                | 24 V           |             |
| • 1 at AC at 50 Hz rated value                       | 24 V           |             |
| • 1 at AC at 60 Hz rated value                       | 24 V           |             |
| relative positive tolerance of the operating voltage | 10 %           |             |
| relative negative tolerance of the operating voltage | -15 %          |             |
| consumed current maximum                             | 15 mA          |             |
| reference code according to EN 61346-2               | P              |             |
| <b>Lamp</b>  |                |             |
| type of light source                                 | LED            |             |
| light intensity                                      | 1.4 cd         |             |
| socket design  | BA 15d         |             |
| <b>Enclosure</b>                                     |                |             |
| height   | 45 mm          |             |
| width  | 20 mm          |             |
| outer diameter of the signal column element          | 70 mm          |             |
| color  | clear          |             |
| <b>Ambient conditions</b>                            |                |             |
| ambient temperature during operation                 | -20 ... +60 °C |             |
| <b>Approvals Certificates</b>                        |                |             |
| General Product Approval                             | other          | Environment |



[Confirmation](#)



**Environment**

[Environmental Confirmations](#)

## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4428-6XE>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4428-6XE>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4428-6XE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4428-6XE&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4428-6XE&lang=en)

**-P**

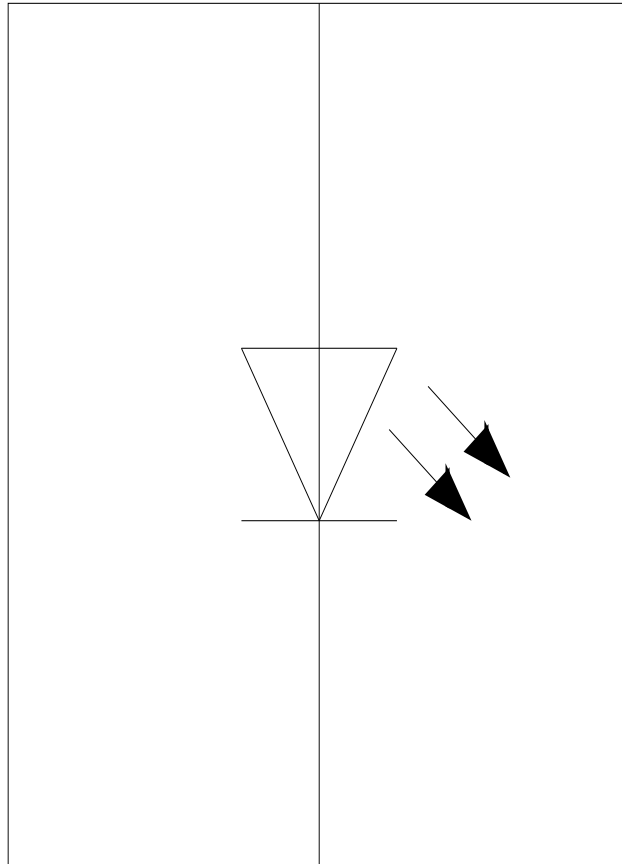

last modified:

4/1/2025 