



device adapter for SIRIUS circuit breaker size S3, IEC 100A/690 V, UL 100A/600 V, AWG4, 25 mm<sup>2</sup>, length 200 mm, width 72 mm cable outlet at top cable max. 150° welded on length 153 mm, for busbar thicknesses 5 mm and 10 mm, TT profile

Model	
product brand name	SETRON
product designation	Device adapter
design of the product	Accessories
Connections	
type of electrical connection	AWG 4
Mechanical Design	
height	200 mm
width of the adapter	72 mm
depth	55 mm
thickness of the busbar	
• minimum	5 mm
busbar center-to-center spacing	60 mm
net weight	650 g

Approvals Certificates	
General Product Approval	Test Certificates



EG-Konf.



UL



UR



[Special Test Certificate](#)

Test Certificates	Maritime application
-------------------	----------------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



ABS



BUREAU VERITAS



DNV



LRS

Maritime application	other	Environment
----------------------	-------	-------------



PRS



RINA

[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information
---------------------

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1211-4TR00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1211-4TR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1211-4TR00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4TR00)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

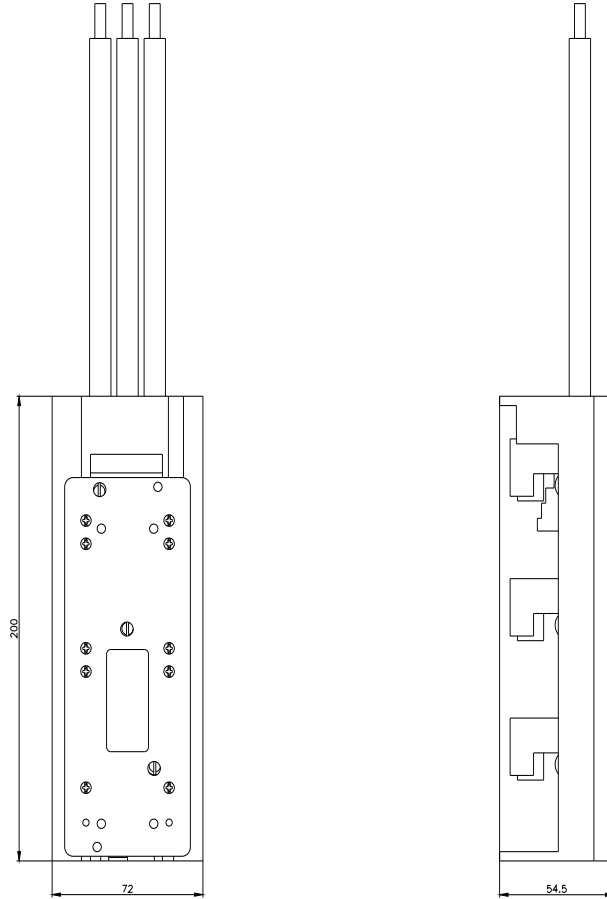

last modified:

4/11/2025 

