



plug-in socket for PT relay, 3 changeover contacts, screw terminal

product type designation	LZS
<b>General technical data</b>	
display version LED	No
switching behavior	monostable
reference code according to IEC 81346-2	U
Substance Prohibitance (Date)	05/01/2012
Weight	55 g
<b>Switching Function</b>	
design of the switching function	changeover switch
<b>Mechanical data</b>	
product component plug-in socket	Yes
design of the snap-on socket base	Standard socket
design of the relay operating mechanism	poled
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
<b>Connections/ Terminals</b>	
product function removable terminal	No
type of electrical connection	screw terminal
type of connectable conductor cross-sections	
• solid	1x (1,0 ... 2,5), 2x 1,0, 2x 1,5, 2x 2,5
• finely stranded with core end processing	1x (1,0 ... 1,5), 2x 1,0, 2x 1,5
• for AWG cables solid	1x (18 ... 14), 2x 18, 2x 16, 2x 14
connectable conductor cross-section	
• solid	1 ... 2.5 mm <sup>2</sup>
• finely stranded with core end processing	1 ... 1.5 mm <sup>2</sup>
AWG number as coded connectable conductor cross section	
• solid	18 ... 14
tightening torque with screw-type terminals	0.5 ... 0.7 N·m
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	snap-on mounting
height	74 mm
width	27 mm
depth	41.5 mm
<b>Ambient conditions</b>	
ambient temperature	
• during operation	-40 ... +70 °C

- during storage
- during transport

-25 ... +70 °C  
-25 ... +70 °C

### Approvals Certificates

General Product Approval

Maritime application

other



[Confirmation](#)

### Environment

[Environmental Confirmations](#)

### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT78730>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT78730>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT78730>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=LZS:PT78730&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT78730&lang=en)

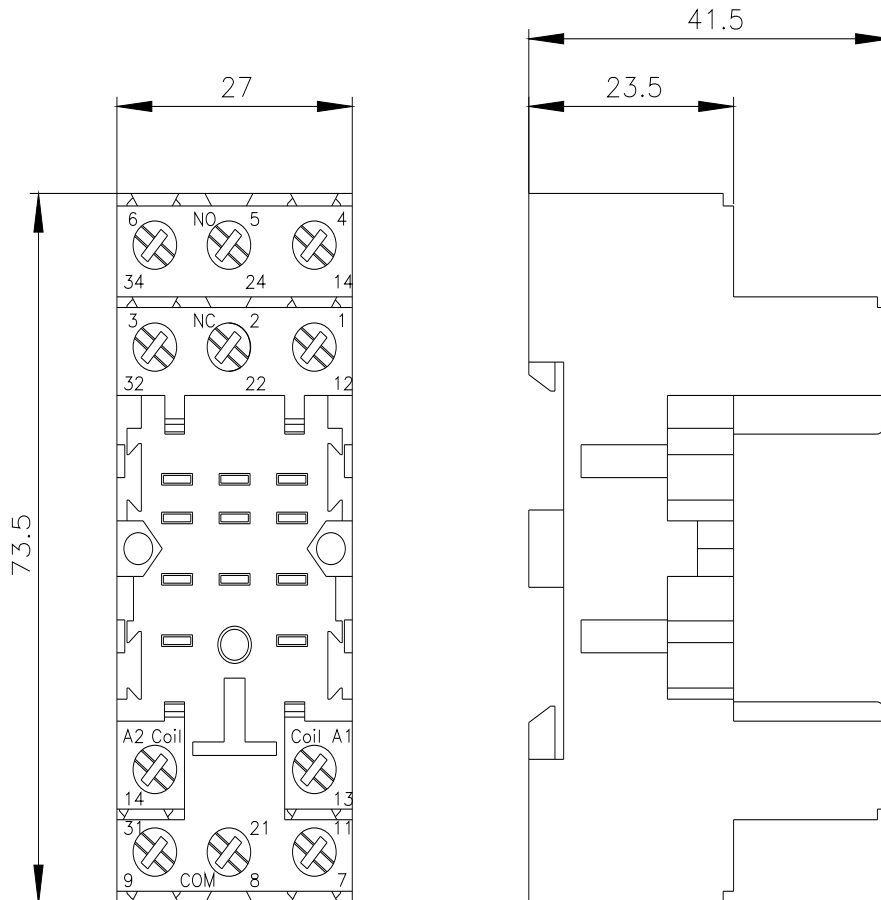

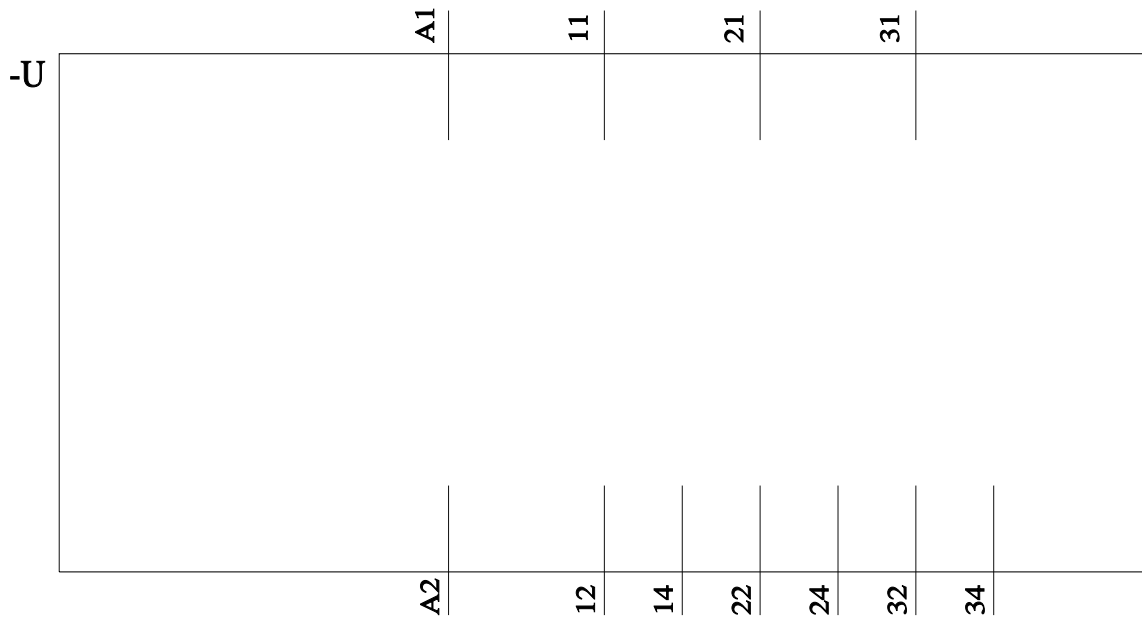

last modified:

4/2/2025 