

AS-Interface distributor compact for AS-i shaped cable IP 67/68/69K, max. 8 A



General technical data			
Type of device		AS-Interface accessories	
design of the product		AS-i compact distribution boards	
Function		distribution function for AS-i flat cables	
operating voltage according to AS-Interface specification	V	26.5 ... 31.6	
Note		cable must not end in the distribution board	
Connections/ Terminals			
type of electrical connection		insulation piercing method for AS-Interface flat cable	
Mechanical data			
Type of mounting		screw fixing	
Contacts Load rating max	A	8	
Ambient conditions			
ambient temperature	°C	-25 ... +75	
ambient temperature during storage	°C	-25 ... +85	
degree of protection		IP67/68/69K	
Certificates/ approvals			
General Product Approval	EMV	Marine / Shipping	other



[Confirmation](#)

### Environment

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1NN10>


Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NN10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NN10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

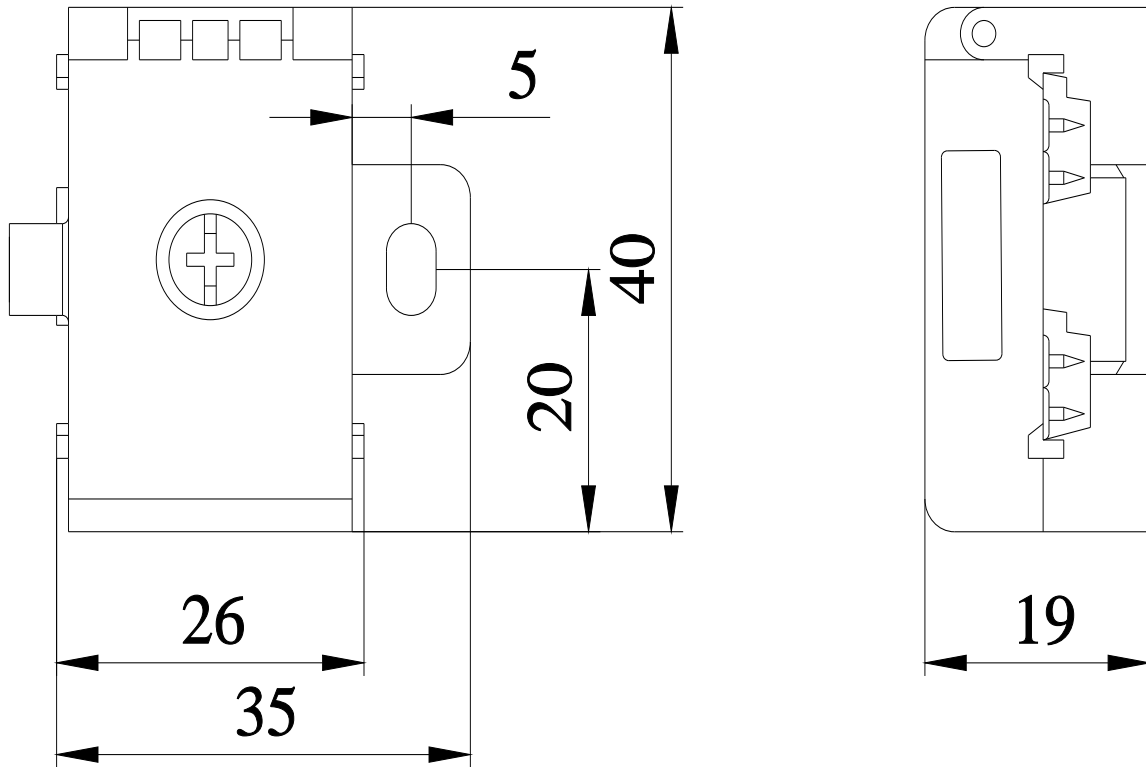

last modified:

4/1/2025 