

Centrifugal Blower Wheels

ALLTEMP



66-A8660
Illustrated

Applications

- Condensers
- Small Appliance
- Furnaces

Single Inlet Centrifugal Blower Wheels

- All single inlet blower wheels are galvanized steel.
- Rotation determined by viewing closed end.
- Wheel should be guarded.
- Tighten set screw securely.

Single Inlet Blower Wheels

Part #	Dia.	Width	Rot'n.	Bore	Max RPM
92-A8223	3 3/4"	2"	CW	1/4"	6500
92-A8222	3 3/4"	2"	CCW	1/4"	6500
66-A8650	3 13/16"	1 1/4"	CW	1/4"	7200
66-A8655	3 13/16"	1 1/4"	CCW	1/4"	7200
66-A8660	4"	1"	CW	1/4"	7200
66-A8665	4"	2"	CW	5/16"	7200
66-A8666	4"	2"	CW	3/8"	4500
66-A8667	4"	2"	CCW	3/8"	4500
66-A8610	4 1/4"	2"	CCW	5/16"	3000
66-A8640	4 1/4"	3"	CW	1/4"	3000
66-2-0542	4 3/4"	3"	CW	5/16"	3600
66-2-0328	4 3/4"	3"	CCW	5/16"	3600
66-2-0697	4 3/4"	3 1/2"	CW	5/16"	3600
66-2-0426	4 3/4"	3 1/2"	CCW	5/16"	3600
66-A508216	5"	2 1/2"	CCW	5/16"	3600
66-A8676	5 1/4"	1 1/4"	CCW	5/16"	2800
66-A508202	5 1/4"	2"	CCW	5/16"	3600
66-2-0253	5 1/4"	2 1/2"	CW	5/16"	3600
66-2-0047	5 1/4"	2 1/2"	CCW	5/16"	3600
66-2-0053	5 1/4"	3"	CW	5/16"	3600
66-2-0054	5 1/4"	3"	CCW	5/16"	3600
66-2-0281	5 3/4"	3"	CW	5/16"	3000
66-2-0350	5 3/4"	3"	CCW	5/16"	3000
66-2-1157	5 3/4"	3 1/2"	CW	5/16"	3000
66-2-0157	5 3/4"	3 1/2"	CCW	5/16"	3000
66-2-0353	5 3/4"	4"	CW	1/2"	2800
66-2-0338	5 3/4"	4"	CCW	1/2"	2800
66-A610215	6"	2 1/2"	CCW	5/16"	3600
66-A610220	6"	2 1/2"	CW	1/2"	3600
66-1-1548	6 5/32"	3 1/4"	CW	1/2"	2200

Table Continues

Single Inlet Blower Wheels - Table Continued


Part #	Dia.	Width	Rot'n.	Bore	Max RPM
66-1-4873	6 5/32"	3 1/4"	CCW	1/2"	2200
66-1-0098	6 5/32"	3 5/8"	CW	1/2"	2000
66-1-4952	6 5/32"	3 5/8"	CCW	1/2"	2000
66-1-9339	6 5/16"	3 7/8"	CW	1/2"	2000
66-1-9340	6 5/16"	3 7/8"	CCW	1/2"	2000
66-1-1077	6 5/16"	4"	CW	1/2"	2000
66-1-9341	6 5/16"	4"	CCW	1/2"	2000
66-A8652	6 5/8"	1 7/16"	CW	5/16"	4000
66-1-1074	7 1/8"	3 1/2"	CW	1/2"	1700
66-1-8350	7 1/8"	3 1/2"	CCW	1/2"	1700
66-1-5931	7 1/8"	3 3/4"	CW	1/2"	1500
66-1-9343	7 1/8"	3 3/4"	CCW	1/2"	1500
66-1-0166	7 1/8"	4"	CW	1/2"	1500
66-1-3978	7 1/8"	4"	CCW	1/2"	1500
66-1-4879	7 1/2"	3 1/2"	CW	1/2"	1800
66-1-6887-R	7 1/2"	9"	CCW	1/2"	1600
66-1-6071	8"	3 1/2"	CCW	1/2"	1850
66-1-0464	8"	3 1/2"	CW	1/2"	1850
66-1-0203	8"	3 1/2"	CCW	1/2"	1850
66-1-0206	8"	4"	CW	1/2"	1650
66-1-0207	8"	4"	CCW	1/2"	1650
66-1-3705	8 1/2"	3"	CW	1/2"	2050
66-1-9344	8 1/2"	3"	CCW	1/2"	2050
66-1-5266	9 1/8"	4 1/4"	CW	1/2"	1500
66-1-5693	9 1/8"	4 1/4"	CCW	1/2"	1500
66-1-4697	9 1/8"	5"	CW	1/2"	1350
66-1-0242	9 1/8"	5"	CCW	1/2"	1350
66-1-4620	9 7/8"	4"	CW	1/2"	1350
66-1-9342	9 7/8"	4"	CCW	1/2"	1350
66-1-2073	9 7/8"	6"	CW	1/2"	1100
66-1-2074	9 7/8"	6"	CCW	1/2"	1100

Bake Elements



37-UB300 2000W/240V W - 13.00" L - 11.10" I - 1.875" Straight Screw Terminals Replaces EB-450, RB-431, AM001-087, 902351 TIBK 40002-001	37-UB303^U 2000W/240V W - 13.00" L - 14.55" I - 1.875" Straight Screw Terminals Replaces EB-210-211-360, RB-166, AM001-096, 902352 TIBK 40002-002	37-UB323[*] 3000W/240V W - 13.00" L - 16.55" I - 1.875" Straight Screw Terminals Replaces EB-220-430, RB-407-440, AM001-007, AM001-092, 902785, 201937 TIBK 40002-007	37-UB324[*] 3000W/240V W - 13.00" L - 17.25" I - 1.875" Straight Screw Terminals Replaces EB-340-470-330, RB-410, AM001-048, AM001-078, 902215, 902326 TIBK 40002-004	37-UB400^{DEM} 2400W/240V W - 14.75" L - 14.63" I - 3.375" 90° Spade Terminals Replaces 211818-1050 Frigidaire Small TIBQ 40020-002
37-UB474[*] 2500W/240V W - 15.55" L - 14.55" I - 1.875" Straight Screw Terminals Replaces EB-472-510-520-521, RB-202-203, AM001-080, AM001-098, 902299, 902326 TIBK 40003-005	37-UB481^U 2100W/240V W - 15.55" L - 14.55" I - 3.375" Straight Screw Terminals Replaces EB-473-570, RB-155, AM001-037, 902322 TIBK 40003-003	37-UB482^U 2500W/240V W - 15.55" L - 14.55" I - 3.875" Straight Screw Terminals Replaces EB-550, RB-152-172-234, AM001-009, 902304 TIBK 40003-003	37-UB484^U 2500W/240V W - 15.55" L - 16.5" I - 1.875" Straight Screw Terminals Replaces EB-530, RB-413, AM001-005, 902302 TIBK 40003-004	37-UB592[*] 2500W/240V W - 17.50" L - 15.05" I - 3.875" Straight Screw Terminals Replaces EB-582-590-620, AM001-004, AM001-055, AM001-089, 902331, 201978 TIBK 40004-003
37-UB593[*] 3000W/240V W - 17.50" L - 15.05" I - 1.875" Straight Screw Terminals Replaces EB-650-670, RB-404-418, AM001-002, AM001-051, 902208 TIBK 40004-004	37-UB639^{GE} 3000W/240V W - 18.50" L - 15.00" I - 3.875" Straight Spade Terminals Replaces WB44M162, WB44M169 TIBK 40004-001	37-UB640^{GE} 3000W/240V W - 18.50" L - 16.00" I - 3.875" Straight Spade Terminals Replaces WB44M164, WB44M167, AM001-111P TIBQ 40036-001	37-UB641^{GE} 3000W/240V W - 18.50" L - 16.00" I - 3.875" Straight Screw Terminals Replaces WB44M147, WB44M161, RB147, AM001-111, 40020-001 TIBK 40035-001	37-UB642[*] 3000W/240V W - 18.50" L - 14.55" I - 3.875" Straight Screw Terminals Replaces EB-740, RB-147, AM001-111, WB44M147, 902808 TIBK 40005-004
37-UB643^U 3000W/240V W - 18.50" L - 14.55" I - 1.875" Straight Screw Terminals Replaces EB-548-640-780, RB-425-427, AM001-025, AM001-081, 902314 TIBK 40005-003	37-UB644^U 3000W/240V W - 18.50" L - 15.55" I - 3.875" Straight Screw Terminals Replaces EB-572-720, RB-224, AM001-052, 902328 TIBK 40005-001	37-UB706^{DEM} 2500W/250V W - 18.88" L - 14.63" I - 1.500" Straight Spade Terminals Replaces 9750213 Inglis/ Whirlpool TIBQ 40018-001	37-UB732[*] 3000W/240V W - 19.25" L - 15.55" I - 1.875" Straight Screw Terminals EB-730-760-790, RB-420-423, RBMM30, AM001-016, AM001-057-090, 902209, 902211, 902308 TIBK 40006-002	37-UB750^{DEM} 3000W/240V W - 19.75" L - 15.38" I - 3.375" 90° Spade Terminals Replaces 211818-1010, 211818-1040 Frigidaire TIBQ 40020-001
37-UB813[*] 2500W/240V W - 20.25" L - 14.55" I - 3.875" Straight Screw Terminals Replaces EB-860-862, RB-224, AM001-001-072, 902346 TIBK 40007-007	37-UB814[*] 3000W/240V W - 20.25" L - 14.55" I - 1.875" Straight Screw Terminals Replaces EB-820, RB-154, AM001-003, 902301 TIBK 40007-008	37-UB822[*] 3000W/240V W - 20.25" L - 16.55" I - 1.875" Straight Screw Terminals Replaces EB-830-870-872-890, RB-417, AM001-006, 902075, 902354 TIBK 40007-009	37-UB962[*] 3000W/240V W - 22.50" L - 14.55" I - 1.875" Straight Screw Terminals Replaces EB-910-911-960-890, RB-419, AM001-011, 902305 TIBK 40008-001	37-UB963[*] 3000W/240V W - 22.50" L - 14.55" I - 3.875" Straight Screw Terminals Replaces EB-920-922, RB-186-218, AM001-076-095, 902372, 902380 TIBK 40008-004
37-UB964[*] 3000W/240V W - 22.55" L - 14.55" I - 3.875" Straight Screw Terminals Replaces EB-930, RB-151, AM001-010, 902076 TIBK 40008-003	37-UB483^D 2200W/240V W - 15.55" L - 16.00" I - 1.875" Straight Screw Terminals Replaces EB-440-480-540-542-560, RB408, AM001-014, 902307, 902325 TIBK 40009-001	37-UB870^D 2500W/240V W - 20.25" L - 16.00" I - 2.750" Straight Spade Terminals Replaces Maytag 74003019 Maytag U Bracket TIBQ 40009-003	37-UB873^D 2500W/240V W - 21.25" L - 16.00" I - 1.875" Straight Screw Terminals Replaces EB-880-882, RB-146, AM001-062, 902210, 902325 TIBK 40009-002	

Electric Water Heater Thermostats

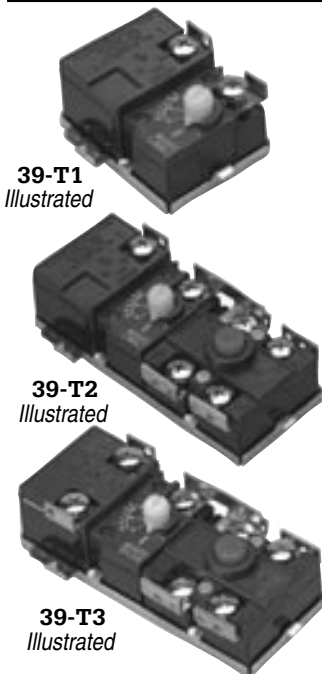

39-T1
Illustrated

39-T2
Illustrated

39-T3
Illustrated

Settings	Temperature
Dot:	110°F
Hot:	120°F
A:	130°F
B:	140°F
C:	150°F
Very Hot:	160°F

Electric Water Heater Thermostats

- Built-in safety shutoff prevents overheating.
- Come with plastic shock shield covers.
- 39-T2 & T3 feature a built-in high limit control.
- Includes installation instructions.
- Calibrated scale 160°/ 120°/ 110°F.
- Dual voltage 120V or 240V.
- Adjustable temperature ranges.
- Screw or clamp mounted.
- Commercial & residential applications.
- UL & CSA approved.
- Individually Packaged.

Part #	Description	Equivalent
39-T1	Lower or single element thermostat SPST (2 terminal)	39-H1
39-T2	Combination: 240V, Lower or single element thermostat SPST (2 terminal) with high limit DPST 190°F (4 terminal) - manual reset.	39-H1 + 39-HL190
39-T3	Combination: Upper element thermostat SPDT (3 terminal) with high limit DPST 190°F (4 terminal) - manual reset.	39-H2 + 39-HL190


Thermostat (39-T1, T2 & T3)

Calibrated to 120°F
Temperature Range 110° to 160°F
Differential Temp. 7°F to 17°F
39-T2 Single pole/ Single throw
39-T3 Single pole/ Double throw
30A 120 to 250VAC
22A 277VAC
12.5A 480VAC
125VA. PT. DTY. 120 to 480VAC


High Limit (Included On 39-T2 & T3)

Opening Temp. 180°F
Manual reset, Double pole/ Single throw
40A 120 to 277VAC
25A 480VAC
125VA. PT. DTY. 120 to 480VAC


39-T1, T2, T3 Wiring Diagram



39-T1

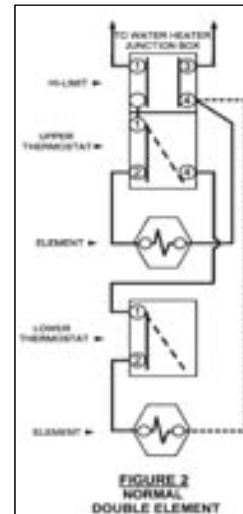


39-T1 + 39-T3

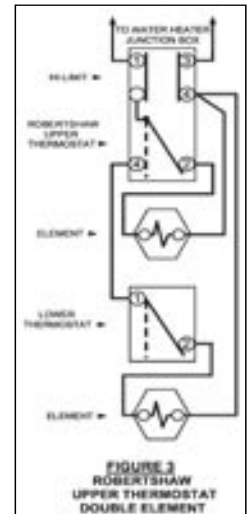

39-T1 + 39-T2

Electric Water Heater Thermostats

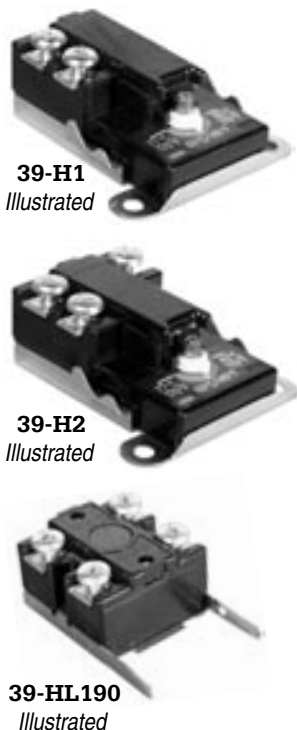

39-H1
Illustrated

39-H2
Illustrated

39-HL190
Illustrated

Therm-O-Disc Electric Water Heater Thermostats

- Calibrated scale 170°/ 140°/ 110°F.
- Dual voltage 120V or 240V.
- Adjustable temperature ranges.
- Screw or clamp mounted.
- Commercial & residential applications.
- UL & CSA approved.
- Individually Packaged.

Part #	Description
39-H1	Lower or single element thermostat SPST (2 terminal) Circuit opens on temperature rise.
39-H2	Upper element thermostat SPDT (3 terminal), Circuit 1 opens on temperature rise, Circuit 2 opens on temperature fall.
39-HL190	High Limit Manual Reset Control • Trip-free manual reset, (4 terminal). • Electrical circuit opens when the thermostat reaches 190°F. • Designed to snap directly on either the 39-H1 or 39-H2.


Thermostat (39-H1 & H2)

Calibrated to 140°F
Temperature Range 110° to 170°F
Differential Temp.
39-H1 5°F to 15°F Single pole/ Single throw
39-H2 17°F to 27°F Single pole/ Double throw
30A 250VAC
25A 277VAC
12.5A 480VAC
125VA. PT. DTY. 120 to 480VAC


High Limit (39-HL190)

Opening Temp. 190°F
Manual reset, Double pole/ Single throw
40A 120 to 277VAC
25A 480VAC
125VA. PT. DTY. 120 to 480VAC

39-H1, H2, & HL190 Wiring Diagram



39-H1 + 39-HL190

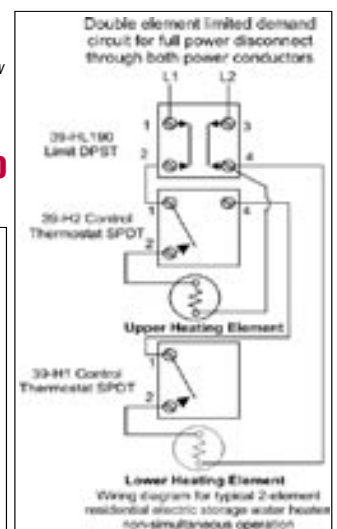

39-H1 + 39-H2 + 39-HL190

WARNING

Thermostats are factory preset at 120°F. Higher water temperatures increase the risk of scalds.