



SDC Series



100 AMP - MULTI POSITION 200 Amp Mains c/w Blank Compartment

CATALOGUE #	TYPE	DESCRIPTION	DIMENSIONS (IN.)			WEIGHT
			H	W	D	
SDC220PW	O/H & U/G	2 gang, c/w blank compartment on left side	12	22 ¹ / ₂	5	24 lbs.
SDC320PW	O/H & U/G	3 gang, c/w blank compartment on left side	12	30	5	32 lbs.
SDC420PW	O/H & U/G	4 gang, c/w blank compartment on left side	12	37 ¹ / ₂	5	40 lbs.
SDC520PW	O/H & U/G	5 gang, c/w blank compartment on left side	12	45	5	47 lbs.
SDC620PW	O/H & U/G	6 gang, c/w blank compartment on left side	12	52	5	56 lbs.

- Factory Bussed - 200 Amp mains
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- 100 Amp - 600 VOLTS per position
- Approved conductor range:
Line No. 6-250 MCM CU/AL
Load No. 6-1/0 AWG CU/AL
- Approved for overhead or underground use

- Field adaptable accessories
- 5th Jaw at 9 O'clock - **SXK503**
- For overhead order **SXC** hub separate
- Add suffix "RH" for right hand entry
- Add suffix "BC" for c/w 1 - 3" KO in the bottom

KNOCKOUT CODE	CONDUIT SIZE
D	1 ¹ / ₄ ", 1 ¹ / ₂ ", 2"
F	1, 1 ¹ / ₄ ", 1 ¹ / ₂ ", 2", 2 ¹ / ₂ ", 3"
AA	1 ¹ / ₂ "

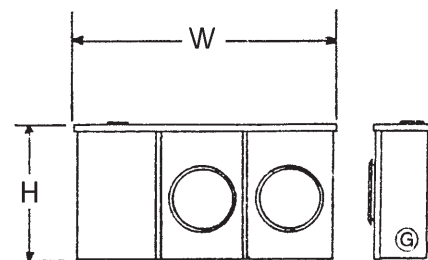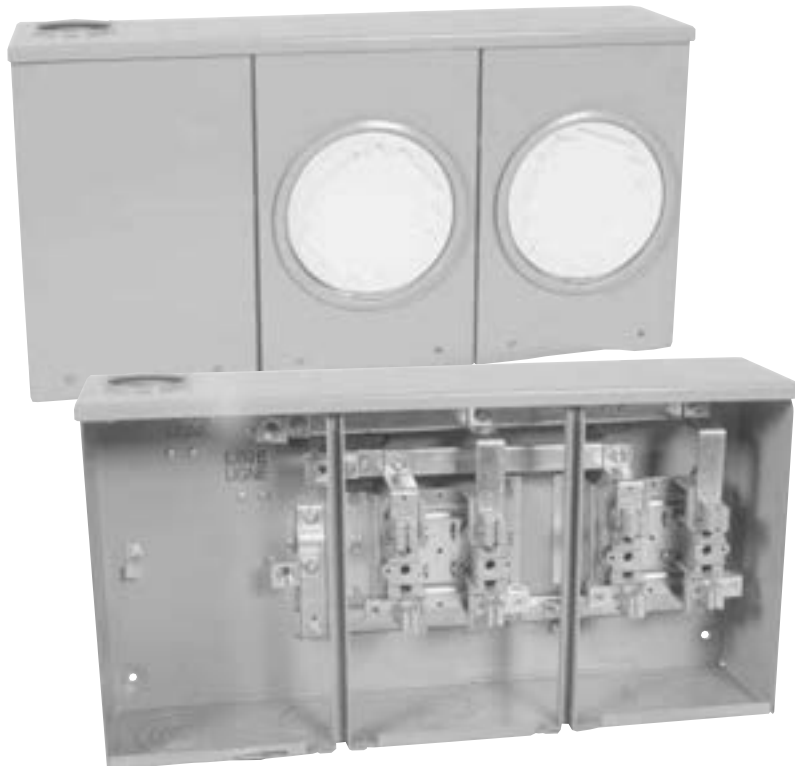

Extra Wiring Compartment

