



Locknut Aluminum

Features

- Tightens without deformation
- cULus listed

Applications

- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

Standard Material


- 6063 Aluminum

Standard Finish

- Stamped Aluminum

Certification

- UL File #: E224953

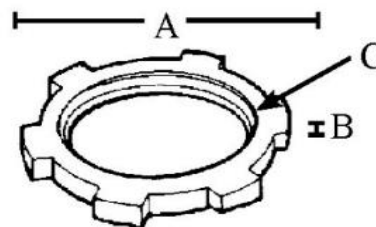

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight per 100 (lb)	Inches		Thread Pitch Diameter
						A	B	
ALK-05	13132	1/2"	100	1000	1	1.14	0.17	.787 - .797
ALK-07	13133	3/4"	100	1000	1	1.42	0.17	.999 - 1.009
ALK-10	13134	1"	100	1000	1	1.77	0.17	1.25 - 1.26
ALK-12	13135	1-1/4"	50	500	2	2.28	0.17	1.595 - 1.605
ALK-15	13136	1-1/2"	50	500	2	2.60	0.17	1.837 - 1.847
ALK-20	13137	2"	25	250	3	3.18	0.19	2.307 - 2.317
ALK-25	13138	2-1/2"	---	50	9	3.56	0.38	2.804-2.816
ALK-30	13139	3"	---	50	13	4.25	0.375	3.429-3.441
ALK-35	13140	3-1/2"	---	25	16	4.80	0.44	3.929-3.941
ALK-40	13141	4"	---	25	22	5.40	0.44	4.429-4.441
ALK-50	13142	5"	---	25	35	6.67	0.50	5.488-5.500
ALK-60	13143	6"	---	25	57	7.93	0.56	6.545-6.557

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com