



90° Liquidtight Connectors

Grey - Nylon



Features

- Liquidtight, raintight, oiltight
- For flexible non-metallic liquidtight tubing
- Easy assembly avoids having to remove the compression nut
- 90° angle
- Grey, also available in black
- Temperature Range: -18°C to 80°C dry, 60°C wet, 75°C oil

Applications


- For use in wet and dry locations

Standard Material

- 6/6 Nylon

Certification

- UL File #: E494632

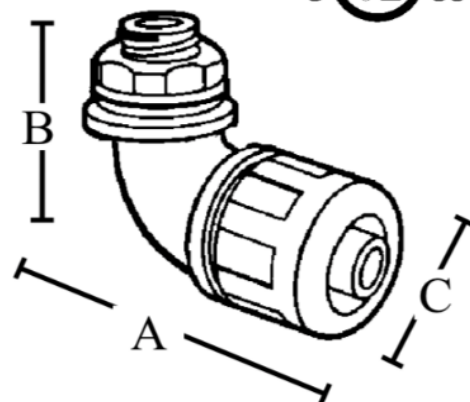

Catalog Number	UPC	Conduit Size	Unit Carton	Ship Case	Weight/Case	Inches		
						A	B	C
P490	14733	3/8" 1/2" KO	10	100	9	2.56	2.14	1.09
P491	14735	1/2"	10	100	8	2.56	2.14	1.09
P492	14737	3/4"	10	100	11	2.84	2.38	1.30
P493	14739	1"	3	50	8	2.25	2.81	1.50
P494	14741	1-1/4"	3	20	8	3.96	3.36	2.40
P495	14743	1-1/2"	3	20	10	4.13	3.45	2.68
P496	14745	2"	2	10	9	4.68	4.04	3.31

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com

Ref. 1