



Straight Liquidtight Connectors with Insulated Throat - Malleable Iron

Features

- Liquidtight, raintight, oiltight
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability

Applications

- To secure, ground and seal liquidtight conduit to a box or enclosure
- Straight connector for use with metallic liquid tight conduit. Liquidtight connectors are suitable for use in Class I, Div 2; Class II, Div 1 and 2; and Class III, Div 1 and 2 hazardous locations

Standard Material


- Malleable iron
- Steel locknut

Standard Finish

- Zinc plated

Certification

- UL File #: E224953

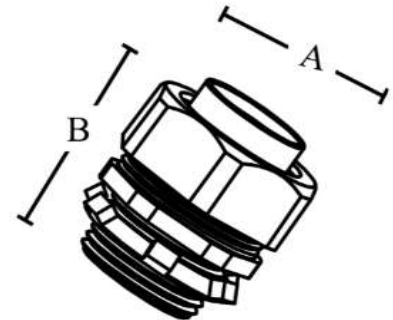

Catalog Number	UPC	Conduit Size	Unit	Carton	Ship Case	Weight/ Case	Inches	
							A	B
470S	12124	3/8" 1/2" KO	20	100	15	1.18	1.72	
471S	12129	1/2"	10	50	16	1.36	1.73	
472S	12134	3/4"	5	25	13	1.61	1.81	
473S	12139	1"	5	20	9	1.89	1.85	
474S	12144	1-1/4"	5	25	11	2.39	2.05	
475S	12149	1-1/2"	5	20	8	2.62	2.38	
476S	12154	2"	2	20	22	3.24	2.49	
477S	12158	2-1/2"	1	---	---	3.89	3.21	
478S	12161	3"	1	---	---	4.74	3.37	
479S	15609	3-1/2"	1	---	---	5.31	3.40	
480S	12167	4"	1	---	---	5.82	3.66	

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4
 TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268
www.nescocanada.com