



Plastic Insulating Bushings

105°C Flame Retardant

Features

- Rated flame retardant to 105°C

Applications


- Indoor or outdoor use
- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

Standard Material

- Thermoplastic

Certification

- UL File #:E33623

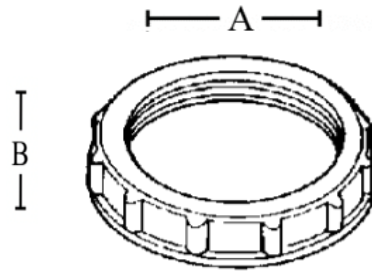

Catalog Number	UPC	Size	Box Qty	Ship Case	Weight (lb) per 100	Inches	
						A	B
BUS-05	13393	1/2"	200	2000	1	1.06	0.43
BUS-07	13394	3/4"	100	1000	1	1.31	0.43
BUS-10	13395	1"	50	500	2	1.59	0.48
BUS-12	13396	1-1/4"	25	250	2	1.96	0.56
BUS-15	13397	1-1/2"	25	250	2	2.18	0.56
BUS-20	13398	2"	50	500	3	2.68	0.59
BUS-25	13399	2-1/2"	20	---	4.8	3.25	0.72
BUS-30	13400	3"	10	---	9.3	3.87	0.75
BUS-35	13401	3-1/2"	10	---	9.4	4.37	0.77
BUS-40	13402	4"	10	---	7.5	5	0.77
BUS-50	13403	5"	5	---	12	6.25	1
BUS-60	13404	6"	5	---	20	7.50	1

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4
 TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268
www.nescocanada.com