



EMT Raintight Couplings

Compression Type - Steel



Features

- Raintight and concrete tight
- Compression type couplings
- Assembled with an internal gasket

Applications

- Use to join two lengths of EMT in wet or dry location installations



Standard Material


- Steel

Standard Finish

- Zinc plated

Certification

- UL File #: E325997

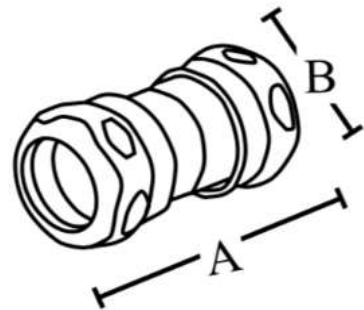

Catalog Number	UPC	Size	Box Qty	Ship Case	Weight (lb) per 100	Inches	
						A	B
TRTSCP-05	15442	1/2"	25	250	12	1.63	1.13
TRTSCP-07	15543	3/4"	25	250	18	1.75	1.38
TRTSCP-10	15544	1"	20	100	24	1.88	1.69
TRTSCP-12	15545	1-1/4"	25	---	49.3	2.25	2.06
TRTSCP-15	15546	1-1/2"	20	---	66.3	2.25	2.25
TRTSCP-20	15547	2"	15	---	83.7	2.38	2.75
TRTSCP-25	15548	2-1/2"	12	---	153	3.88	3.63
TRTSCP-30	15549	3"	6	---	221	4.00	4.25
TRTSCP-35	15550	3-1/2"	5	---	338	4.69	4.69
TRTSCP-40	15551	4"	6	---	341	4.94	5.19

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com