



90° Liquidtight Connectors with Insulated Throat - Malleable Iron



Features

- Liquidtight, raintight, oiltight
- Suitable for wet location use
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability

Applications

- To secure, ground and seal liquidtight conduit to a box or enclosure
- cULus listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

Standard Material


- Malleable iron
- Steel locknut

Standard Finish

- Zinc plated

Certification

- UL File #: E224953

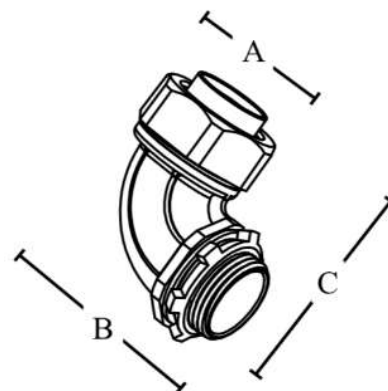

Catalog Number	UPC	Conduit Size	Unit Carton	Ship Case	Weight/Case	Inches		
						A	B	C
490S	12180	3/8" 1/2" KO	10	50	26	1.18	1.96	2.47
491S	12184	1/2"	10	50	28	1.36	2.10	2.54
492S	12188	3/4"	5	25	41	1.61	2.45	2.82
493S	12192	1"	5	50	31	1.89	2.83	3.08
494S	12196	1-1/4"	5	20	20	2.39	3.15	3.53
495S	12200	1-1/2"	2	20	25	2.62	3.50	4.17
496S	12204	2"	2	20	---	3.24	4.02	4.69
497S	12209	2-1/2"	1	---	---	3.89	6.23	6.74
498S	12211	3"	1	---	---	4.74	6.91	7.52
500S	12253	4"	1	---	---	5.82	8.07	8.72

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com

Ref. 1

