



Steel Locknuts

Steel, Zinc Plated

Features

- Tightens without deformation
- cULus listed

Applications

- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

Standard Material


- Steel

Standard Finish

- Zinc Plated

Certification

- UL File #: E224953

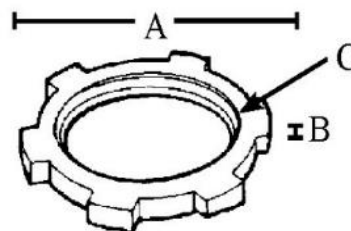

Catalog Number	UPC	Size	Threads Per Inch	Unit Carton	Ship Case	Weight (lb) per 100	Inches		Thread Pitch Diameter
							A	B	
LK-38	14373	3/8"	14	100	2000	1	1.00	0.22	
LK-05	14372	1/2"	14	100	1000	1	1.15	0.11	.787 - .797
LK-07	14360	3/4"	14	100	1000	1	1.45	0.12	.999 - 1.009
LK-10	14362	1"	11-1/2	100	1000	2	1.75	0.14	1.25 - 1.26
LK-12	14364	1-1/4"	11-1/2	50	500	4	2.10	0.14	1.595 - 1.605
LK-15	14366	1-1/2"	11-1/2	50	500	5	2.40	0.14	1.837 - 1.847
LK-20	14368	2"	11-1/2	25	250	12	2.95	0.14	2.307 - 2.317
LK-25	14370	2-1/2"	8	50	---	8	3.55	0.185	2.777 - 2.788
LK-30	14371	3"	8	50	---	10	3.55	0.19	3.403 - 3.414
LK-35	14372	3-1/2"	8	25	---	15	4.20	0.19	3.892 - 3.904
LK-40	14374	4"	8	25	---	16	4.75	0.19	4.399 - 4.411
LK-50	14375	5"	8	15	---	98	6.69	0.40	3.892 - 3.904
LK-60	14376	6"	8	10	---	182	7.94	0.40	4.399 - 4.411

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4
 TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268
www.nescocanada.com