



EMT Raintight Connectors

Compression Type - Steel



Features

- Compression type connectors
- Concrete tight and raintight
- Assembled with a steel locknut & gasket
- Also available with insulated throat

Applications

- Use to join EMT to box or enclosure in dry or wet locations



Standard Material


- Steel

Standard Finish

- Zinc plated

Certification

- UL File #: E325997

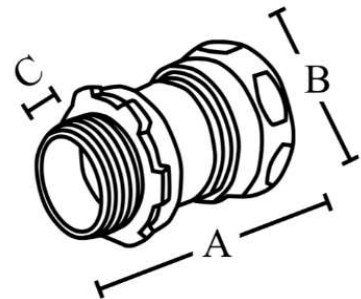

Catalog Number	UPC	Size	Box Qty	Ship Case	Weight (lb) per 100	Inches		
						A	B	C
TRTSC-05	15561	1/2"	25	250	8	0.689	0.50	1.125
TRTSC-07	15563	3/4"	25	250	18	0.75	0.50	1.375
TRTSC-10	15565	1"	20	100	23	0.846	0.562	1.687
TRTSC-12	15567	1-1/4"	25	---	40	1.687	1.012	2.062
TRTSC-15	15568	1-1/2"	20	---	54.5	1.717	1.062	2.25
TRTSC-20	15569	2"	15	---	75	1.875	1.125	2.75
TRTSC-25	15570	2-1/2"	12	---	119.2	1.968	1.562	3.625
TRTSC-30	15571	3"	6	---	173	2.689	1.562	4.25
TRTSC-35	15572	3-1/2"	5	---	238	2.812	1.812	4.687
TRTSC-40	15573	4"	6	---	264	2.812	1.812	5.187

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4
 TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268
www.nescocanada.com