



Saddle Type Connectors

L-16, L-17, L-18, L-19 - Zinc Die Cast

Features

- Wide clamping range on a various cable types
- Tri-Drive Screws

Applications


- Saddle type connector used to join flexible metal conduit or NM to box or enclosure as per following wire types/ranges:
- **L-16** For Fe AC/HCF AC .475-.565, Al AC/HCF AC .464-.610, MCI .455-.565, Al MCI .455-.610, NM Cable 14/2 - 8/3, SJO 18/3-12/3, .305-.440, 3/8" FE or Al
- **L-17** For Fe AC/Fe HCF AC/Fe & Al MCI 8/3 to 6/3, 0.690"-0.850", Al AC/Al HCF AC 8/3 to 6/3, 0.685"-0.835", Al MCI-A/HCF MCI-A 8/3 to 6/3, NM cable 8/3 to 6/3, 1/2" Fe & Al FMC/RWFMC/XRWFMC
- **L-18** For Fe AC/HCF AC 6/3 to 6/4, 0.853"-0.906", Al AC/HCF AC 6/3 to 6/4, 0.823"-0.913", Fe & Al MCI 6/3 to 4/3, 0.850"-1.088", Al MCI-A/HCF MCI-A 6/4, 1.043", 3/4" Fe & Al FMC/RWFMC
- **L-19** For Fe AC/HCF AC 2/4, 1.311", Al AC/HCF AC 2/4, 1.285", Fe MCI 1/3 to 1/0-3, 1.165"-1.220", Al MCI 1/3 to 1/0-3, 1.145"-1.250", Al MCI-A/HCF MCI-A 6/4, 1.043", 1" Fe & Al FMC/RWFMC

Standard Material

- Zinc Die Cast

Certification

- UL File #: E331589

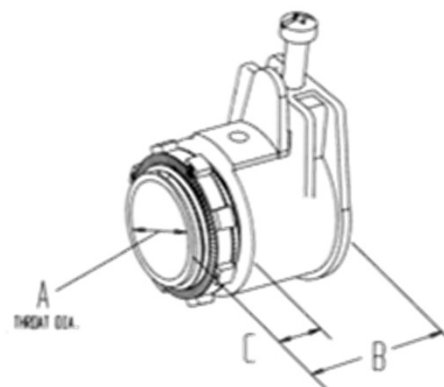

Catalog Number	UPC	Size	Box Qty	Ship Case	Weight (lb) per 100	Inches		
						A	B	C
L-16	14302	3/8" (1/2"KO)	50	500	10	0.62	0.94	0.40
L-17	14304	1/2"	50	200	12	0.62	1.38	0.40
L-18	14305	3/4"	25	100	19	0.82	1.54	0.50
L-19	14307	1"	10	100	23	1.03	1.62	0.51

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com