



Rigid Conduit Nipples

Zinc Die Cast

Features

- Corrosion resistant
- Use with locknuts
- Also available with insulated throat

Applications


- Serves as a short raceway between enclosures

Standard Material

- Zinc die cast

Certification

- UL File #: E224953

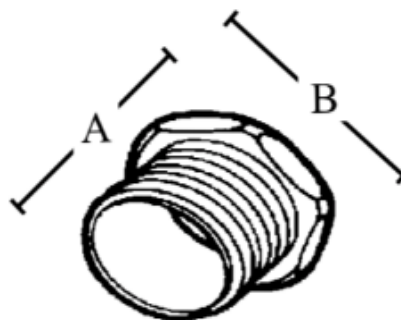

Catalog Number	UPC	Size	Box Qty	Ship Case	Weight (lb) per Box Qty	Inches	
						A	B
751Z	16643	1/2"	100	1000	3	0.68	1.02
751ZL	12734	1/2" x 1" L	100	1000	3.2	1	1.02
752Z	16444	3/4"	50	500	3	0.75	1.29
752ZL	12737	3/4" x 1" L	50	500	3.3	1	1.29
753Z	16445	1"	25	250	3	0.87	1.53
754Z	12740	1-1/4"	25	100	2	0.94	1.89
755Z	16447	1-1/2"	25	100	2	0.91	2.30
756Z	16448	2"	5	50	2	1.07	2.88
757Z	16449	2-1/2"	25	---	15	1.38	3.39
758Z	16450	3"	10	---	9	1.44	4.06
759Z	16451	3-1/2"	10	---	11.5	1.47	4.61
760Z	16452	4"	10	---	12	1.47	5.15

Nesco Inc.

1039 Cardiff Blvd., Mississauga, ON L5S 1P4

TF: (866) 466-3726 Tel: (905) 793-2218 Fax: (905) 793-2268

www.nescocanada.com

Ref. 1