

Ordering Information


Description	Line Voltage (AC)	Male Plug	Female Connector
3 wire.	208V, 250V, 480V	HBLBA3M	HBLBA3F
	125V, 277V, 347V	HBLBA3MN	HBLBA3FN
4 wire.	3Ø 250V, 380-415V, 3Ø 480V	HBLBA4M	HBLBA4F
	120/208V, 125/250V	HBLBA4MN	HBLBA4FN

Technical Information

Specifications

Max. Working Amperage	60A
Max. Working Voltage	480V AC; 250V DC @ 30A
Environmental Ratings	UL Type 4X and IP69K
Operating Temperature	Max continuous +75°C Min continuous -40°C
Cord Gauge Range	12AWG S, SO, - 6AWG S, SO, SOW
Cord Diameter Range	0.500" - 1.250"
Max. Coupling Force	130 lbs.
Weight	Male plug 1.8 lbs. Female connector 2.0 lbs.
Endurance	Min 6,000 mating cycles
UV Resistance	All materials are UV stabilized
Listings	UL1682 File E146033
Auxiliary Contact Rating	10A 120VAC and 3A 24VDC

Product Dimensions

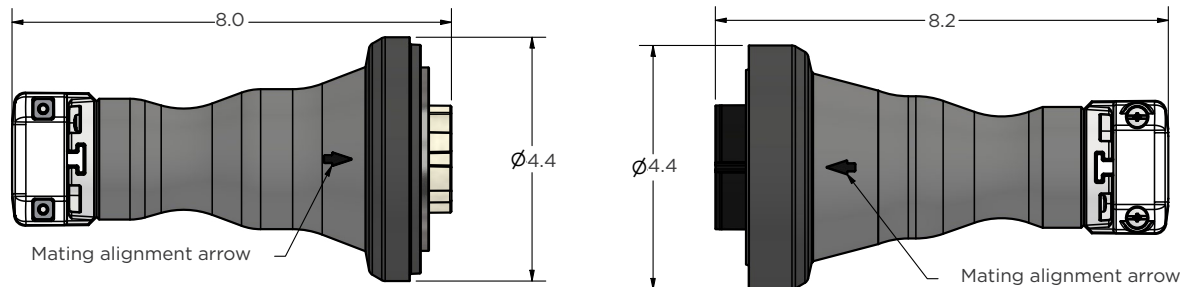

Dimensions in Inches (mm)